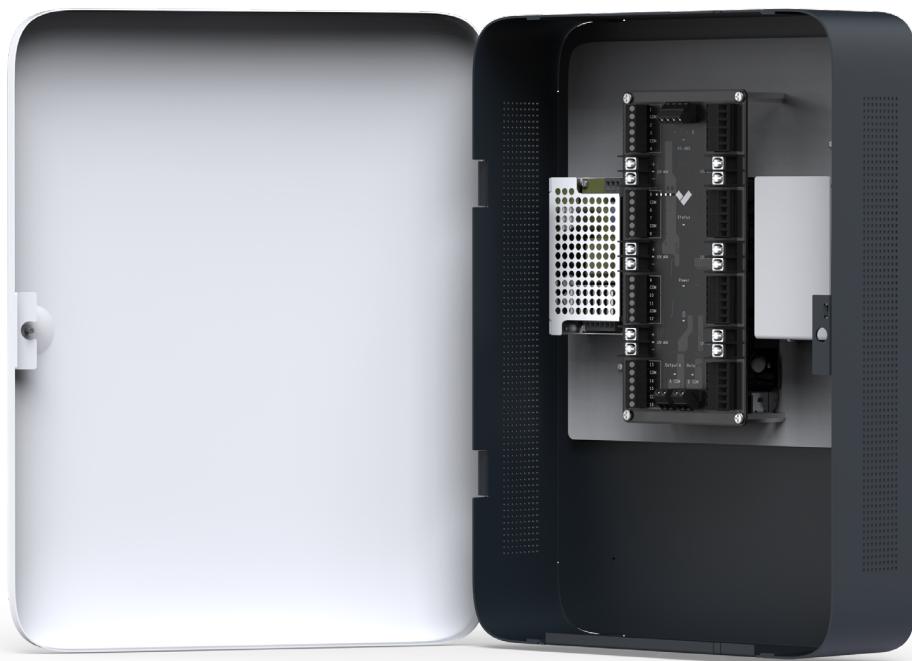


BP41

## Alarm Panel

**CLASSIC ALARMS**

The BP41 alarm panel allows customers to incorporate third-party wired intrusion sensors into their Verkada Alarms solution. The panel also supports two wired outputs for signaling devices, such as sirens or strobe lights.

### Complete coverage

- 32 inputs for connecting wired sensors
- 12V AUX for powered sensors
- Two programmable 12V power outputs for sirens, strobes, and other alarm signaling devices

### Easy install and management

- Cloud-managed from Command for easy device configuration and monitoring
- Wired in minutes with ergonomic, easy-to-access 45° offset screw terminals
- Optionally connect BK11/BK21 Alarm Keypads to the panel using existing alarm wiring via RS485, rather than needing to install new cables

### Stays connected

- Terminals for easy connection to one or more backup batteries (sold separately)
- Compatible with the ACC-CEL-LTE accessory for plug-and-play backup cellular connectivity

### 10-year warranty

- Covered by our industry-leading 10-year warranty
- Receives automatic firmware updates for the latest features and security enhancements



## BP41 Alarm Panel

### Tech Specs



BP41

#### Power and network

<b>Power Consumption</b>	60W (at 10 to 14V)	<b>Connectivity</b>	Ethernet: 100/1000Mbps RJ-45 cable connector for network connection, USB 2.0
--------------------------	--------------------	---------------------	--

#### Panel features

<b>Inputs</b>	32 inputs for normally open or normally closed sensors Optional 1 kΩ single or double EOL/R supervision	<b>Outputs</b>	2x 12V programmable outputs; 1A each 12V AUX power; 2A total / combined
---------------	--	----------------	--

#### General

<b>Dimensions</b>	Height: 415.6mm / 16.36in Width: 319.6mm / 12.58in Depth: 11.74mm / 4.4in	<b>Operating Temperature</b>	0°C to 50°C / 32°F to 122°F
<b>Weight</b>	8.19kg / 18.06lbs	<b>Warranty</b>	10 years
<b>Certifications</b>			FCC, CE, UKCA, VCCI, NDAA

#### Installation

<b>Included Accessories</b>	Setup guide, screw pack, torx screwdriver, AC cord, 32x 1 kΩ end-of-line resistors	<b>Mounting Options</b>	Drywall anchors (M8) and screws (M5)
-----------------------------	--	-------------------------	--------------------------------------



## BR11 Wired Motion Sensor

### Tech Specs

**BR11**

### Power and network

<b>Power Supply</b>	8–16VDC; 15mA at 12VDC
---------------------	------------------------

### Sensor features

<b>Field of View</b>	90°, 15m / 49ft maximum	<b>Tamper Switch</b>	Normally closed. 50mA at 30VDC
<b>Sensitivity</b>	Selectable: standard or high	<b>Temperature Compensation</b>	Bi-directional

### General

<b>Warranty</b>	10 years	<b>Certifications</b>	FCC, CE, ICES, UKCA, RCM, NOM, NDAA
-----------------	----------	-----------------------	-------------------------------------

### Installation

<b>Included Accessories</b>	Wall screws, wall anchors
-----------------------------	---------------------------



## BR12/BR13 Wired Door Contact sensor

### Tech Specs

**BR12****BR13**

#### Power

##### Switching Voltage / Current

30VDC max, 0.5A

30VDC max, 0.5A

#### Sensor features

##### Mount Style

Surface mount

Recessed mount

##### Switch Style

Normally closed

Normally closed

#### General

##### Dimensions

**Sensor:**  
Height: 9.5mm / 0.37in  
Width: 50.8mm / 2.0in  
Depth: 8.3mm / 0.33in**Magnet:**  
Height: 9.5mm / 0.37in  
Width: 50.8mm / 2.0in  
Depth: 8.3mm / 0.33in**Sensor:**  
Diameter: 9.5mm to 11mm / 0.37in to 0.43in  
Length: 23.3mm / 0.92in**Magnet:**  
Diameter: 9.5mm to 11mm / 0.37in to 0.43in  
Length: 14.8mm / 0.58in

##### Gap Width

6.5mm to 31.75mm / 0.26 to 1.25in

6.5mm to 15.24mm / 0.26 to 0.6in

##### Resistance

100mΩ initial contact resistance

100mΩ initial contact resistance

##### Operating Temperature

-40°C to 60°C / -40°F to 122°F

-40°C to 60°C / -40°F to 122°F

##### Certifications

FCC, CE, ICES, UKCA, RCM, NOM, NDAA

FCC, CE, ICES, UKCA, RCM, NOM, NDAA

##### Warranty

10 years

10 years

#### Installation

##### Included Accessories

Wall screws, wall anchors

-



## Ordering Information

### BP41 Alarm Panel pricing

Model Number	Description	Cost (MSRP) USD
BP41-HW	BP41 Alarm Panel	\$999

### BR11-BR13 Wired Sensor pricing

BR11-HW	Wired Motion Sensor	\$99
BR12-HW	Wired Surface Mount Door Contacts - 5 Pack	\$99
BR13-HW	Wired Recess Mount Door Contacts - 5 Pack	\$99

\*An Alarm License is not required for user talk down via the BZ11, but is required for professional monitoring talk down or to play automated messages.



## Ordering Information

### LIC-BB Basic Alarm License pricing\*

Includes alarm monitoring with no video verification

Model Number	Description	Cost (MSRP) USD
LIC-BB-1Y	1-Year Basic Alarm License	\$600
LIC-BB-3Y	3-Year Basic Alarm License	\$1,800
LIC-BB-5Y	5-Year Basic Alarm License	\$3,000
LIC-BB-10Y	10-Year Basic Alarm License	\$6,000

### LIC-BA Standard Alarm License pricing\*

Includes professional monitoring with video verification, up to 100 events/month

LIC-BA-1Y	1-Year Standard Alarm License	\$1,500
LIC-BA-3Y	3-Year Standard Alarm License	\$4,500
LIC-BA-5Y	5-Year Standard Alarm License	\$7,500
LIC-BA-10Y	10-Year Standard Alarm License	\$15,000

### LIC-BV Premium Alarm License pricing\*

Includes professional monitoring with video verification, up to 1,000 events/month

LIC-BV-1Y	1-Year Premium Alarm License	\$12,000
LIC-BV-3Y	3-Year Premium Alarm License	\$36,000
LIC-BV-5Y	5-Year Premium Alarm License	\$60,000
LIC-BV-10Y	10-Year Premium Alarm License	\$120,000

\*One Alarm License needed per physical address; required to operate all Verkada Alarms hardware.