


ACC-MNT-REC-2 Recess Ceiling Mount

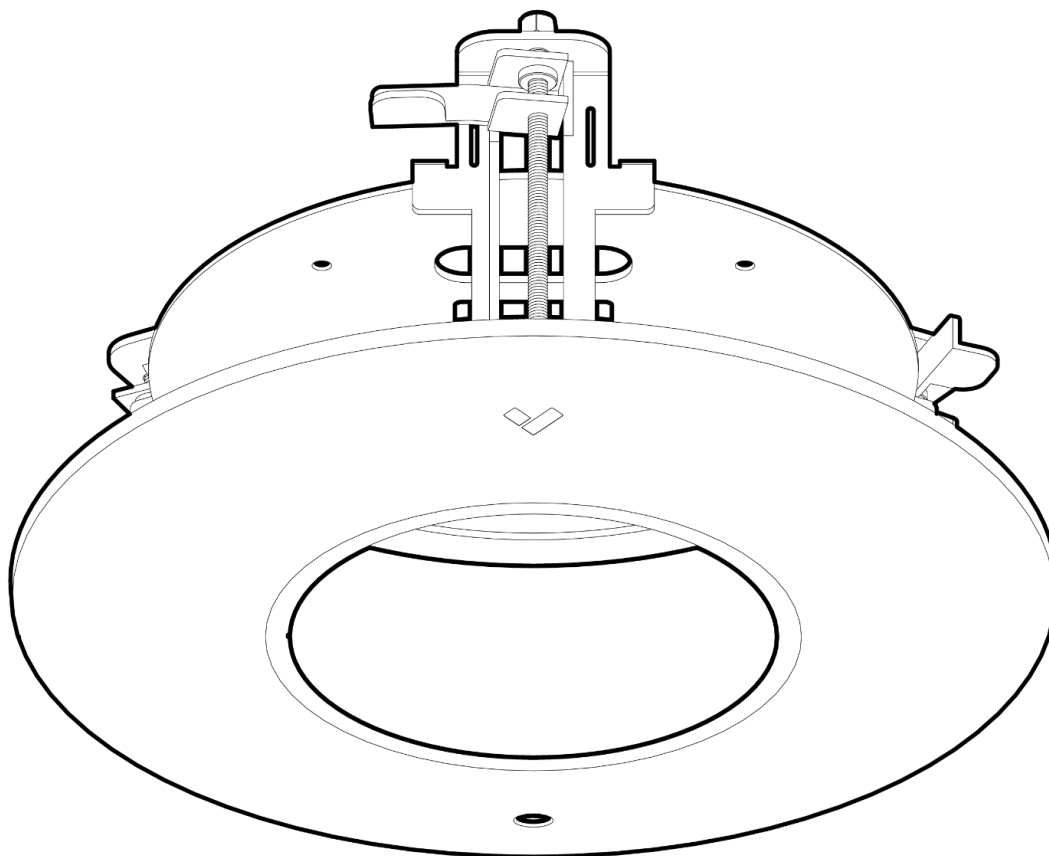

Document Details

Version

V1.0 20241111

(V1.0 published 20241111)

Firmware

Firmware version can be verified on Verkada
Command command.verkada.com.

Product Models

This install guide pertains to model
ACC-MNT-REC-2.

© Copyright 2024 Verkada Inc. All rights reserved.

Verkada and the Verkada logo are registered trademarks or service marks of Verkada Inc. ("Verkada"). All other trademarks are the property of their respective owners.

Verkada may make changes to this document at any time without notice. The information presented herein may be inaccurate or outdated, and Verkada is under no obligation to maintain it. ALL INFORMATION IS PROVIDED "AS-IS" AND WITHOUT ANY WARRANTIES, IMPLIED, EXPRESS, OR OTHERWISE. VERKADA DISCLAIMS LIABILITY FOR ALL DAMAGES, INCLUDING WITHOUT LIMITATION ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES, ARISING OUT OF USE OF THIS DOCUMENT.


Any intellectual property rights relating to Verkada products are and shall remain Verkada's exclusive property. Use of any Verkada product is subject to Verkada's end user agreement or other executed agreement with Verkada. No license, either expressed or implied, to use or distribute any Verkada product is granted under this document.

This document may not be sold, resold, licensed or sublicensed and may not be transferred without Verkada's prior written consent. No part of this document may be reproduced in whole or in part without the express written consent of Verkada.



Introduction


What's in the box

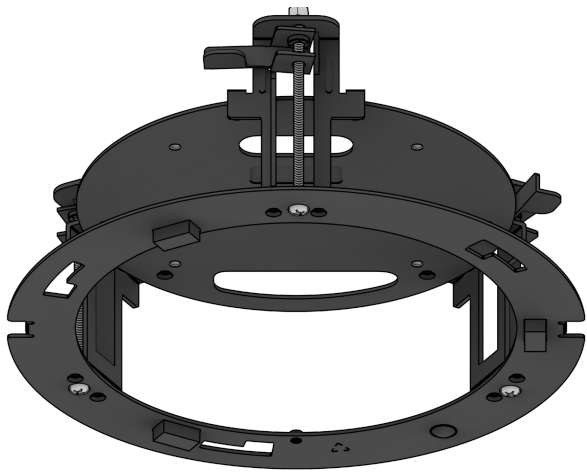

**Recess Ceiling Mount
Bracket**



Hole Cutout Template

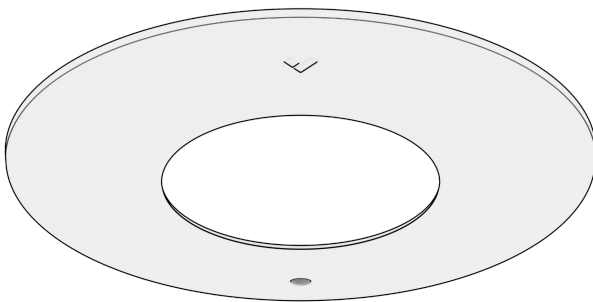

**Recess Ceiling Mount
Cover**



M4x0.7 Machine Screw (4 pcs)
Length: 8mm Drive: #2 Phillips

What you'll need

- A Verkada Indoor Dome Camera
- A T10 Torx Security Screwdriver
- A #2 Phillips screwdriver or power drill with a #2 Phillips driver bit
- A utility knife


Compatible products

For a list of compatible products, please visit:

<https://docs.verkada.com/docs/accessories-overview.pdf>

Overview

Order of assembly:

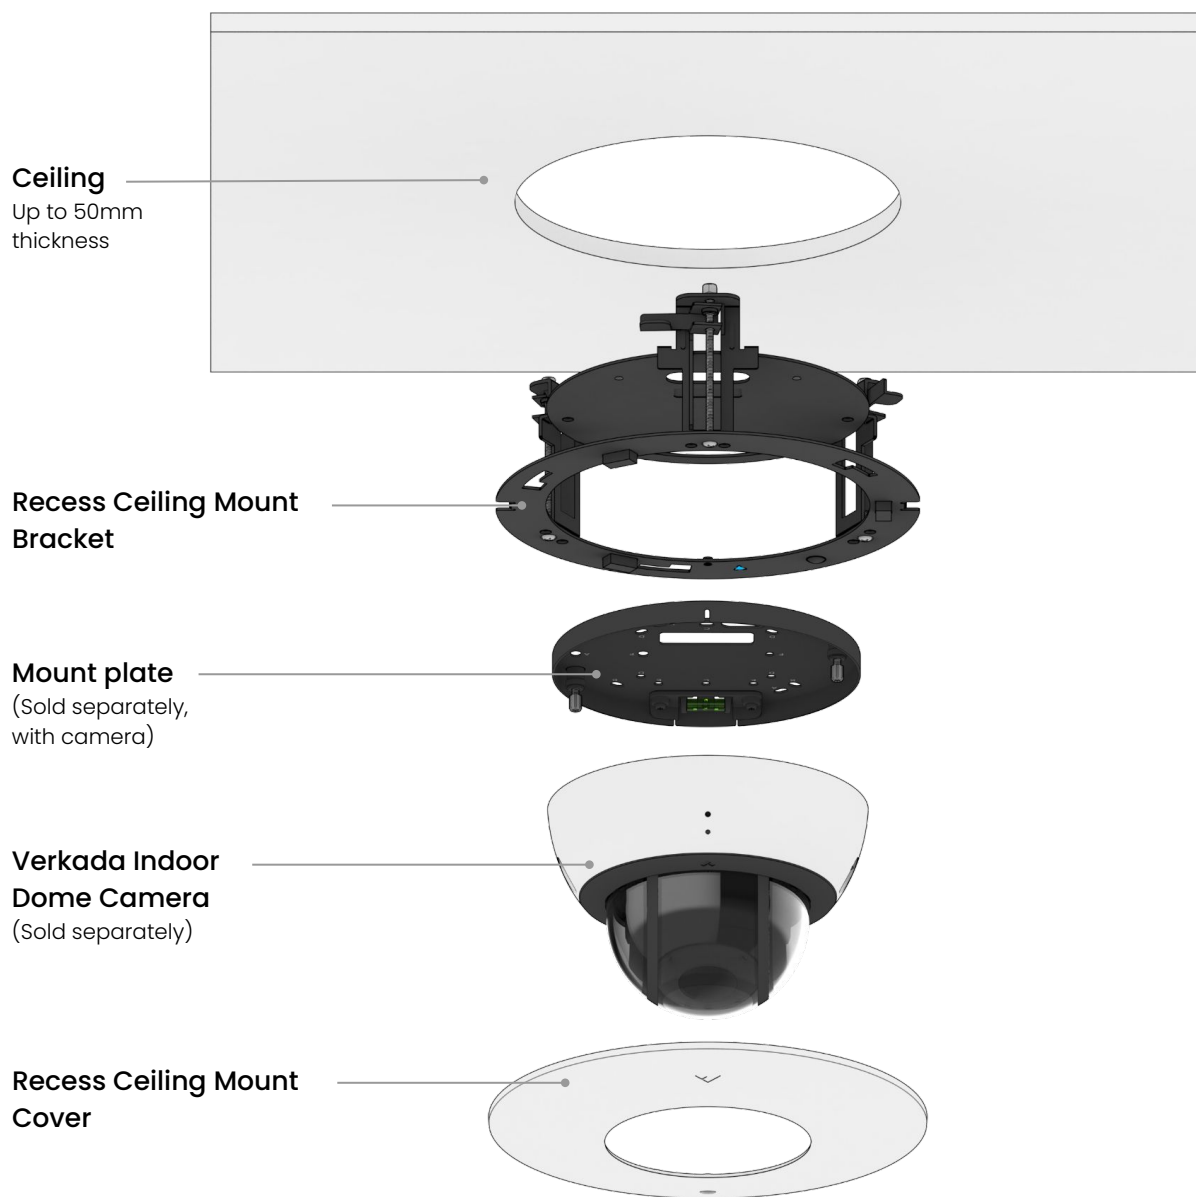


Installation

Mounting (1/5)

Retrieve the indoor dome camera.

Unscrew the screws on the cover, using the T10 Torx Security Screwdriver.

Lift the cover and bubble and set them aside.

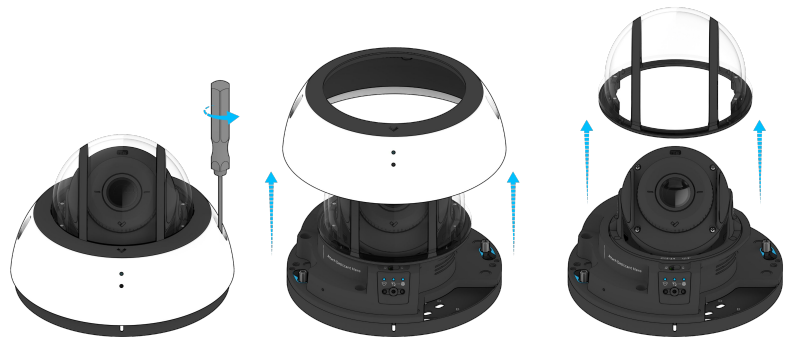


Loosen the mount plate thumb screws using the T10 Security Screwdriver.

Rotate and lift the camera to separate it from the mount plate.



Attach the camera mount plate to the Recess Ceiling Mount Bracket using the provided M4 screws.

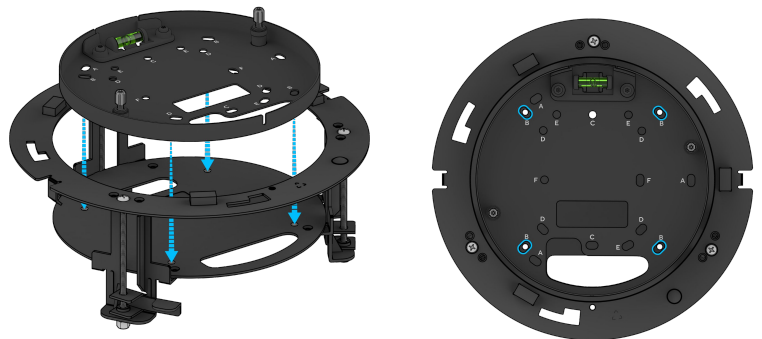


Installation


Mounting (2/5)

Identify the desired mounting location on the ceiling and adhere the Hole Cutout Template.

Cut a hole, following the outline of the template, using a utility knife.

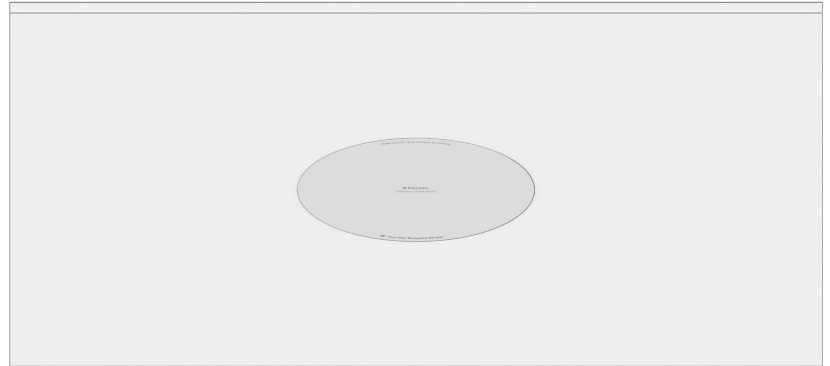

Bring the Ethernet cable through the hole.

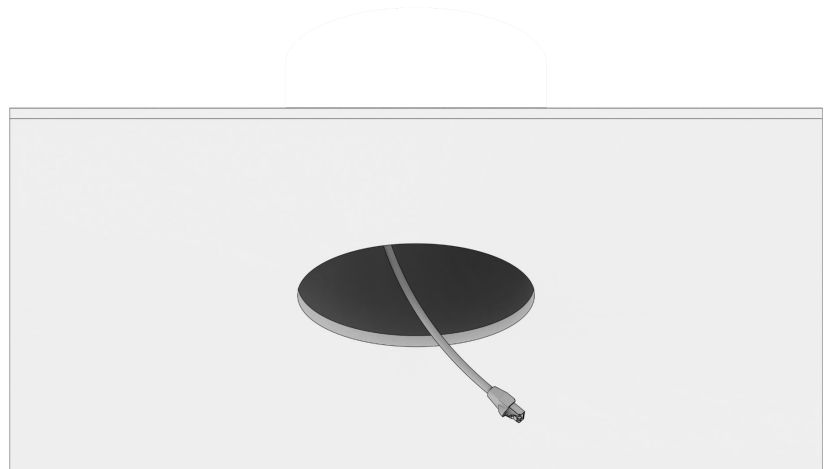

Thread the Ethernet cable through the assembly (mount plate and the Recess Ceiling Mount Bracket).

Firmly press the assembly into the ceiling hole.

To secure the assembly, tighten the screws (circled in blue) using a power drill with a #2 Phillips head.

The mount bracket will clamp onto the drop ceiling.



Installation

Mounting (3/5)

Connect the Ethernet cable to the camera.



Place the camera over the mount plate thumb screws and twist clockwise.



Tighten the mount plate thumb screws with the T10 Security Torx Screwdriver.



Installation

Mounting (4/5)


Carefully place the clear bubble back onto the camera base. The magnets will guide the bubble into position.



Align the screw positions on the camera cover to the corresponding holes on the camera base and hold it in place.



Tighten the two T10 Torx Security Screws.

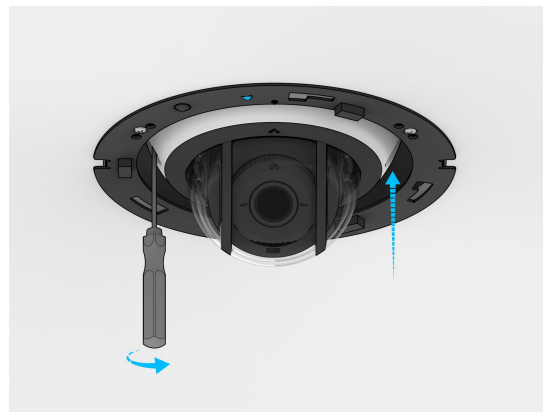


Installation

Mounting (5/5)

Align the captive screw on the plastic cover with the blue indicator on the mounting bracket.



Twist to lock the cover.

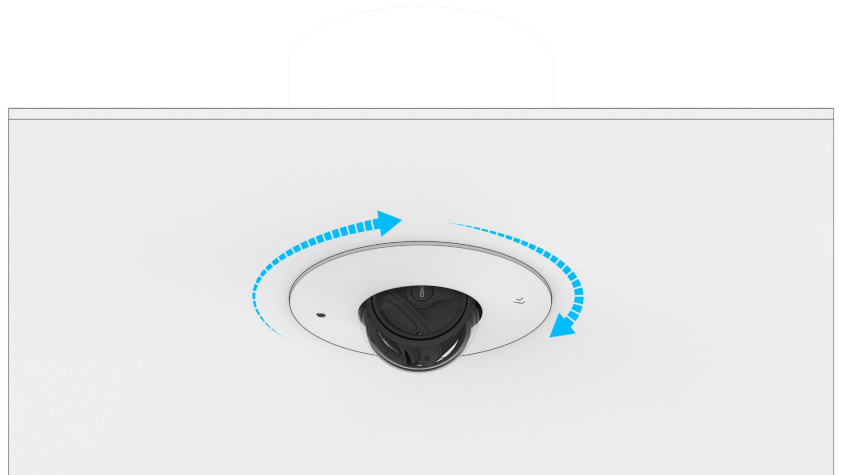

Tighten the plastic cover with the T10 security screwdriver.



Appendix

Support

Thank you for purchasing this Verkada product. If for any reason you're experiencing issues or need assistance, please contact our 24/7 Technical Support Team immediately.

Sincerely,
The Verkada Team
verkada.com/support

