


BP41

Alarm Panel

CLASSIC ALARMS

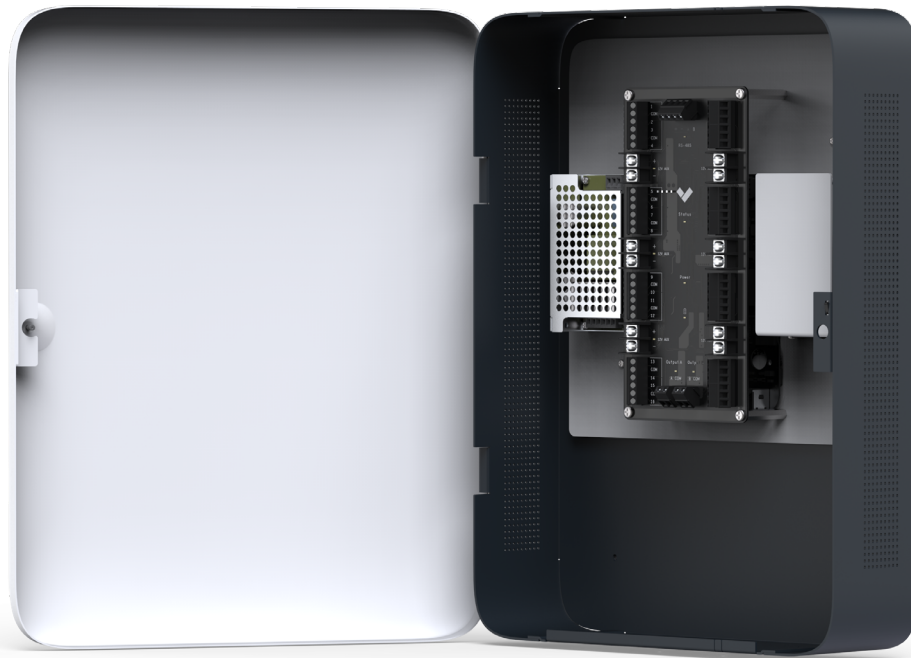

The BP41 alarm panel allows customers to incorporate third-party wired intrusion sensors into their Verkada Alarms solution. The panel also supports two wired outputs for signaling devices, such as sirens or strobe lights.

Complete coverage

- 32 inputs for connecting wired sensors
- 12V AUX for powered sensors
- Two programmable 12V power outputs for sirens, strobes, and other alarm signaling devices

Easy install and management

- Cloud-managed from Command for easy device configuration and monitoring
- Wired in minutes with ergonomic, easy-to-access 45° offset screw terminals
- Optionally connect BK11/BK21 Alarm Keypads to the panel using existing alarm wiring via RS485, rather than needing to install new cables

Stays connected

- Terminals for easy connection to one or more backup batteries (sold separately)
- Compatible with the ACC-CEL-LTE accessory for plug-and-play backup cellular connectivity

10-year warranty

- Covered by our industry-leading 10-year warranty
- Receives automatic firmware updates for the latest features and security enhancements



BP41 Alarm Panel

Tech specs



BP41

Power and network

Power consumption	60W (at 10 to 14V)	Connectivity	Ethernet: 100/1000Mbps RJ-45 cable connector for network connection, USB 2.0
-------------------	--------------------	--------------	--

Panel features

Inputs	32 inputs for normally open or normally closed sensors Optional 1 kΩ single or double EOLR supervision	Outputs	2x 12V programmable outputs; 1A each 12V AUX power; 2A total / combined
--------	---	---------	--

General

Dimensions	Height: 16.36in / 415.6mm Width: 12.58in / 319.6mm Depth: 4.4in / 11.74mm	Operating temperature	32°F to 122°F / 0°C to 50°C
Weight	18.06lb / 8.19kg	Warranty	10 years
		Certifications	FCC, CE, UKCA, VCCI, NDAA

Installation

Included accessories	Setup guide, screw pack, torx screwdriver, AC cord, 32x 1kΩ end-of-line resistors	Mounting options	Drywall anchors (M8) and screws (M5)
----------------------	---	------------------	--------------------------------------



BR11 Wired Motion Sensor

Tech specs



BR11

Power and network

Power Supply	8-16VDC; 15mA at 12VDC
--------------	------------------------

Sensor features

Field of view	90°, 15m / 49ft maximum	Tamper switch	Normally closed. 50mA at 30VDC
Sensitivity	Selectable: standard or high	Temperature compensation	Bi-directional

General

Warranty	10 years	Certifications	FCC, CE, ICES, UKCA, RCM, NOM, NDAA
----------	----------	----------------	-------------------------------------


Installation

Included accessories	Wall screws, wall anchors
----------------------	---------------------------



BR12/BR13 Wired Door Contact sensor

Tech specs



BR12



BR13

Power

Switching voltage / current	30VDC max, 0.5A
-----------------------------	-----------------

30VDC max, 0.5A

Sensor features

Mount style	Surface mount
-------------	---------------

Recessed mount

Switch style	Normally closed
--------------	-----------------

Normally closed

General

Dimensions

Sensor:
Height: 0.37in / 9.5mm
Width: 2.0in / 50.8mm
Depth: 0.33in / 8.3mm

Magnet:
Height: 0.37in / 9.5mm
Width: 2.0in / 50.8mm
Depth: 0.33in / 8.3mm

Sensor:
Diameter: 0.37in to 0.43in / 9.5mm to 11mm
Length: 0.92in / 23.3mm

Magnet:
Diameter: 0.37in to 0.43in / 9.5mm to 11mm
Length: 0.58in / 14.8mm

Gap Width	0.26 to 1.25in / 6.5mm to 31.75mm
-----------	-----------------------------------

0.26 to 0.6in / 6.5mm to 15.24mm

Resistance	100mΩ initial contact resistance
------------	----------------------------------

100mΩ initial contact resistance

Operating Temperature	-40°F to 122°F / -40°C to 60°C
-----------------------	--------------------------------

-40°F to 122°F / -40°C to 60°C

Certifications	FCC, CE, ICES, UKCA, RCM, NOM, NDAA
----------------	-------------------------------------

FCC, CE, ICES, UKCA, RCM, NOM, NDAA

Warranty	10 years
----------	----------

10 years

Installation

Included Accessories	Wall screws, wall anchors
----------------------	---------------------------

-



Ordering information

BP41 Alarm Panel

Model number	Description	US cost (MSRP) ^{USD}	WW cost (MSRP) ^{USD}
BP41-HW	BP41 Alarm Panel	N/A	\$999

BR11-BR13 Wired Sensors

Model number	Description	US cost (MSRP) ^{USD}	WW cost (MSRP) ^{USD}
BR11-HW	Wired Motion Sensor	\$99	\$99
BR12-HW	Wired Surface Mount Door Contacts - 5 Pack	\$99	\$99
BR13-HW	Wired Recess Mount Door Contacts - 5 Pack	\$99	\$99

*An Alarm License is not required for user talk down via the BZ11, but is required for professional monitoring talk down or to play automated messages.



Ordering information

Basic Alarms license*

Includes alarm monitoring with no video verification

Model number	Description	US cost (MSRP) ^{USD}	WW cost (MSRP) ^{USD}
LIC-BB-1Y-RNW	1-Year Basic Alarm License, Renewal	\$600	\$600
LIC-BB-3Y-RNW	3-Year Basic Alarm License, Renewal	\$1,800	\$1,800
LIC-BB-5Y-RNW	5-Year Basic Alarm License, Renewal	\$3,000	\$3,000
LIC-BB-10Y-RNW	10-Year Basic Alarm License, Renewal	\$6,000	\$6,000

Standard Alarms license*

Includes professional monitoring with video verification, up to 100 events/month

Model number	Description	US cost (MSRP) ^{USD}	WW cost (MSRP) ^{USD}
LIC-BA-1Y-RNW	1-Year Basic Alarm License, Renewal	\$1,500	\$1,500
LIC-BA-3Y-RNW	3-Year Basic Alarm License, Renewal	\$4,500	\$4,500
LIC-BA-5Y-RNW	5-Year Basic Alarm License, Renewal	\$7,500	\$7,500
LIC-BA-10Y-RNW	10-Year Basic Alarm License, Renewal	\$15,000	\$15,000

*One alarm license needed per physical address; required to operate all Verkada Alarms hardware.