


CB63-E Bullet Camera

Highly-detailed 4K coverage in outdoor environments

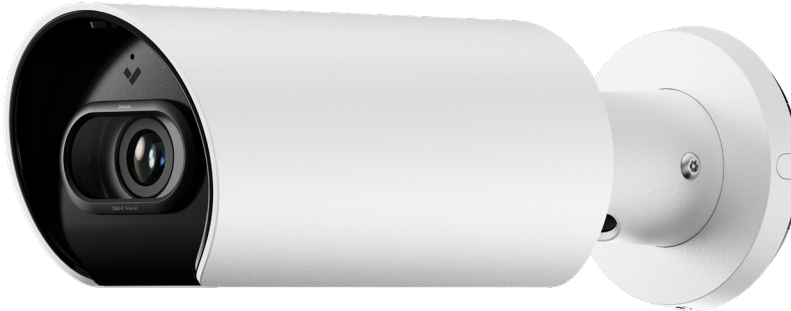

Overview

The CB63-E Bullet Camera features a 1 / 1.2" progressive CMOS image sensor, varifocal lens with 2.25x optical zoom, and IR LEDs with 164 feet / 50 meters of range for detailed 4K coverage in a variety of lighting and weather conditions. The CB63-E includes an onboard CV72S Ambarella processor for advanced analytics like AI-powered unified timeline, AI-powered activity detection alerts, occupancy trends, and person of interest (POI) alerts. In addition, the CB63-E supports license plate recognition (LPR), enabling the device to capture license plates on vehicles traveling at speeds up to 80 mph / 128 kph across as many as three lanes of traffic. The CB63-E is ideal for exterior coverage and perimeter protection, delivering highly-detailed coverage designed for areas with frequent people and vehicle traffic. Its LPR capabilities can also grant access at vehicle gates, or be used to monitor vehicle flow and occupancy in a given area.

The CB63-E withstands demanding environments with an IP66/67 weather rating and IK10 impact rating. A built-in visor keeps precipitation out of the camera's field of view, while a proprietary internal heating mechanism combats condensation. The underside of the device features an attachment interface that can be used to connect external IR or white light illuminators. Designed with easy and efficient installation top-of-mind, the CB63-E features a single tool install, a latch-based cable gland for easy PoE threading, and LED status light indicators.

Key features

Superior image quality

- 1 / 1.2" progressive CMOS image sensor
- 4K resolution
- Varifocal lens with 2.25x optical zoom
- 164 feet / 50 meters of IR range for optimal nighttime viewing

Advanced analytics

- Onboard CV72S Ambarella processor enables advanced analytics
- License plate recognition capabilities capture license plates at speeds up to 80 mph / 128 kph
- AI-powered unified timeline and AI-powered activity detection alerts
- Occupancy trends and LPR zones for operational insights

Hybrid cloud architecture

- Onboard storage and processing for reduced bandwidth consumption and coverage at scale
- 30 - 120 days (512GB - 3TB) of onboard storage
- Redundant cloud backup and unlimited cloud-based archiving of footage

Streamlined installation

- Attachment interface for connecting external IR or white light illuminator
- Latch-based cable gland for easy PoE threading
- Mount plate, junction box adapter, and screw pack included
- Three-LED status light indicator

Durability and weather protection

- IP66/67 weather rating
- IK10 impact rating
- Operability between -40°F to 122°F / -40°C to 50°C



CB63-E

Tech specs

Camera features

Image sensor	1 / 1.2" progressive CMOS	Shutter speed	1 / 30 sec. to 1 / 10,000 sec.
Sensor resolution¹	4K (3840 x 2160)	Day/night	IR-cut filter for day and night function
Lens type	Varifocal; motorized zoom	IR-cut filter	Yes
Focal length	5.9mm - 13.3mm	IR range	164ft / 50m
Aperture	F1.5 - F2.9	Minimum illumination	0.009 lux @ F1.9 (color) 0 lux with onboard IR illuminators on
Iris	P-Iris	Onboard storage	Capacity: from 512GB to 3TB Card: microSD, SDXC
Field of view (after LDC²)	Horizontal: 110° - 50° (108° - 48°) Vertical: 59° - 28° (58° - 27°) Diagonal: 114° - 56° (112° - 54°)	CPU	Ambarella CV72S66
Camera movement	Tilt: 0° to 90° Pan: 360° Rotation: 360°		

Standard video settings

Compression	H.265, H.264	Historical video settings	Adaptive quality ¹
Frame rate³	24fps	Live streaming settings	High quality (HQ): up to 4,500 kbps (default) Standard quality (SQ): up to 600 kbps

Standard audio settings

Audio	Not supported
--------------	---------------

Power and network

Power input⁴	With IR: IEEE 802.3at Type 2 PoE+ Without IR: IEEE 802.3at Type 2 PoE+ Extended temperature range: IEEE 802.3at Type 2 PoE+	Connectivity	RJ-45 cable connector for network/PoE connection; 10 / 100 / 1000 Mbps
Power consumption⁴	With IR: 43-57V, 0.48-0.36A, 23.0W Without IR: 43-57V, 0.27-0.20A, 12.1W Extended temperature range: 43-57V, 0.60-0.45A, 25.5W	RTSP	RTSP 1.0 RFC 2326 Max concurrent streams: 2 Audio: not supported

1. All our cameras record in "adaptive quality," capturing both standard (SQ) and high quality (HQ) streams. SQ video is stored up to the amount of retention specified by the customer. The amount of HQ video stored on the camera will depend on the amount of motion detected by the camera over time. To learn more, visit our website: <https://docs.verkada.com/docs/adaptive-quality-recording-whitepaper.pdf>.

2. Lens Distortion Correction (LDC) crops the sensor field of view to deliver a rectified, undistorted output image.

3. Frame rate can be adjusted by support.

4. Extended temperature range includes operating temperatures below 14°F / -10°C and assumes IR will be enabled.



CB63-E

Tech specs



General

Operating temperature	-40°F to 122°F / -40°C to 50°C	LED indicators	System power and status indicator, debug indicator
Humidity	0 to 90%	Warranty	10 years
Certifications	FCC, ICES, CE, UKCA, RCM, VCCI, BIS, KC, BSMI, UL/IEC62368-1, IP66/67 weather rating, IK10 impact rating	Included accessories	T25 L-key, cable glands, 4x #8 wall screws, 4x wall anchors, 4x M4 machine screws, junction box adapter cover, junction box adapter plate, conduit adapter

Mechanical

Weight	Camera: 62.79oz / 1780g Mount plate: 2.82oz / 80g	Body	Aluminum
Dimensions	L: 11.85in / 301.0mm, Ø: 3.94in / 100.0mm		

Dimensions



Software capabilities

Alerts	Camera status, motion detection, people detection, vehicle detection, person of interest detection, crowd detection, line-crossing detection, loitering detection, AI-powered alerts	Streaming and storage	Cloud backup, configurable retention days, selectable storage location, low bandwidth mode, timelapse, RTSP
People analytics	People search, attribute search, face search, occupancy trends, motion search, trajectory analysis, selective face blurring, AI-powered search	Sharing and privacy	Live links, live face blur, privacy regions, audit log
Vehicle analytics	Vehicle search, attribute search, motion search, trajectory analysis, selective face blurring, AI-powered search	License plate recognition	License plate of interest alerts, license plate indexing



Ordering information

CB63-E pricing

Model number	MP ¹	WDR	Lens	IR range	Onboard storage	Maximum SQ onboard retention ¹	People/ vehicle analytics	US cost (MSRP) ^{USD}	WW cost (MSRP) ^{USD}
CB63-512E-HW	4K	✓	Zoom	164ft / 50m	512GB	30 days	✓	\$2,399	\$2,299
CB63-1TB-E-HW	4K	✓	Zoom	164ft / 50m	1TB	60 days	✓	\$3,799	\$3,699
CB63-2TB-E-HW	4K	✓	Zoom	164ft / 50m	2TB	90 days	✓	\$5,999	\$5,899
CB63-3TB-E-HW	4K	✓	Zoom	164ft / 50m	3TB	120 days	✓	\$8,199	\$8,099



Ordering information

Video Security software license pricing (new/capacity increase)

Model number	Description	US cost (MSRP) ^{USD}	WW cost (MSRP) ^{USD}
LIC-CAM-1Y-CAP	Verkada 1-Year Camera License, Capacity Increase	\$249	\$249
LIC-CAM-3Y-CAP	Verkada 3-Year Camera License, Capacity Increase	\$659	\$659
LIC-CAM-5Y-CAP	Verkada 5-Year Camera License, Capacity Increase	\$1,099	\$1,099
LIC-CAM-10Y-CAP	Verkada 10-Year Camera License, Capacity Increase	\$2,199	\$2,199

Video Security software license pricing (renewal)

Model number	Description	US cost (MSRP) ^{USD}	WW cost (MSRP) ^{USD}
LIC-CAM-1Y-RNW	Verkada 1-Year Camera License, Renewal	\$249	\$249
LIC-CAM-3Y-RNW	Verkada 3-Year Camera License, Renewal	\$659	\$659
LIC-CAM-5Y-RNW	Verkada 5-Year Camera License, Renewal	\$1,099	\$1,099
LIC-CAM-10Y-RNW	Verkada 10-Year Camera License, Renewal	\$2,199	\$2,199



Attachments and accessories

Recommended attachments

Model number	Description
ACC-CAM-CB-IR-1	Verkada IR Illuminator for Bullet Camera ¹
ACC-CAM-CB-WL-1	Verkada White Light Illuminator for Bullet Camera ¹

Recommended accessories

Model number	Description
ACC-CAM-MNT-CBPOLE-1	Verkada Bullet Camera Pole Mount ²
ACC-MNT-POLE-1	Verkada Pole Mount
ACC-MNT-CORNER-1	Verkada Corner Mount
ACC-MNT-SJBOX-1	Verkada Square Junction Box Mount
ACC-POE-90W-AU	Verkada 90W PoE++ (802.3bt Type 4) Injector, GigE, Indoor, Australia Type I Plug
ACC-POE-90W-EU	Verkada 90W PoE++ (802.3bt Type 4) Injector, GigE, Indoor, Europe Type F Plug
ACC-POE-90W-NA	Verkada 90W PoE++ (802.3bt Type 4) Injector, GigE, Indoor, North America Type B Plug
ACC-POE-90W-UK	Verkada 90W PoE++ (802.3bt Type 4) Injector, GigE, Indoor, United Kingdom Type G Plug
INJ-POE-PLUS	Verkada PoE+ (802.3at Type 2) Injector, GigE

1. The ACC-CAM-CB-IR-1 and ACC-CAM-CB-WL-1 are only compatible with the CB63-E and CB63-TE.
2. The ACC-CAM-MNT-CBPOLE-1 is only compatible with the CB53-E, CB63-E, CB53-TE, and CB63-TE.