

CM42-S Mini Split Camera

Compact and flexible 5MP coverage
for specialized deployments



Overview

The CM42-S mini split camera is a discreet camera, engineered to blend into a variety of environments. The compact CM42-S is comprised of a sensor unit, main unit, and 6.6-foot / 2.0-meter USB-C connecting cable, making it an ideal choice for installations in ATMs, retail settings, and other confined spaces. A 13.1-foot / 4.0-meter USB-C connecting cable is also available for deployments requiring a longer distance between the sensor unit and the main unit.

Despite the sensor's small size (H: 1.87in / 47.4mm, W: 1.43in / 36.4mm, L: 1.58in / 40.2mm), the CM42-S features 5MP resolution and an Ambarella CV25S processor, making it ideal for a variety of deployments. An audio port allows for an external microphone, enabling customers to complement video monitoring with audio recording. Its USB-C connecting cable offers flexible and customizable installation, and its HDMI output promotes streaming locally to a display, like a public viewing monitor, which are often found in retail environments. The CM42-S is engineered to capture video even in low-light conditions, making it suitable for around-the-clock monitoring.

Key features

Excellent image quality

- 1 / 2.8" progressive CMOS image sensor
- 5MP resolution
- 49 feet / 15 meters of IR range for nighttime viewing

Advanced analytics

- Onboard CV25S Ambarella processor enables people and vehicle analytics
- AI-powered search and AI-powered alerts
- Occupancy trends for operational insights

Comprehensive monitoring

- HDMI output allows customers to stream to a public viewing monitor in retail environments
- Microphone port to supplement video coverage with audio

Hybrid cloud architecture

- Onboard storage and processing for reduced bandwidth consumption and coverage at scale
- 30 or 90 days (256GB or 768GB) of onboard storage

Flexible installation

- Separate body unit enables image sensor to be deployed in compact spaces
- 6.6-foot / 2.0-meter USB-C cable included
- Double-sided tape for wall mounting main unit
- Screws and mount bracket for sensor unit
- LED light status indicator



CM42-S

Tech specs

Camera features

Image sensor	1 / 2.8" progressive CMOS	Shutter speed	1 / 30 sec. to 1 / 10,000 sec.
Sensor resolution¹	5MP (2592 x 1944)	Day/night	IR-cut filter for day and night function
Lens type	Fixed	IR-cut filter	Yes
Focal length	3.2mm	IR range	49ft / 15m
Aperture	F1.6	Minimum illumination	0.009 lux @ F1.9 (color) 0 lux with IR illuminators on
Iris	Fixed	Onboard storage	Capacity: from 256GB, 768GB Card: microSD, SDXC
Field of view (after LDC²)	Horizontal: 99° (80°) Vertical: 71° (63°) Diagonal: 107° (92°)	CPU	Ambarella CV25S88
Inputs/outputs	3.5mm audio input, micro-HDMI output, +/- AUX ⁴ with 12V / 4W power output, USB-C sensor input ³		

Standard video settings

Compression	H.265, H.264	Historical video settings	Adaptive quality ¹
Frame rate⁵	24fps	Live streaming settings	High quality (HQ): up to 3,000 kbps (default) Standard quality (SQ): up to 600 kbps
WDR technology	104 dB dynamic range, true WDR, dual exposure		

Standard audio settings

Audio	Supported	Interface	3.5mm audio input
Audio capacity	One-way audio		

Power and network

Power input⁶	With IR: IEEE 802.3af Type 1 PoE Without IR: IEEE 802.3af Type 1 PoE Extended temperature range: N/A	Connectivity	RJ-45 cable connector for network/PoE connection; 10 / 100 / 1000 Mbps
Power consumption⁶	With IR: 37-57V, 0.20-0.13A, 7.3W Without IR: 37-57V, 0.12-0.08A, 4.3W Extended temperature range: N/A	RTSP	RTSP 1.0 RFC 2326 Max concurrent streams: 2 Audio: supported

1. All our cameras record in "adaptive quality," capturing both standard (SQ) and high quality (HQ) streams. SQ video is stored up to the amount of retention specified by the customer. The amount of HQ video stored on the camera will depend on the amount of motion detected by the camera over time. To learn more, visit our website: <https://docs.verkada.com/docs/adaptive-quality-recording-whitepaper.pdf>.

2. Lens Distortion Correction (LDC) crops the sensor field of view to deliver a rectified, undistorted output image.

3. Should the customer choose to use their own USB-C cable, it must be USB-C 3.1 (or higher) speed rated.

4. +/- Aux not currently supported. Support is forthcoming.

5. Frame rate can be adjusted by support.

6. Extended temperature range includes operating temperatures below 14°F / -10°C and assumes IR will be enabled.



CM42-S

Tech specs


General

Operating temperature	14°F to 122°F / -10°C to 50°C	LED indicator	System power and status indicator
Humidity	0 to 90%	Warranty	10 years
Certifications	FCC, IC, UL/cUL/IEC 62368-1, VCCI, NOM	Included accessories	T10 security torx screwdriver, 1x 1/4"-20 screw, 4x wall screws, 4x wall anchors, 1x 6.6ft / 2.0m USB-C cable, double-sided tape for wall mounting main unit and sensor unit mount bracket

Mechanical

Weight	Camera sensor unit: 3.89oz / 110g Camera main unit: 8.56oz / 243g USB-C cable: 2.82oz / 80g	Body	Aluminum, plastic
Dimensions⁷	Camera sensor unit: H: 1.87in / 47.4mm, W: 1.43in / 36.4mm, L: 1.58in / 40.2mm Camera main unit: H: 1.00in / 25.5mm, W: 3.50in / 89.0mm, L: 5.98in / 152.0mm		

Dimensions

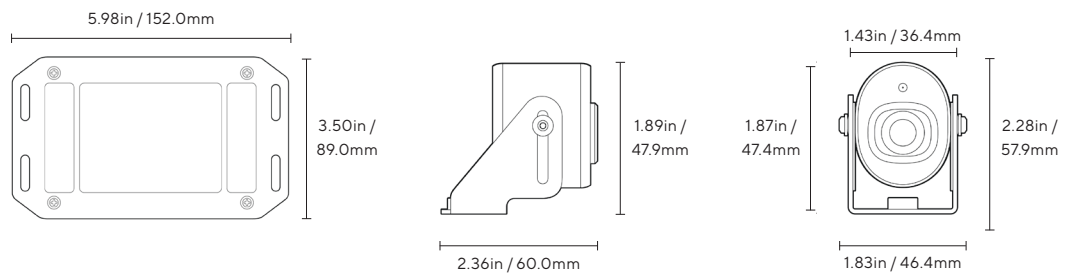

Software capabilities

Alerts	Camera status, motion detection, people detection, vehicle detection, person of interest detection, crowd detection, line-crossing detection, loitering detection, AI-powered alerts	Streaming and storage	Cloud backup, configurable retention days, selectable storage location, low bandwidth mode, timelapse, RTSP
People analytics	People search, attribute search, face search, occupancy trends, motion search, trajectory analysis, selective face blurring, AI-powered search	Sharing and privacy	Live links, live face blur, privacy regions, audit log
Vehicle analytics	Vehicle search, attribute search, motion search, trajectory analysis, occupancy trends, AI-powered search		

⁷ Mechanical dimensions listed here represent the sensor unit without the bracket attached.



Ordering information

CM42-S pricing

Model number	MP ¹	WDR	Lens	IR range	Onboard storage	Maximum SQ onboard retention ¹	People/vehicle analytics	US cost (MSRP) ^{USD}	WW cost (MSRP) ^{USD}
CM42-256S-HW	5MP	✓	Fixed	49ft / 15m	256GB	30 Days	✓	\$1,299	\$1,199
CM42-768S-HW	5MP	✓	Fixed	49ft / 15m	768GB	90 Days	✓	\$2,699	\$2,599

1. All our cameras record in "adaptive quality," capturing both standard and high quality streams. Standard quality (SQ) video is stored up to the amount of retention specified by the customer. The amount of high quality video stored on the camera will depend on the amount of motion detected by the camera over time. To learn more, visit our website: <https://docs.verkada.com/docs/adaptive-quality-recording-whitepaper.pdf>.



Ordering information

Video Security software license pricing (new/capacity increase)

Model number	Description	US cost (MSRP) ^{USD}	WW cost (MSRP) ^{USD}
LIC-CAM-1Y-CAP	Verkada 1-Year Camera License, Capacity Increase	\$249	\$249
LIC-CAM-3Y-CAP	Verkada 3-Year Camera License, Capacity Increase	\$659	\$659
LIC-CAM-5Y-CAP	Verkada 5-Year Camera License, Capacity Increase	\$1,099	\$1,099
LIC-CAM-10Y-CAP	Verkada 10-Year Camera License, Capacity Increase	\$2,199	\$2,199

Video Security software license pricing (renewal)

Model number	Description	US cost (MSRP) ^{USD}	WW cost (MSRP) ^{USD}
LIC-CAM-1Y-RNW	Verkada 1-Year Camera License, Renewal	\$249	\$249
LIC-CAM-3Y-RNW	Verkada 3-Year Camera License, Renewal	\$659	\$659
LIC-CAM-5Y-RNW	Verkada 5-Year Camera License, Renewal	\$1,099	\$1,099
LIC-CAM-10Y-RNW	Verkada 10-Year Camera License, Renewal	\$2,199	\$2,199



Accessories

Recommended accessories

Model Number	Description
ACC-CAM-USBC-4M	Verkada 13.1ft / 4.0m USB-C Cable (3.1 Speed Rated)