

CATALOG

SPRING 2026

Marshall

BROADCAST & PRO AV

(800) 800-6608 | www.marshall-usa.com | support@marshall-usa.com

TABLE OF CONTENTS

MINIATURE CAMERAS

| | |
|---------------------------------------|---|
| NETWORK CAMERAS..... | 3 |
| GLOBAL SHUTTER & GENLOCK CAMERAS..... | 4 |
| SDI/HDMI CAMERAS..... | 5 |

COMPACT CAMERAS

| | |
|---------------------------------------|------|
| NETWORK CAMERAS..... | 5, 6 |
| GLOBAL SHUTTER & GENLOCK CAMERAS..... | 6 |
| SDI/HDMI CAMERAS..... | 7 |

PTZ CAMERAS

| | |
|---------------------|-------|
| PREMIUM SERIES..... | 9 |
| ELITE SERIES..... | 9, 10 |
| ECON SERIES..... | 11 |

CAMERA ACCESSORIES

| | |
|----------------------------------|--------|
| HARDWARE & ACCESSORIES..... | 12, 13 |
| MOUNTS & SOLUTIONS..... | 13 |
| WEATHERPROOF CAMERA HOUSING..... | 14 |

MONITORS

| | |
|-------------------------------|--------|
| RACKMOUNT VIDEO MONITORS..... | 15, 16 |
| BROADCAST VIDEO MONITOR..... | 16 |
| DIGITAL AUDIO MONITORS..... | 17 |
| ANALOG AUDIO MONITOR..... | 17 |

| | |
|--------------------------------|----|
| PROCESSING & DISTRIBUTION..... | 17 |
| VIDEO CONVERTERS..... | 18 |

MINIATURE NETWORK CAMERAS

NEW PRODUCT

CV520

MINIATURE FULL HD CAMERA IP & 3GSDI

- 2.12 MP 1/2.86" FHD sensor with CV-4704.0-3MP lens
- 1920 x 1080p60 over 3G-SDI and IP simultaneously
- Streaming Protocols: RTSP, RTMP, SRT with H.264 and HEVC codecs
- VISCA over RS485, VISCA over IP and camera web GUI




CV570

MINIATURE POV CAMERA NDI® HX3 & HDMI

- 2.13 MP Sony solid-state image sensor with CV-4704.0-3MP lens
- HDMI + network support for NDI HX3, RTSP, RTMP, SRT with H.264 and HEVC
- 1920x1080p, 1080i, 720p, 60, 59.94, 50, 30, 29.97, 25, 24, 23.98fps
- One-cable Source: PoE, video, audio, control settings, POE over CAT



MINIATURE NETWORK CAMERAS

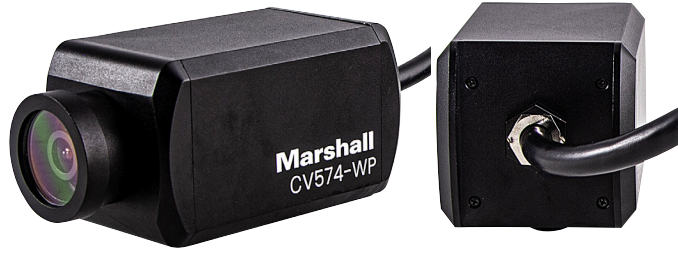

NEW PRODUCT

CV574-WP

ALL-WEATHER UHD CAMERA NDI HX3

- 8.46 MP 1/2.8" UHD sensor 3840 x 2160p60 with CV4804-8MP lens
(Note: NDI HX3 only supports 1080p50/60)
- IP67 rating for weather-proof
- Streaming Protocols: NDI HX3/HX2, RTSP, RTMP, SRT with H.264 and HEVC codecs
- VISCA over IP and camera web GUI



CV574

MINIATURE UHD CAMERA NDI® HX3 & HDMI

- 8.46 MP 1/2.8" Sony solid-state image sensor with CV4804-8MP lens
- 3840x2160p, 1080p, 1080i & 720p, 60, 59.94, 50, 30, 29.97, 25fps
- Streaming Protocols: NDI HX3, RTSP, RTMP, SRT with H.264 and HEVC
- One-cable Source: Power (PoE), Video, Audio, Remote Setting Control, and POE over CAT cable



MINIATURE GLOBAL SHUTTER & GENLOCK CAMERAS



CV566

MINIATURE GENLOCK CAMERA 3GSDI & HDMI

- 2.5 Megapixel (1/2.86") sensor (4:2:2 color)
- Tri-Level Sync (Genlock) for quick, smooth transitions
- Interchangeable M12 lens mount includes stock 4.0mm lens (85° AOV)
- HD resolutions: 1920 x 1080p, 1920 x 1080i, and 1280 x 720p
- Frame rates: 60, 59.94, 50, 30, 29.97, 25, 24, 23.98 fps
- Color Matrix function: Style, Master Level, Master Phase, Color Level and Color Phase



CV568

MINIATURE GLOBAL SHUTTER CAMERA WITH GENLOCK 3GSDI & HDMI

- 3.2 MP Large 1/1.8" Global Shutter Sensor with CV-4804.4-12MP lens
- Tri-Level Sync (Genlock) for faster, more accurate camera switching
- SMPTE 424M (2.97Gbps) - 3GSDI:
- SMPTE 292M (1.485Gbps) - HDSDI:
- Color Matrix control: Style, Master level/phase, Color level/phase



MINIATURE SDI/HDMI CAMERAS

CV504-WP

ALL-WEATHER MINIATURE CAMERA 3GSDI

- 2.2 MP Sony sensor with CV-4704.0-3MP lens
- 10-foot (3 meter) weatherproof IP67 breakout cable to BNC, RS485, power
- 3GSDI (10bit, 4:2:2, BT.709) reliability with remote adjust & match capability
- 1920x1080p, 1080i & 720p, 60, 59.94, 50, 30, 29.97, 25, 24, 23.98fp



CV504-WF-NDF
ND FILTER CAP (3-PACK)
INCLUDES ND4, ND16, ND64



CV504

MINIATURE FULL HD CAMERA 3GSDI


- 2.2 Megapixel Sony sensor with square pixel array
- Interchangeable M12 lens mount; comes with a 4.0mm - 85° Horizontal AOV
- 3GSDI (BNC) 10bit, 4:2:2, BT.709 with remote adjust & match
- 1920x1080p, 1920x1080i & 1280x720p resolutions selectable
- Frame rates: 60, 59.94, 50, 30, 29.97, 25, 24, 23.98fps
- Locking Hirose cable (included) for OSD menu joystick, RS485, AUDIO and Power



CV228

ALL-WEATHER HD LIPSTICK CAMERA

- 2.5 MP 1/2.8" sensor (4:2:2 color) with CV-4704.0-3MP lens
- 10-foot (3 meter) breakout cable with BNC (3GSDI), RS485, and locking 12V power
- IP67-rated weatherproof housing with Interchangeable M12mm lens
- 1920x1080p, 1080i and 720p, 60, 59.94, 50, 30, 29.97, 25 fps

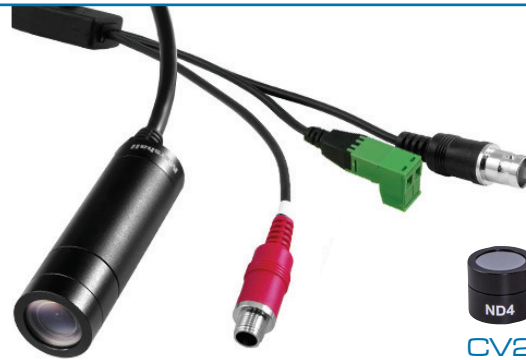

CV228-NDF
ND FILTER CAP (3-PACK)
INCLUDES ND4, ND16, ND64

CV508

MICRO POV CAMERA HDMI & 3GSDI

- 2.2 Megapixel Sony sensor with square pixel array and larger pixels
- Interchangeable M12 lens mount; comes with a 4.0mm - 85° Horizontal AOV
- 1920x1080p, 1920x1080i & 1280x720p resolutions selectable
- **Frame rates:** 60, 59.94, 50, 30, 29.97, 25, 24, 23.98fps
- Locking Hirose cable (included) for OSD menu joystick, RS485, AUDIO and power





NEW PRODUCT

CV376

COMPACT POV CAMERA NDI HX3 & HDMI

- 8.46 MP 1/2.8" UHD sensor with interchangeable lens options
- UHD 3840 x 2160p60 video over HDMI /IP network simultaneously (Note: NDI HX3 only supports 1080p50/60)
- Streaming Protocols: NDI HX3/HX2, RTSP, RTMP, SRT with H.264 and HEVC
- VISCA over IP and camera web GUI



CV374

COMPACT 4K CAMERA NDI® HX3 & HDMI

- 8.5 Megapixel 1/2.8" Sony UHD solid-state image sensor
- 3840x2160p, 1920x1080p, 1920x1080i & 1280x720p resolutions available
- Frame rates: 60, 59.94, 50, 30, 29.97, 25fps
- HDMI + network support for NDI HX3, HEVC, SRT, RTSP, MPEG-TS and other IP streaming codecs
- 1 cable to camera for power, video, audio, & remote setting control

CS/Mount Lens
Sold Separately



CV370

COMPACT POV CAMERA NDI® HX3 & HDMI

- 2.2 Megapixel Sony sensor with larger pixels and square pixel array
- HDMI + network support for NDI HX3, HEVC, SRT, RTSP, MPEG-TS and other IP streaming codecs
- One-cable to camera option for power (PoE), video, audio, & remote setting control
- 1920x1080p, 1920x1080i & 1280x720p resolutions available
- Frame rates: 60, 59.94, 50, 30, 29.97, 25, 24, 23.98fps

CS/Mount Lens
Sold Separately



NEW PRODUCT

CV320

COMPACT FULL HD CAMERA IP & 3G-SDI

- 2.12 MP 1/2.86" FHD sensor with interchangeable lens options
- FHD 1920 x 1080p60 over 3G-SDI and IP simultaneously
- Streaming protocols: RTSP, RTMP, SRT with H.264 and HEVC codecs
- VISCA over RS485, VISCA over IP and camera web GUI



COMPACT CAMERAS

CV420e

COMPACT 4K60 STREAM CAMERA IP, HDMI & USB

- Sony 1/1.8" 4K sensor with large pixel size
- 4.5mm lens with 100° H.AOV + 12X zoom
- 3840x2160p/60fps, 1080p, 1080i, and 720p, 59.94/50/29.97/25
- IR remote, CGI commands, Visca over IP, UVC and ONVIF
- Video output options of USB + HDMI or IP + HDMI
- Simultaneous Streams: HEVC + 2x H.264



CV366

COMPACT GENLOCK CAMERA 3GSDI & HDMI

- 2.5 Megapixel (1/2.8") sensor (4:2:2 color)
- Tri-Level Genlock Sync for quick & seamless transitions
- HD resolutions: 1920 x 1080p, 1920 x 1080i, and 1280 x 720p
- Frame rates: 60, 59.94, 50, 30, 29.97, 25, 24, 23.98 fps
- Color matrix function: Style, Master Level, Master Phase, Color Level, Color Phase



CS/Mount Lens Sold Separately

CV348

COMPACT POV CAMERA 3G/HD-SDI

- 2.2 MP 1/2.8" 16:9 HD color performance with interchangeable lens options
- 3GSDI (BT.709, 4.2.2, 10bit) output
- 1080p, 1080i, and 720p, 60, 59.94, 50, 30, 29.97, 25, 24, 23.98fps
- Locking Hirose Cable: Genlock, RS485 control, Audio and 12V Power



CS/Mount Lens Sold Separately

CV380-CS

COMPACT 4K30 CAMERA 6GSDI & HDMI

- 6G-SDI (single BNC) & HDMI 1.4 outputs
- 8.5 Megapixel (1/2.5") sensor (4:2:2)
- CS/C-mount for varifocal or fixed lenses
- True-4K: 4096 x 2160p @ 30, 29.97, 25, 24, 23.98 fps
- Ultra-HD: 3840 x 2160p @ 30, 29.97, 25, 24, 23.98 fps
- HD (Progressive): 1080p / 720p @ 60, 59.94, 50, 30, 29.97, 25, 24, 23.98 fps
- HD (Interlaced): 1920 x 1080i @ 60, 59.94, 50 fps



CS/Mount Lens Sold Separately



NEW PRODUCT

CV420-27X 4K60 27X BOX CAMERA IP (HEVC) & HDMI

- 8.57 MP 1/2.5" HD sensor with 27X Zoom 60° AOV
- 3840x2160p, 1080p, 720p, 59.94/50/29.97/25fps and 1080i59.94/50.
- IP Protocols: DHCP, DNS, HTTP, HTTPS, IPv4, NTP, RTSP, RTCP, RTP, TCP, UDP, RTSP, RTMP, RTMPS, MPEG-TS, SRT, and Dante Ready
- IP HEVC/SRT, 12G/HDSDI and HDMI simultaneous outputs
- Ethernet I/O supports video, control, audio and PoE over a single cable
- RS232 and 3.5mm audio input with passthrough



NEW PRODUCT

CV355-27X-ND3 FHD60 27X BOX CAMERA NDI® (NDI HX2, NDI HX3) & 3GSDI

- 8.5 Megapixel 1/2.5" FHD sensor with 27x zoom & 12X digital zoom
- HOV Wide/Tele: 68° / 3.2°
- 1080p 60/59.94/50/30/29.97/25 fps, 1080i 60/59.94/50 fps, 720p 60/59.94/50/30/29.97/25 fps
- Ethernet I/O supports video, control, and PoE over a single cable



CV355-30X-NDI HD60 25X BOX CAMERA NDI® & 3GSDI

- 8 Megapixel (1/2.5") HD sensor
- 25x Optical Zoom (4.8-120.5mm) - 68° AOV
- Up to 1920x1080 and 1280x720p
- Frame rates: 59.94/50/29.97/25fps
- NDI®HX2, 3G/HDSDI, and HDMI 2.0 simultaneous outputs
- Ethernet I/O supports video, control, and PoE over a single cable
- RS232 and 3.5mm audio input with passthrough



CV355-27X-IP 27X BOX CAMERA IP

- 8 Megapixel (1/2.5") HD sensor
- 27X Optical Zoom (5.5-150mm) - 60° AOV
- Up to 3840x2160p, 1920x1080p and 1280x720p
- Frame rates: 60/59.94/50/30/29.97/25fps
- IP formats:
 - SRT, DHCP, DNS, HTTP, HTTPS, IPv4, NTP, RTSP, RTCP, RTP, TCP, UDP
- IP (HEVC/SRT) and HDMI simultaneous outputs
- Ethernet I/O supports video, control, audio and PoE over a single cable
- RS232 and 3.5mm audio input with passthrough



ZOOM BLOCK SDI/HDMI/NDI CAMERAS

NEW PRODUCT

CV356-10X

COMPACT 10X FHD CAMERA SDI & HDMI

- 2.13 MP 1/2.8" FHD sensor
- 10x optical zoom lens with 12x digital zoom
- Ring adapter for attaching 49mm close-up lens and ND filter
- 1920 x 1080p60 video output over SDI /HDMI simultaneously.
- VISCA over RS485 control



CV355-10X

COMPACT 10X CAMERA 3GSDI & HDMI


- 2.5 megapixel (1/2.86") sensor (4:2:2 color)
- 10x optical zoom (4.7~47mm) starting at 60° H.AOV
- Resolutions: 1920x1080p, 1920x1080i & 1280x720p
- Frame rates: 60, 59.94, 50, 30, 29.97, 25, 24 & 23.98fps



PTZ CAMERAS PREMIUM SERIES

CV730-BHN/WHN 30X UHD60 NDI® PTZ CAMERA

- 9.2 million pixel UHD Sensor (1/1.8") with Sony square pixel array
- 30x Optical zoom (6.5mm~202mm) starting at 65° H.AOV
- 340° pan & 120° tilt range with select-able transition speeds
- 12GSDI, 3GSDI, HDMI2.0, NDI|HB, NDI. HX3 or IP (SRT/HEVC)
- 3840x2160p (UHD), 1920x1080p (HD), 1920x1080i & 1280x720p
- All frame rates have access to 59.94, 50, 29.97, 25fps rates
- 3.5mm TRS stereo audio over I/O cable
- Low-light performance – 0.05 lux (F1.6, 50IRE)

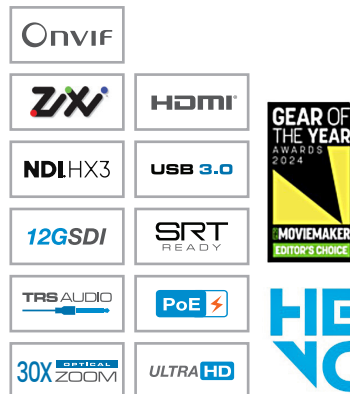

Available in white



CV730-BK/WH 30X UHD60 IP (HEVC) PTZ CAMERA

- 8.5 Megapixel UHD Sensor (1/1.8")
- 30x optical zoom (6.5mm~202mm) starting at 65° H.AOV
- 12GSDI, HDMI2.0, USB3.0 and IP (SRT/HEVC) simultaneous outputs
- 3840x2160p (UHD), 1920x1080p (HD), 1920x1080i (HD) & 1280x720p
- 59.94, 50, 29.97, 25fps options up to UHD60 and HD60
- 340° pan & 120° tilt range w/select-able transition speeds (5~300° per second)



Available in white





| | |
|------------------|---------------|
| Onvif | 3GSDI |
| 30X OPTICAL ZOOM | SRT READY |
| RS-232 CONTROL | PoE+ |
| TRS AUDIO | ZX |
| HDMI | IP H.265 HEVC |
| ULTRA HD | |

CV630-IPW 30X UHD30 IP (HEVC) PTZ CAMERA

- 8.5 Megapixel (1/2.5") UHD sensor
- 30x optical zoom (4~135mm) starting at 70° H.AOV
- 340° pan & 120° tilt range with select-able transition speeds (5~300° per second)
- 3840x2160p (UHD), 1920x1080p (HD), 1920x1080i (HD) & 1280x720p
- 59.94, 50, 29.97, 25fps options up to UHD60 and HD60
- 3.5mm TRS Stereo Audio over I/O cable (Mic/Line)



| | | |
|------------------|----------------|---------------|
| 25X OPTICAL ZOOM | AUTO TRACK | IP H.265 HEVC |
| 3GSDI | SRT READY | ULTRA HD |
| HDMI | RS-232 CONTROL | USB 3.0 |
| FreeD | Dante | |



NEW PRODUCT

CV625-TB/TW 25X UHD60 PTZ AUTO TRACKING CAMERA

- 8 MP FHD Sensor 1/1.8" – 2160p, 1080p, & 720p, and 1080i
- 25x optical zoom, with fixed M12 lens camera
- Outputs: 3G-SDI, HDMI, Ethernet, and USB outputs
- IP Protocols: RTSP, RTMP, RTMPS, SRT, Dante AV-H
- PoE+, DC: 23.5W, PoE: 24.5W

Available in white



| | | |
|------------------|------------|----------------|
| 25X OPTICAL ZOOM | AUTO TRACK | RS-232 CONTROL |
| 3GSDI | SRT READY | IP H.265 HEVC |
| HDMI | FreeD | ULTRA HD |
| FreeD | Dante | USB 3.0 |

NEW PRODUCT

CV625-TBN/TWN 25X UHD60 PTZ AUTO TRACKING CAMERA

- 8 MP FHD Sensor 1/1.8" – 2160p, 1080p, & 720p, and 1080i
- 25x optical zoom, with fixed M12 lens camera
- Outputs: 3G-SDI, HDMI, Ethernet, and USB outputs
- IP formats: VISCA / VISC over IP / ONVIF / NDI
- PoE+, DC: 23.5W, PoE: 24.5W

Available in white



| | |
|------------------|--------------------|
| 20X OPTICAL ZOOM | 3GSDI |
| HDMI | PoE+ |
| FreeD | IP H.264 STREAMING |
| SRT READY | RS-232 CONTROL |
| USB 3.0 | Onvif |

CV620-B12/W12 25X UHD60 IP (HEVC) PTZ CAMERA


- 2 MP Sony 1/2.8" FHD Sensor
- 20x Optical zoom starting at 60° H.AOV
- 3GSDI, HDMI, USB, and IP H.264 available outputs
- IP formats: HTTP, RTSP, RTMP, RTP, TCP, UDP, SRT, MPEG-TS, ONVIF, Multicast, RTMPS
- Full-HD: 1920x1080p, and 1280x720p 60, 50, 30, 25
- Free-D and CGI protocol commands
- 12VDC: 9W, PoE: 9W

PTZ CAMERAS ELITE SERIES

CV612-TBI / CV612-TWI 12X AI AUTO TRACK & FRAMING PTZ CAMERA

- 12x optical zoom 2.07 MP 1/2.8" FHD sensor CMOS
- Format Resolutions 1920x1080, 1280x720, 640x480
- Video outputs include: 3GSDI, HDMI, USB3.0 and IP
- Real time tracking and regional tracking up to 8m
- Dante Ready AV-H: 1080p and 2 audio channels
- 12VDC: 13.5W, PoE+:14W

Dante Ready™

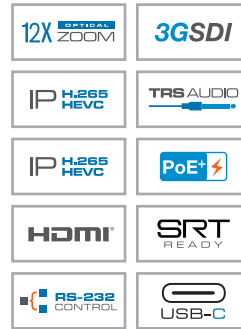


Available in black



PTZ CAMERAS ECON SERIES

CV605-WH 5X HD60 3GSDI & IP PTZ CAMERA

- 2 Megapixel (1/3") HD sensor
- 5x optical zoom (3mm-15mm) starting at 85° H.AOV
- 3GSDI & IP (HEVC/H.265/H.264) simultaneous outputs
- 1920x1080p (HD), 1920x1080i (HD) & 1280x720p
- 59.94, 50, 29.97, 25fps options up to HD60

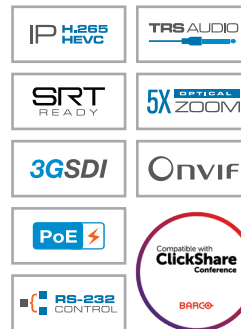

CAMERA HARDWARE & ACCESSORIES



RCP-PLUS

MULTI-CAMERA TOUCHSCREEN CONTROLLER

VISCA OVER IP to support Marshall box cameras such as:
CV420E/NE, CV355-30X, CV420-30X, CV370/374 & CV570/574 SERIES

- Large 5-inch TFT LCD touchscreen (800x480) with fine-tune adjustment knobs
- Supports up to 7 cameras via VISCA RS485 & up to 100 cameras using both VISCA RS485 & VISCA over IP combined
- Directly adjust & match up to 7 different cameras from the convenience of control truck or control booth
- Common 3-pin XLR cable connection allows for cable-runs at distances of up to 300 meters (1,000 ft)
- Adjustments made on camera without OSD Menu appearing on video stream
- Top rack mount bracket for mounting onto CCU control boards for remote adjust
- Easily convert to fiber using common fiber media converters for much longer distances
- 7 cameras are selectable from ALL screen menus with intuitive navigation layout
- Global or individual camera adjustment capability without On Screen Display Menu appearing on video stream



CVM-26



Camera not included.

HOUSING WITH SUN HOOD FOR COMPACT & MINIATURE CAMERAS

COMPATIBLE CAMERAS:

CV504, CV504-WP, CV508, CV566, CV568, CV574, CV570, CV346, CV348, CV366, CV368, CV370, CV374, CV380-CS

- All metal construction
- Max Camera Weight, 5 lbs
- Rugged camera housing for maximum protection
- 3-position placement sun hood
- 4 Rubber shock mount gaskets and removable mounting plate
- 1/4" Mounting thread on bottom base

RS7-HR

RS232 / RS422 HOME RUN (1-7) EXTENDER



Rack Mount Kit Included



- Splits one Cat (RJ45) control cable to 7 cameras via Home Run.
- Easy & clean setup from Marshall Controllers \ (VS-PTC-IP, VS-PTC-200) & others.
- Extends usable RS232 Cat cable runs for control of cameras to
- 100m from controller to RS7-HR box & another 100m to each of 7 camera locations (200m total).
- Easy access dip switches to switch between RS232 & RS422.



HD/UHD/4K MP VARIFOCAI LENSES MEGAPIXEL CS MOUNT LENSES (MANUAL & AUTO IRIS)

HD/UHD/4K MP Varifocal Lenses are designed to deliver clear, crisp images with high optical MTF performance. High accuracy aspherical lens elements, low-dispersion, and high refractive index glass best suited for high performing color 1/3-1/2" HD sensors.



VS-PTC-300

PTZ CAMERA IP/ NDI® CONTROLLER

- Simultaneously Control: IP, NDI, RS232/RS422 or IP, USB, RS232/RS422
- Protocol support: VISCA, PELCO D/P, ONVIF, NDI, and VISCA over IP
- Automatic search IP/NDI cameras while assigning IP addresses easily
- RTSP and NDI Preview on 3" LCD Screen
- Quick control of exposure, shutter speed, iris, compensation, white balance, focus, pan/tilt speed, zoom speed



VS-PTC-200

COMPACT PTZ CAMERA CONTROLLER

- Joystick (4D) allows simultaneous control over Pan, Tilt, Zoom & Focus
- 128 Preset locations with smooth adjustable transition speeds
- One-touch control over Brightness, Back Light, Mirror/Flip, Freeze Capture
- Full Duplex RS-232 & RS-422 Communication Interface
- VISCA or PELCO setup available via RS422/RS232
- Suitable for [Marshall CV605](#), [CV610](#), [CV612](#), [CV620](#), [CV630](#)
- Compact Design - Dims 7.87"(L) x 4.72"(W) x 4.06"



CVM-25 COMPACT LIGHT WEIGHT 58" FLOOR TRI-POD

- Fully extended reaches 58"
- Maximum Load = 3 kilograms
- 3 level leg adjustments and non-slip swivel feet for maximum stability.
- Desktop measurement 18.5"
- Zipper bag (included)
- 2 bubble level indicator



CV-BATT-PAC PORTABLE CAMERA POWER KIT

- Rugged, all-metal construction
- Supplies up to 3 hours of power under most operating conditions
- Allows for instant battery swaps in the field
- Designed for use with all standard tripods and mounting equipment
- Includes 7.2V Canon battery and battery charger
- Suitable for use with all Marshall Mini and Compact HD Cameras



CVM-18 CLAMP WITH ADJUSTABLE CAMERA MOUNT

Adjustable clamp (3" max pole width) with removable swivel ball mount (1/4"-20) for mounting Marshall miniature and compact cameras on trusses, railings, and poles.

- Max Length: 4.5"
- Max Load Weight of Ball Mount: Up to 6 lbs.



CVM-14 TABLE-TOP TRIPOD STAND

Adjustable, sturdy tripod mount designed for POV cameras with swivel head & adjustable height (1/4"-20). Enables you to get precise viewing angles even under the toughest conditions.



CVM-19 1/4"-20 WALL MOUNT PLATE WITH SCREWS

Wall mount plate with 4 mounting screws is designed to be used with any Marshall 1/4"-20 articulating arms (CVM-7 & CVM-11), Gooseneck (CVM-13), Flexible Arm (CVM-4), or any 1/4"-20 male to male mount solution.

Camera not included.



CV6XX-DH OUTDOOR DOME HOUSING

- Secure weatherproof housing for [CV630 and CV620 Series PTZ Cameras](#)
- IK10 vandal-proof compliance enclosure
- Die-cast aluminum compliance enclosure
- 9" dome housing with 118mm transparent cover.
- Wall mount arm 360° Swivel - 90° tilttable
- Built in heater and blower
- Compatible cameras: [CV630-NDI CV630-NDIW CV630-IP CV630-IPW CV620-BI CV620-WI CV620-TBI CV620-TWI](#)
- Fits camera size (mm): 174(W) x 185.5 (H) x 186.5mm (L)
- Seamlessly connects with weatherproof [CV-H20-PWR](#) power supply 110v, 240v switchable



CV-H20-PWR

OPTIONAL WEATHER PROOF
POWER SUPPLY



CV-H20-PWR

OPTIONAL ARM FOR WALL MOUNTING to be
used without [CV-H20-PWR](#)



Power Supply Not Included.

CV-H20-HF COMPACT WEATHERPROOF CAMERA HOUSING WITH FAN & HEATER

- Built-in heater, fan, and attachable sun hood
- Suitable for any of the Marshall compact cameras, [part#:](#) [CV420-30X-IP, CV420-30X-NDI, CV355-30X-IP, CV355-30X-NDI, CV355-10X, CV344, CV346, CV366, CV368](#)
- Top open access for easy installation & service
- Fits camera Size (mm): 108 (W) x 75 (H) x 180 (L)
- Overall housing size (mm): 157 (W) x 130 (H) x 340 (L)



Power supply
not included.

CV-H20-HFL COMPACT WEATHERPROOF EXTENDED CAMERA HOUSING WITH FAN & HEATER

- Suitable for any of the Marshall Compact Cameras [part# CV420-CS, CV420-18X and CV420-30X](#)
- Top open access for easy installation & service
- Fits camera size (mm): 89 (W) x 85 (H) x 300 (L)
- Overall housing size (mm): 157 (W) x 130 (H) x 460 (L)
- Wall mount arm 360° Swivel - 90° tilttable

RACKMOUNT VIDEO MONITORS

V-702W-12G-V2

DUAL 7" 12G RACKMOUNT MONITOR 12G-SDI & HDMI INPUTS



- 12G SDI input low latency, eliminates external downconverter
- Remote controllable via Ethernet. PCSet Control App available
- Inputs allow looping outputs for flexible system design
- Waveform, Vector, Histogram, HDR, S-LUT, on-screen tally and User LUT's
- Timecode Display (VITC & LTC modes)

V-702W DUAL 7" RACKMOUNT MONITOR 3G-SDI HDMI & CVBS INPUTS



- SDI, HDMI inputs with active loop through
- Focus peaking, markers, image flip
- Audio bars, front panel headphone jacks
- On-screen tally borders. GPI activation
- Only 2RU tall (3.5")

ML702-V2 DUAL 7" RACKMOUNT 3RU MONITOR 3G-SDI HDMI & COMPOSITE



- Dual full HD screens
- Adjustable back light compensates for different viewing environments
- Angle of viewing allows the user to position the rack in any number of physical locations


ML-503 TRIPLE 5" RACKMOUNT MONITOR 3G-SDI & HDMI



- SDI, HDMI inputs with active loop through
- Focus peaking, framing markers, image flip
- Audio bars, front panel headphone jacks
- Ethernet control
- On-screen tally borders, GPI or network activated


ML-454-V3

QUAD 4.5" RACKMOUNT MONITOR HDMI & 3G-SDI

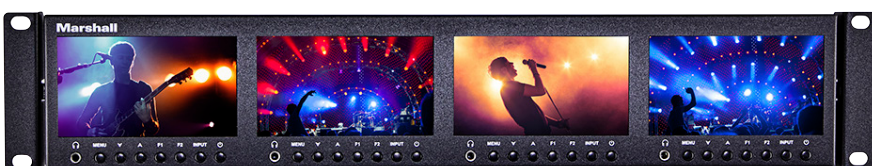

- 3G SDI HD 1920 x 1080 colorful display with individual input selections
- Digital inputs: HDMI, 3GSDI with On-screen 3-col
- Multi-screens in 2RU with SDI active loop through outputs
- Inputs allow looping outputs for flexible system design

RACKMOUNT VIDEO MONITORS

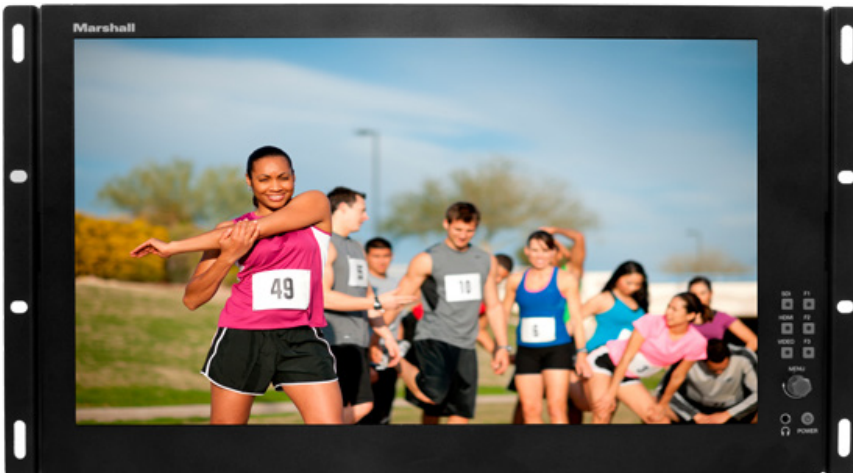

V-LCD173HR

17.3" PROFESSIONAL LCD RACK MOUNT / DESKTOP MONITOR

- Rec 709 compliant
- LED Tally lights
- HDMI/SDI inputs and outputs with conversion ability and two-channel audio
- Production Adjustment: Markers, Brightness, Contrast, Aspect Ratio, Peaking, False Color, Exposure, Histogram, and more
- Optional Rack ears or VESA mount options with BNC connectors and Image flip ability



V-MD173

17" FULL RESOLUTION RACK MOUNT / STANDALONE MONITOR MODULAR INPUTS

- 6RU
- Status Display
- False Color Filter
- LED Tally Lights
- Freeze Function
- Color Temperature Presets
- RGB Gain / Bias Adjust
- User-definable function buttons
- Composite and Component loop-through
- User-changeable input modules

DIGITAL AUDIO MONITORS



AR-DM61-BT-64DT

MULTICHANNEL DIGITAL AUDIO MONITOR DANTE / AES67

- 10-inch LCD intuitive touchscreen panel displays up to 64 channels vertical, or switch to 96-step high precision horizontal bars
- Special LKFS bars provides weighted display for group of channels
- Built-in live video preview monitor
- Accepts multiple signal types including: Dante, MADI, 3G SDI, AES3, balanced analog Dolby decoding from any encoded pair

3GSDI

Dante

DOLBY

SUPER LOUD

- High-powered stereo speakers (up to 100 dB output)
- Dedicated push-to-mute button
- Slim 1 RU design
- Built-in web server makes it convenient to setup and customize
- Software upgradeable "future-proof" platform

AR-DM61-BT


SAME FEATURES AS THE ABOVE MONITOR WITHOUT DANTE MODULE

ANALOG AUDIO MONITOR

AR-AM4-BG2

ANALOG AUDIO MONITOR

12V DC power supply included.

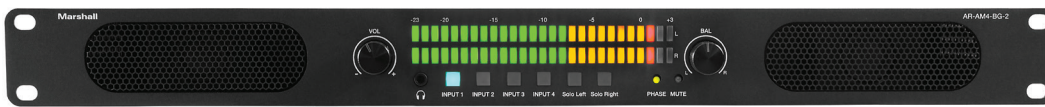

- 4 analog balanced XLR stereo inputs
- 2 analog balanced XLR outputs
- 2 powerful speakers
- LED VU display shows audio input activity
- Remote control via RS-232
- Headphone jack
- Press volume knob for instant mute
- 1 RU design

PROCESSING AND DISTRIBUTION

VMV-402-3GSH

SEAMLESS 4X SWITCH WITH QUADVIEW MODE & ETHERNET CONTROL



- 4x 3GSDI inputs, inputs 1 & 2 support HDMI Quadview
- UP and DOWN resolution/frame rate scaling
- Waveform overlay selectable
- Fixer/Converter - Accepts mixed or selected output formats
- Dual Program output - SDI feed 100 meters with HDMI local monitoring

VSW-2000

4X1 3G-SDI VIDEO SWITCH

- Rapidly routes any of four 3G-SDI inputs to single 3G-SDI output
- Output is re-clocked and cable equalized
- No insertion delay. Inputs are passed directly to the output and are not scaled or converted
- Compact size takes minimum desk or shelf space



AC power supply included

- Can be run from USB sources using USB to 5.5mm adapter cable (available from multiple sources)
- Power: 5-volt @ 250 milliamps fully loaded (can run all day on 10,000 mAh phone charger battery)

VDA-104-3GS-2

1X4 3G-SDI DISTRIBUTION AMPLIFIER

- Supports 270Mb/s, 1.485Gb/s, and 2.97Gb/s data rates
- Supported video formats:
 - SD: 480i/59.94 "NTSC", 576i/50 "PAL"
 - HD: 720p24, 25, 30, 50, 59.94, and
- 60 1080i50, 59.94, and 60 1080p24, 25, and 30
- Supports Level A and B
- 2K: 2048x1080p24 and 30

- Passes all ancillary data
- Reclocking function reshapes the signal to improve transmission distance
- Video format LED indication



VDA-108-3GS

1 X 8 3G/HD/SD-SDI RECLOCKING DISTRIBUTION AMPLIFIER

- 3G/HD/SD serial digital distribution
- 8 separately buffered & reclocked outputs
- Dual color LED indication of input lock and and rate
- Supported video formats:





VAC-23SHUC HDMI / SDI TO USB-C (3.0) CONVERTER

- The 3G SDI input accepts SD/HD formats up to 1080p50/60
- The HDMI input accepts SD/HD up to 1080p50/60 and 4K up to 4096x2160@30fps
- USB-C output video format is controlled by the application running on the PC.
- Outputs up to 3840x2160@30fps are possible.
- Output audio sampling rate defaults to 48KHz
- Stereo audio input via 3.5mm jack
- Backwards compatible to USB 2.0 (limited to 1280x720p30 max)
- Supported operating systems: Windows 10, 11, & Mac OS
- Plug + Play operation



VAC-12HUC HDMI TO USB-C (3.0) CONVERTER

- The HDMI input accepts SD/HD up to 1080p50/60 and 4K up to 4096x2160@30fps
- USB-C output video format is controlled by the particular application running on the PC
- Outputs up to 3840x2160@30fps are possible
- Output audio sampling rate defaults to 48KHz
- Stereo audio input via 3.5mm jack
- Backwards compatible to USB 2.0 (limited to 1280x720p30 max)



VAC-12SH

3G/HD/SD SDI TO HDMI CONVERTER WITH LOOP OUT

Supported formats:

NTSC 525@59.94, PAL 625@50, 720p@50, 720p@59.94, 720p@60, 1080i@50, 1080i@59.94, 1080i@60, 1080p/pSF@23.98, 1080p/pSF24, 1080p@25, 1080p@29.97, 1080p@30, 1080p@50, 1080p@59.94, 1080p@60

- Bit Rate: 2.97 Gbps, 2.967 Gbps, 1.485 Gbps, 1.4835 Gbps, 270 Mbps
- Auto 3G-SDI/HD-SDI detection
- Supports HDMI Deep Color
- One SDI compliant output & one HDMI

MARSHALL BROADCAST / AV REGIONAL SALES SUPPORT

<https://marshall-usa.com/company/sales-reps.php>

Robert Ramos

CA, OR, WA, NV, ID, UT, AZ, MT, WY, CO, NM, HI, AK
West Coast Regional Sales Manager
Robert@Marshall-USA.com
800-800-6608 Ext. 1151
310-333-0606 Ext. 1151

David Hubble

NE, KS, OK, TX, MO, AR, LA
Mid-West Regional Sales Manager
david.hubble@marshall-usa.com
800-800-6608 Ext. 1393
310-333-0606 Ext. 1393

Bernie Keach

NY, International Sales
Broadcast AV Consultant
bernie.keach@marshall-usa.com
800-800-6608 Ext. 1165
310-333-0606 Ext. 1165

Dan Walsh

ND, SD, MN, WI, IL, IA, MI, IN, OH, KY,
Mid-West / Canada Regional Sales Manager
Dan.Walsh@Marshall-USA.com
800-800-6608 Ext. 1390
310-333-0606 Ext. 1390

John Wheeler

MS, TN, AL, GA, FL, SC, NC
Southeast Regional Sales Manager
john.wheeler@marshall-usa.com
800-800-6608 Ext. 1167
310-333-0606 Ext. 1167

Joanna Lovell

DE, DC, MD, PA, VA, WV, NH, VT, MA, ME, RI, CT, NJ
Mid-Atlantic States Sales Manager
joanna.lovell@marshall-usa.com
800-800-6608 Ext. 1391
310-333-0606 Ext. 1391



Marshall

BROADCAST & PRO AV

(800) 800-6608 | www.marshall-usa.com | support@marshall-usa.com