VX52 Viewing Station

Configurable live viewing experience built for any organization

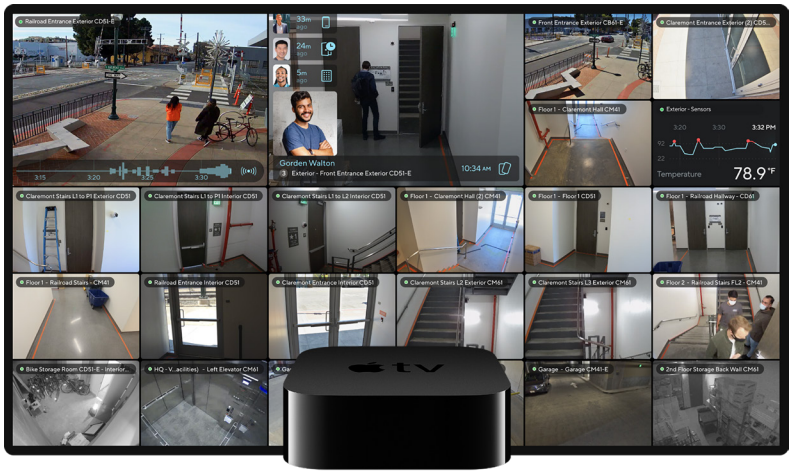

Overview

The VX52 is a dedicated device that streams up to 300 camera feeds (30 cameras per page, up to 10 pages) to any display with ultra-low latency, crisp video playback, and customizable layouts. Built on the powerful Apple TV 4K platform, the VX52 is the viewing platform of choice for customers with mission-critical real-time viewing requirements.

Plug-and-play by design
Simply connect the device to your network via ethernet or WiFi and project to a display. The VX52 can be provisioned, configured, and ready to stream in minutes.

Easy to configure and manage
System administrators can remotely configure and manage the VX52 from within Command. Operators using the VX52 for real-time monitoring do not need accounts and cannot modify display settings.

Stable and resilient
Streams play continuously without interruption. There is no need to reset the device or relaunch a browser or application — local streams continue during an internet outage and all streams restart automatically after a power outage.

Seamlessly integrated
Pair the VX52 with intercoms, access controlled doors, and air quality sensors within your organization to answer incoming calls, monitor entryways, and view environmental conditions in real time.

Key features

- Stream up to 300 cameras across 10 pages on a single display
- Ultra-low latency with crisp video playback
- Easy to configure and manage using administrator accounts
- Device comes online and configures in minutes
- Customize layout and smart tiles from within Command
- 10-year warranty and best-in-class technical support

Smart tiles

Customize your video wall using smart tiles to prioritize camera feeds with high motion activity, view live door events, display air quality sensor data, and blur faces in real time.

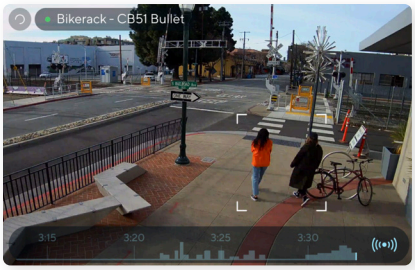

Active area

The active area smart tile will dynamically switch to the camera that has the most motion detected within its field of view. Security teams can use this smart tile to see where activity is taking place across a facility without having to scan multiple camera feeds. The graph at the bottom of the tile shows historical motion activity on the camera currently being displayed.

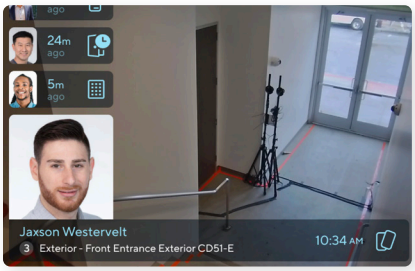

Access control

The access control smart tile can be overlaid on top of any live camera feed and displays door events in real time. Users can choose to display all door events or filter for specific types of events including access denied, door held open, door forced open, and tailgating. Security teams can use this smart tile to visually verify entryway activity and identify suspicious or unwanted behavior.

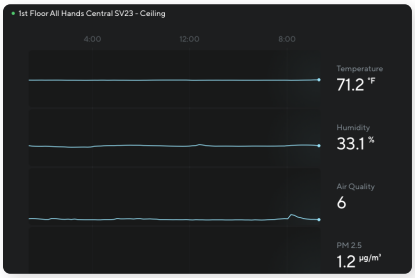

Sensor readings

The sensor readings smart tile displays air quality readings from a specific sensor within an organization. Users can customize which readings are displayed on the tile within Command. Security teams can leverage this smart tile to monitor environmental conditions across a facility in real time.

Live face blur

The live face blur smart tile will display a live camera feed with faces automatically blurred in real time. Security teams can use this smart tile for live monitoring while protecting individual privacy.

VX52
Tech specs

Viewing station features

Supported displays	One display per station	**Number of streams**	Up to 300 cameras (local and remote); 30 per page
Supported resolution	Up to 4096 x 2160 resolution	**CPU**	A12 Bionic chip with 64-bit architecture

Power and network

Connectivity	RJ-45 cable connector for network/PoE connection; 10 / 100 / 1000 Mbps	**Wi-Fi connectivity**	802.11ax WiFi 6 with MIMO
Ports	HDMI 2.1 port, gigabit ethernet		

General

Operating temperature	0°C to 35°C / 32°F to 95°F	**Humidity**	0 to 95%
Storage temperature	-20°C to 45°C / -4°F to 113°F	**Warranty**	10 years
Operating altitude	Up to 3000m / 10000ft	**Included accessories**	HDMI cord, setup guide, power cord, Apple TV remote

Mechanical

Weight	425g / 15.00oz	**Body**	Recycled aluminum and plastic
Dimensions	H: 35.6mm / 1.40in L: 99.1mm / 3.90in W: 99.1mm / 3.90in		

Ordering information

Viewing station pricing

Model number	Description	Cost (MSRP) USD
VX52-HW	VX52 Viewing Station	$499

Viewing station license pricing (new/capacity increase)

Model number	Description	Cost (MSRP) USD
LIC-VX-1Y-CAP	1-Year Viewing Station License, Capacity Increase	$499
LIC-VX-3Y-CAP	3-Year Viewing Station License, Capacity Increase	$1,299
LIC-VX-5Y-CAP	5-Year Viewing Station License, Capacity Increase	$1,999
LIC-VX-10Y-CAP	10-Year Viewing Station License, Capacity Increase	$3,999

Viewing station license pricing (renewal)

Model number	Description	Cost (MSRP) USD
LIC-VX-1Y-RNW	1-Year Viewing Station License, Renewal	$499
LIC-VX-3Y-RNW	3-Year Viewing Station License, Renewal	$1,299
LIC-VX-5Y-RNW	5-Year Viewing Station License, Renewal	$1,999
LIC-VX-10Y-RNW	10-Year Viewing Station License, Renewal	$3,999