


## ACC-CAM-CB-IR-1

### IR Illuminator for 4K Bullet Camera

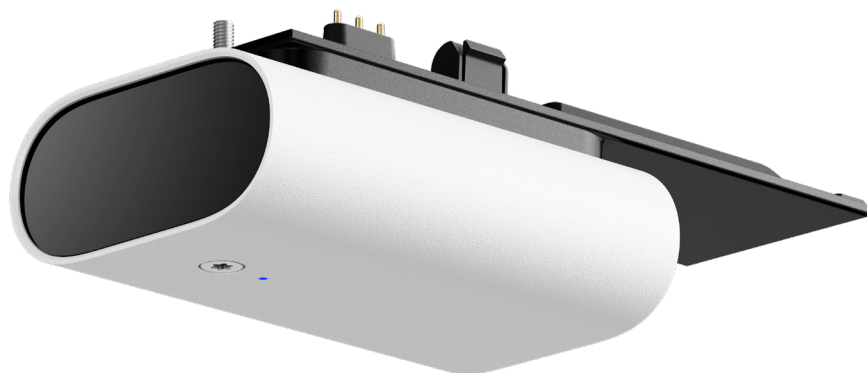

## Overview

The ACC-CAM-CB-IR-1 is an external infrared (IR) illuminator that can be attached to the CB63-E and CB63-TE bullet cameras and managed within Command. At maximum intensity, this device extends the IR range of the CB63-E bullet camera from 50m / 164ft to 75m / 246ft, and the IR range of the CB63-TE telephoto bullet camera from 100m / 328ft to 150m / 492ft. This additional range allows the bullet camera to capture detail at longer distances in low-light conditions, optimizing nighttime performance when the camera is optically zoomed in.

The ACC-CAM-CB-IR-1 connects to the underside of the CB63-E and CB63-TE models using the built-in attachment interface. The illuminator is powered by the camera itself, which must receive PoE++ (IEEE 802.3bt Type 3) for the attachment to function.



ACC-CAM-CB-IR-1

Tech specs



General

|                      |                                                                  |            |                |
|----------------------|------------------------------------------------------------------|------------|----------------|
| IR range             | 75m / 246ft with CB63-E<br>150m / 492ft with CB63-TE             | Warranty   | 10 years       |
| Box dimensions       | L: 220.0mm / 8.66in<br>W: 114.0mm / 4.49in<br>H: 61.0mm / 2.40in | Box weight | 600g / 21.16oz |
| Included accessories | T25 security Torx L-key                                          |            |                |

Mechanical

|            |                                                                 |          |          |
|------------|-----------------------------------------------------------------|----------|----------|
| Weight     | 440g / 15.52oz                                                  | Material | Aluminum |
| Dimensions | L: 180.0mm / 7.09in<br>W: 71.0mm / 2.80in<br>H: 50.0mm / 1.97in |          |          |

Dimensions



Power

|             |                                                             |                   |                                                                                                                                                                                                           |
|-------------|-------------------------------------------------------------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power input | IEEE 802.3bt Type 3 PoE++<br>(powered by CB63-E or CB63-TE) | Power consumption | Attachment (including camera): 43-57V,<br>1.07-0.81A, 45.9W<br>Attachment (excluding camera): 43-57V,<br>0.81-0.61A, 34.8W<br>Extended temperature range<br>(including camera): 43-57V, 1.14-0.86A, 49.0W |
|-------------|-------------------------------------------------------------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



# Ordering information

## ACC-CAM-CB-IR-1 pricing

| Model number    | Description                                   | US cost (MSRP) <sup>USD</sup> | WW cost(MSRP) <sup>USD</sup> |
|-----------------|-----------------------------------------------|-------------------------------|------------------------------|
| ACC-CAM-CB-IR-1 | IR illuminator for bullet camera <sup>1</sup> | \$349                         | \$349                        |

1. The ACC-CAM-CB-IR-1 is only compatible with the CB63-E and CB63-TE.