


ACC-CAM-CB-WL-1

White Light Illuminator For 4K Bullet Camera

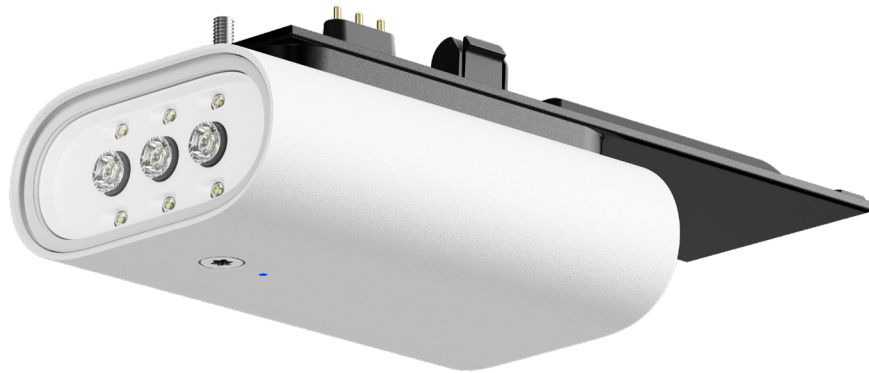

Overview

The ACC-CAM-CB-WL-1 is an external white light illuminator that can be attached to the CB63-E and CB63-TE bullet cameras and managed within Command. This device can be used to capture full-color video at night and in low-light environments, or to deter potential threats. Two light modes are supported: floodlight, which continuously illuminates the area in front of the camera, and pulse, which repeatedly flashes on and off. The device can be configured to trigger anytime motion is detected or set to stay on continuously, with the ability to create custom schedules.

The ACC-CAM-CB-WL-1 connects to the underside of the CB63-E and CB63-TE models using the built-in attachment interface. The illuminator is powered by the camera itself, which must receive PoE++ (IEEE 802.3bt Type 3) for the attachment to function.



ACC-CAM-CB-WL-1

Tech specs



General

Box dimensions	L: 220.0mm / 8.66in W: 114.0mm / 4.49in H: 61.0mm / 2.40in	Warranty	10 years
Included accessories	T25 security Torx L-key	Box weight	600g / 21.16oz

Mechanical

Weight	440g / 15.52oz	Material	Aluminum
Dimensions	L: 180.0mm / 7.09in W: 71.0mm / 2.80in H: 50.0mm / 1.97in		

Dimensions

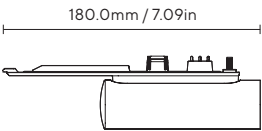

Power

Power input	IEEE 802.3bt Type 3 PoE++ (powered by CB63-E or CB63-TE)	Power consumption	Attachment (including camera): 43-57V, 1.02-0.77A, 43.8W Attachment (excluding camera): 43-57V, 0.77-0.58A, 32.9W Extended temperature range (including camera): 43-57V, 1.09-0.82A, 47.0W
-------------	---	-------------------	---



Ordering information

ACC-CAM-CB-WL-1 pricing

Model number	Description	US cost (MSRP) ^{USD}	WW cost(MSRP) ^{USD}
ACC-CAM-CB-WL-1	White light illuminator for bullet camera ¹	\$349	\$349

1. The ACC-CAM-CB-WL-1 is only compatible with the CB63-E and CB63-TE.