

Improving Diffusion Models for Scene Text Editing with Dual Encoders

Jiabao Ji^{1*}, Guanhua Zhang^{1*}, Zhaowen Wang², Bairu Hou¹, Zhifei Zhang², Brian Price², Shiyu Chang¹

¹UC Santa Barbara, ²Adobe Research

{jiabaoji, guanhua, bairu, chang87}@ucsb.edu, {zhawang, zzhang, bprice}@adobe.com

Abstract

Scene text editing is a challenging task that involves modifying or inserting specified texts in an image while maintaining its natural and realistic appearance. Most previous approaches to this task rely on style-transfer models that crop out text regions and feed them into image transfer models, such as GANs. However, these methods are limited in their ability to change text style and are unable to insert texts into images. Recent advances in diffusion models have shown promise in overcoming these limitations with text-conditional image editing. However, our empirical analysis reveals that state-of-the-art diffusion models struggle with rendering correct text and controlling text style. To address these problems, we propose DIFFSTE to improve pre-trained diffusion models with a dual encoder design, which includes a character encoder for better text legibility and an instruction encoder for better style control. An instruction tuning framework is introduced to train our model to learn the mapping from the text instruction to the corresponding image with either the specified style or the style of the surrounding texts in the background. Such a training method further brings our method the zero-shot generalization ability to the following three scenarios: generating text with unseen font variation, e.g., italic and bold, mixing different fonts to construct a new font, and using more relaxed forms of natural language as the instructions to guide the generation task. We evaluate our approach on five datasets and demonstrate its superior performance in terms of text correctness, image naturalness, and style controllability. Our code is publicly available.¹

1. Introduction

Scene text editing has gained significant attention in recent years due to its practical applications in various fields, including text image synthesis [21, 33, 55], styled text transfer [2, 3, 58], and augmented reality translation [7, 10, 12].

*Equal contribution.

¹<https://github.com/UCSB-NLP-Chang/DiffSTE>



Figure 1: Text editing results by GAN-based MOSTEL, diffusion model SD, and our method DIFFSTE. A reference RENDERED image with desired content and style is fed to MOSTEL as style guidance. SD and our method are prompted by instruction *Write a grass-colored word “DiffSTE” in BadScript font*.

The task involves modifying or inserting specified text in an image while maintaining its natural and realistic appearance [19, 42, 49]. Most previous approaches have formulated the problem as a style transfer task using generative models such as GANs [25, 32, 34, 38, 49, 53]. Specifically, these methods rely on a reference image with the target style, *e.g.*, cropped out text region that needs to be modified. The method then transfers a rendered text in the desired spelling to match the style and the background of the reference. However, these methods are limited in their ability to generate text in arbitrary styles (*e.g.*, font and color) or at arbitrary locations. Additionally, the process of cropping, transferring style, and then replacing back often leads to less natural-looking results. Figure 1.(c) illustrates an image generated by MOSTEL [34], a state-of-the-art GAN-based scene text editing model. Upon observation, the edited part of the image exhibits discordance with the surrounding areas with distinct boundaries and messy distortions.

On the other hand, recent advances in diffusion models have shown promise for overcoming these limitations and creating photo-realistic images [4, 17, 40, 45]. Furthermore, by incorporating a text encoder, diffusion models can be adapted to generate natural images following text instructions, making them well-suited for the task of image editing [36, 37]. Despite the remarkable success of diffusion models in general image editing, our empirical study reveals that they still struggle with generating accurate texts with specified styles for scene text editing. For instance, Figure 1.(d) shows an example of the text generated by stable-diffusion-inpainting (SD) [37], a state-



Figure 2: Generating text in new style by blending two existing fonts. The first row shows the texts rendered with real fonts, and the second row shows our generation results with instructions *Write “Greetings” in font: FONT*, where FONT is *PressStart2P*, *MoonDance* and *PressStart2P and MoonDance*, respectively.

of-the-art text-conditional inpainting model. We feed the model with the masked image and a text instruction, requiring the model to complete the masked region. Although the resulting image shows better naturalness, neither the spelling of the generated text is correct nor the specified style is well followed by the model.

Motivated by this, in this paper, we aim to improve the pre-trained diffusion models, especially SD, in their scene text editing ability. In particular, we identify two main issues as the cause of the diffusion model’s failure: ① although the target text is fed as a part of the input to the text encoder of SD, it cannot encode the character-level information of the target text, making it challenging to accurately map the spelling to appropriate visual appearance; ② the models are unable to understand the language instructions for a style-specified generation, which leads to the incorrect font or color generation. To address these challenges, we propose a novel model for scene text editing called DIFFSTE, which incorporates a dual encoder design comprising of an instruction encoder and a character encoder. Specifically, DIFFSTE is built upon SD, and the instruction encoder is inherited from the original SD’s text encoder. The input to this encoder describes the target text and its desired style, which is then utilized in cross-attention to guide the generation process. On the other hand, the character encoder is an add-on module that only takes the target text tokenized at the character level. The encoded character embeddings are then attended by the image encodings and further aggregated together with the attended result from the instruction encoder side. Having direct access to the characters equips the model with the capability of explicit spelling checks and the awareness of target text length.

To make both encoders understand the scene text editing task, we further introduce an instruction-tuning framework for training our model. Instruction tuning is a popular technique in the natural language processing (NLP) domain [16, 28, 41, 47, 18, 46, 52, 59, 60]. It aims to teach foundation language models to perform specific *tasks* based on the corresponding *task instructions*. By doing so, models can achieve better performance on both training and unseen tasks with appropriate instructions [1, 8, 14, 20, 29, 6].

Similarly, our goal is to teach DIFFSTE to capture the mapping from the text instruction to scene text generation. To achieve this, we create a synthetic training dataset, where each training example includes three components: ① a text instruction that describes the desired target text, ② a masked region surrounded by other scene texts in a similar style indicating the location in the image where the text should be generated, and ③ a ground truth reference image. The text instructions are generated using a fixed natural language rule that can be grouped into four main categories: specifying both color and font, specifying color only, specifying font only, and providing no style specification. If a text instruction is missing either color or font information or both, the scene text in the surrounding area of the image can be used to infer the missing information.

Our model is trained to generate the ground-truth scene text by minimizing a mean square error (MSE) loss conditioned on the provided instructions and the unmasked image region using both synthetic and real-world datasets. This enables our model to achieve both spelling accuracy and good style control. An example of the generated image can be found in Figure 1.(e). Even more surprisingly, our model performs well on test instructions that were significantly different from the ones used for training, demonstrating its zero-shot generalization ability. Specifically, our model generalizes well to the following three scenarios: generating text with unseen font variation, *e.g.*, italic and bold, mixing different fonts to construct a new font, and using more relaxed forms of natural language as the instructions to guide the generation task. Figure 2 showcases the new font style created by DIFFSTE, which mixes the fonts *PressStart2P* and *MoonDance*.

We compared our approach with state-of-the-art baselines on five datasets, considering both style-free and style-conditional text editing scenarios. Our method showed superior performance in terms of text correctness, image naturalness, and style control ability, as evaluated quantitatively and subjectively. For instance, under the style-free text editing setting, DIFFSTE achieves an average improvement of 64.0% on OCR accuracy compared to the most competitive baseline. Additionally, our approach maintained high image naturalness, as demonstrated by 28.0% more preference over other baseline methods in human evaluations. In the style-conditional scenario, our method shows 69.2% and 26.8% more preference compared to other diffusion baselines in terms of font correctness and color correctness, with consistent improvements in both text correctness and naturalness as observed in the style-free case.

2. Related Work

Scene text editing GAN-based style transfer methods have been widely used for the task of scene text editing [19, 23, 25, 38, 43, 53, 56]. These works accomplish the

task by transferring the text style in a reference image to the rendered target text image. STEFANN [38] edits scene text at the character level with a font-adaptive neural network for extracting font structure and a color-preserving model for extracting text color. SRNet [49] breaks down scene text editing into two sub-tasks, which involve extracting the image background and text spatial alignment, and a fusion model is then used to generate the target text with the extracted information. Mostel [34] further incorporates additional stroke-level information to improve scene text editing performance. Despite the reasonable performances, these methods are limited in generating text in arbitrary styles and locations and often result in less natural-looking images.

Diffusion models Recent advances in diffusion models have achieved significant success in image editing [4, 5, 17, 26, 30, 31, 39, 48, 50, 51]. Stable diffusion [37] is one of the state-of-the-art diffusion models, which enables effective text-conditional image generation by first compressing images into a low-dimensional space with an autoencoder and then leveraging text encodings with a cross-attention layer. The model could be easily adapted for various tasks like image inpainting and image editing conditioned on texts. However, it has been observed that the diffusion models exhibit poor visual text generation performance and are often susceptible to incorrect text generation [36, 40]. There is a limited amount of research focusing on improving the text generation capabilities of diffusion models. A recent study has sought to improve the generation of visual text images by training a character-aware diffusion model conditioned on a large character-aware text encoder [27]. However, this work differs from our method in the application, as they concentrate on text-to-image generation, while our work focuses on editing texts within an image. In contrast to their single-encoder architecture, our approach incorporates dual encoders to provide character and style encoding for the target text, respectively. Another concurrent work, ControlNet [57], has demonstrated exceptional performance in image editing by providing the model with references such as canny edge images and segmentation maps. However, the requirement for such references makes it challenging to apply to scene text editing. In contrast, our method only needs natural language instruction to control the generated text and style, enjoying better scalability and flexibility.

3. Methodology

The proposed DIFFSTE aims to improve the pre-trained diffusion models in their scene text editing ability. We specifically use the SD, a state-of-the-art diffusion model, as our backbone, but the proposed methodology is general to other text-to-image diffusion model architectures. The key architectural innovation of DIFFSTE is to augment SD

with an additional character-level encoder to form a dual-encoder structure. We will first elaborate on our model architecture with the dual-encoder design. An illustration can be seen in Figure 3. Next, we will describe our instruction tuning framework for training our model.

3.1. The Dual-encoder Design

Our goal is to equip pre-trained diffusion model SD with the ability to accurately capture the spelling of the target text while understanding the provided instructions for generating the target text in the desired style and font. To achieve this, we consider a dual-encoder architecture in DIFFSTE, which consists of an instruction encoder ENC_{inst} and a character encoder ENC_{char} . The instruction encoder ENC_{inst} is inherited from the text encoder of SD, namely, a CLIP [35] text encoder. It is expected to encode the desired style information for target text generation with the proper instruction as input. In contrast, the character encoder ENC_{char} is a new add-on module to SD that takes only the target text to be generated tokenized at the character level as input, providing DIFFSTE the direct access to the correct spelling.

To incorporate the information from both encoders, we modify only the cross-attention module from SD. Specifically, unlike SD, which only computes the cross-attention from the instruction encoder side, we construct the cross-attention layer by first separately attending to the embeddings from the instruction and character levels and then aggregating the attended results using a simple average. As shown in Figure 3, both encodings are used to attend the intermediate hidden representation z (output of the previous layer) in the UNet components during visual denoising. The averaged result is then fed into the following UNet layer. By applying this modified cross-attention at every denoising layer, the generated clean image at the end of the diffusion process is expected to be natural, with correct spelling, and consistent with the language instruction.

3.2. Instruction Tuning

We adopt an instruction tuning framework to train our model to understand the scene text editing task. Similar to the instruction tuning technique in the NLP area, where foundation models are taught to follow task instructions to perform the corresponding task, our goal is to teach our dual-encoder DIFFSTE model to accurately map text instructions to the corresponding visual appearance. To achieve this goal, we first introduce a synthetic dataset using an automatic rendering engine. Each constructed example contains ① a language instruction that describes the desired target text, ② a masked image indicating where scene text editing should be performed, and ③ a corresponding ground truth image. We have also included existing real-world scene text editing datasets in our instruction tuning process to enable DIFFSTE to generalize to a wide range of

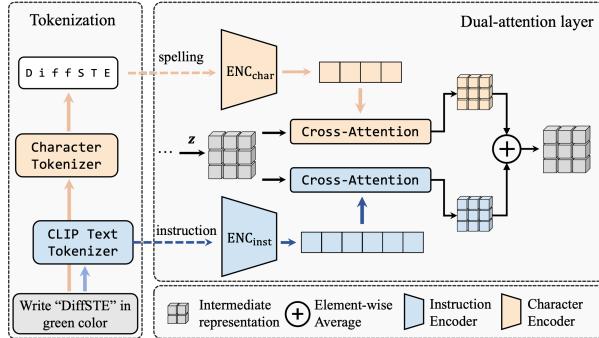


Figure 3: Model structure of DIFFSTE with dual-encoder design. The input text instruction and the target text spelling are first processed by our instruction encoder ENC_{inst} and character encoder ENC_{char} , respectively. Both encodings are attended to the intermediate hidden representation z from previous layer through cross-attention. The results are averaged to guide image generation.

real-world backgrounds and scenarios. In the following, we provide a detailed explanation of how we generate the synthetic dataset and how we convert the existing dataset to a similar format so it can be utilized in our instruction tuning pipeline. Once these datasets are appropriately prepared, DIFFSTE is trained to minimize the MSE loss between the ground truth image and the generated image conditioned on the text instruction and the masked image.

Synthetic dataset creation We begin by randomly selecting a few English words or numerical numbers and pairing each of them with a color and font style. We then utilize a publicly available synthesizing engine, Synthtiger [54], to render each text using its corresponding specified style. Afterward, we apply rotation and perspective transformation to these rendered scene texts [34] and place them in non-overlapping locations on a background image selected at random from the SynthText [15] project. After constructing the image, one random word in the image is masked out to create a masked input, and the corresponding text and style information is utilized to generate task instructions. In particular, we consider two settings to construct the instructions, which are style-free and style-specific. As the name suggests, for the former case, the instruction only provides the specific text we want the model to generate without specifying the style. In this scenario, we ensure that the style of the surrounding scene texts to the masked one is the same and consistent with the masked ground truth. Here, our model is required to follow the style of other texts in the surrounding area to generate the target text correctly and naturally. For the style-specific setting, we consider three different cases, namely generating the scene text with font specification only, color specification only, and both font

and color specification. Similarly, in the first two partial style instruction cases, the surrounding texts in the masked image always conform to the missing style, so the model could infer the correct style from the background to recover the ground truth image. On the other hand, in the last case, the surrounding texts are not necessarily consistent with the ground truth style of the target text, so the model would have to follow text instructions to generate the correct style.

There are four categories of instructions in total, and we generated these instructions for our synthetic dataset using a simple fixed rule. For the style-free case, our instruction is created simply by using the rule *Write “TEXT”*, where TEXT is the ground truth masked word. For the case where the style is specified, we construct the instruction following the rule *Write “TEXT” in color: COLOR and font: FONT*. Furthermore, for the partial style-missing case, we modify the previous full instruction rule and remove the corresponding missing information. Although our instructions are created following a very simple rule, we will later show that the model tuned with these instructions can generalize well to other free-form language instructions.

Real-world dataset utilization Commonly used real-world scene editing datasets such as ArT [9], COCOText [13], and TextOCR [44] only provide the bounding box locations of scene texts in images without text style information. Therefore, we only generate style-free instructions to pair with real-world images for instruction tuning.

4. Experiments

4.1. Experiment Setup

Datasets As described in Section 3.2, we collect 1.3M examples by combining the synthetic dataset (Synthetic) and three real-world datasets (ArT[9], COCOText[13], and TextOCR [44]) for instruction tuning. For the Synthetic dataset, we randomly pick up 100 font families from the google fonts library² and 954 XKCD colors³ for text rendering. We randomly select 200 images for validation and 1000 images for testing from each dataset. Additionally, we test our method on another real-world dataset, ICDAR13 [22], to assess the model’s generalization ability. Different from the training examples described in Section 3.2, the language instruction for each test example is constructed with a random target text which is different from the text in the original image. In this way, we focus on the more realistic text editing task and measure the result quality with human evaluation. All the images are cropped/resized to 256×256 resolution as model inputs. More details could be found in Appendix B.

²<https://fonts.google.com>

³<https://xkcd.com/color/rgb/>

		ArT	COCOText	TextOCR	ICDAR13
Input					
	SRNET				
	MOSTEL				
	SD				
	SD2				
	SD-FT				
	SD2-FT				
Ours					

Figure 4: Examples of style-free text editing results on four real-world datasets.

Baselines We compare DIFFSTE with state-of-the-art GAN-based style-transfer methods and diffusion models described below. The GAN-based methods include SRNET [49] and MOSTEL [24]. The training of SRNET requires “parallel” image pairs with different texts appearing at the same location and background, which is not available for real-world datasets, so we fine-tune the released model of SRNET only on our synthetic dataset. We use the original model for MOSTEL as we empirically find that fine-tuning on our data does not improve its performance. For the diffusion model baselines, we include pre-trained stable-diffusion-inpainting (SD) and stable-diffusion-2-inpainting (SD2). These two models are further fine-tuned by instruction tuning in the same way as our method, as described in Section 3.2. The resulting models are termed as SD-FT and SD2-FT. More implementation details could be found in Appendix B.

Evaluation and metrics Our evaluations are conducted under style-free and style-conditional settings. Style-free generation focuses on the correctness and naturalness of the generated texts, with the language instruction only describing the target text content. All diffusion-based methods are fed with the text instruction and the masked image. On the other hand, as GAN-based models SRNET and MOSTEL cannot take text instructions as input, we feed them with the cropped-out text region for editing in the original image and a rendered text image with the target text. Their outputs are filled into the masked image as the final generation. Note that the GAN-based methods enjoy extra advantages compared with ours as they have access to the style of the original text. This makes it easier for them to generate natural-looking images by simply following the original text style. In contrast, our method has to infer the style of the target text from other surrounding texts in the masked image for a

	ArT	COCOTEXT	TextOCR	ICDAR13				
INPUT								
RERENDERED	jpg	survey	boundaries	amazing	kenneth	better	retailer	CZECH
SRNET								
MOSTEL								
SD								
SD2								
SD-FT								
SD2-FT								
Ours								

Figure 5: Examples of style-conditional text editing results. We show RERENDERED texts as references for target text and desired style.

natural generation.

For the style-conditional generation, we require all methods to generate the target text following a specified style. In this setting, the text instruction describes the target text with a random color and font style specified. The diffusion-based methods are fed with the style-specified text instruction and the masked image. However, the GAN-based style transfer models, SRNET and MOSTEL, do not support style specification by texts. Thus, we synthesize a style reference image of a random text using the specified font and color as well as a rendered image with target text. Both images are fed into GAN-based models as input, and the resulting output is filled into the masked image as the final generation. Note that the style reference images can be different in

synthetic and real-world testing sets. For the synthetic testing set, the synthesized reference image contains the same background as the original image. For the real-world testing sets, a pure-colored background is used as we can not synthesize an image with texts in the specified target style on the same background as the original image.

We evaluate the effectiveness of our method from three aspects: ① text correctness, ② image naturalness, and ③ style correctness. For ① text correctness, we report the *OCR* accuracy, which is calculated as the exact match rate between the target text and the recognized text from the generation by a pre-trained recognition model [11]. Human evaluation of the text accuracy is also reported, denoted as *Cor*. For ② image naturalness, we ask the human evaluator to

Method	Style-free generation												Average					
	Synthetic			ArT			COCOText			TextOCR			ICDAR13					
	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>Nat</i> ↑	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>Nat</i> ↑	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>Nat</i> ↑	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>Nat</i> ↑	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>Nat</i> ↑	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>Nat</i> ↑
SRNET	50.74	44	-28	30.45	42	-16	26.87	84	-68	31.14	42	-40	30.13	46	-52	33.87	51.6	-40.8
MOSTEL	71.51	80	-12	60.99	70	-20	24.11	84	-40	46.11	56	-52	52.23	60	-20	50.99	70.0	-28.8
SD	3.12	6	-40	5.39	6	0	12.46	10	-16	8.22	4	-40	4.56	6	-44	6.75	6.4	-28.0
SD2	4.61	8	-32	7.28	16	-20	19.34	14	-36	11.88	14	-30	9.13	8	-48	10.45	12.0	-33.2
SD-FT	29.51	34	-64	32.08	34	-40	51.62	60	-4	48.91	44	-48	25.29	30	-24	37.48	40.4	-36.0
SD2-FT	37.53	46	-40	46.17	44	-48	56.13	50	-32	60.82	56	-24	43.32	46	-32	48.79	48.4	-35.2
OURS	83.79	86	-	83.08	86	-	84.05	88	-	85.48	82	-	81.79	84	-	83.64	85.2	-

Method	Style-conditional generation												Average					
	Synthetic			ArT			COCOText			TextOCR			ICDAR13					
	<i>Font</i> ↑	<i>Color</i> ↑	<i>Font</i> ↑	<i>Color</i> ↑	<i>Font</i> ↑	<i>Color</i> ↑	<i>Font</i> ↑	<i>Color</i> ↑	<i>Font</i> ↑	<i>Color</i> ↑	<i>Font</i> ↑	<i>Color</i> ↑	<i>Font</i> ↑	<i>Color</i> ↑	<i>Font</i> ↑	<i>Color</i> ↑	<i>Font</i> ↑	<i>Color</i> ↑
SRNET	-8	0	-16	6	-10	8	4	28	-36	20	-13.2	12.4						
MOSTEL	0	8	-18	-18	-28	-8	-24	14	-46	14	-23.2	2.0						
SD	-86	-72	-82	-72	-76	-54	-82	-54	-80	-76	-81.2	-65.6						
SD2	-86	-70	-84	-68	-62	-48	-76	-64	-70	-68	-75.6	-63.6						
SD-FT	-74	-36	-76	-44	-66	-34	-70	-38	-60	-38	-69.2	-38.0						
SD2-FT	-72	-16	-78	-28	-74	-34	-68	-24	-60	-32	-70.4	-26.8						
OURS	72.39	82	-	74.82	80	-	73.38	84	-	73.67	72	-	79.26	84	-	74.70	80.4	-

Table 1: Quantitative evaluation on five datasets with style-free generation (top) and style-conditional generation (bottom). Text correctness rate is evaluated by both automatic OCR model (*OCR*) and human labelling (*Cor*). The image naturalness (*Nat*) is evaluated by human, with the difference of vote percentage between each baseline and our method reported. A positive *Nat* value indicates the corresponding baseline is better than ours. All the numbers are in percentage.

Method	Synthetic		ArT		COCOText		TextOCR		ICDAR13		Average							
	<i>Font</i> ↑	<i>Color</i> ↑																
SRNET	-8	0	-16	6	-10	8	4	28	-36	20	-13.2	12.4						
MOSTEL	0	8	-18	-18	-28	-8	-24	14	-46	14	-23.2	2.0						
SD	-86	-72	-82	-72	-76	-54	-82	-54	-80	-76	-81.2	-65.6						
SD2	-86	-70	-84	-68	-62	-48	-76	-64	-70	-68	-75.6	-63.6						
SD-FT	-74	-36	-76	-44	-66	-34	-70	-38	-60	-38	-69.2	-38.0						
SD2-FT	-72	-16	-78	-28	-74	-34	-68	-24	-60	-32	-70.4	-26.8						
OURS	72.39	82	-	74.82	80	-	73.38	84	-	73.67	72	-	79.26	84	-	74.70	80.4	-

Table 2: Human evaluation results of font and color correctness for style-conditional generation. We report the difference of votes in percentage between each baseline and our method. A positive value indicates the method is better than ours.

compare the generated images by a certain baseline and our method DIFFSTE, and the vote rate gap (vote of baseline minus vote of DIFFSTE) is reported as naturalness score *Nat*. For ③ style correctness, under the style-specific evaluation setting, human evaluators are presented with a rendered reference image of the target text in the specified style and are asked to vote between a baseline and our method *w.r.t.* font correctness and color correctness of the generated images. The resulting vote gaps are reported as *Font* and *Color*, respectively. All human evaluation results are conducted on 50 randomly selected images for each of the five datasets. More details could be found in Appendix A.

4.2. Experiment Results

Style-free generation The quantitative results for style-free generation are shown in Table 1. We observe that our method DIFFSTE consistently achieves better text correctness and image naturalness than other baselines over all datasets. For example, DIFFSTE improves average *OCR* accuracy and human-evaluated text correctness (*Cor*) by 64.0% and 21.7% compared with the most competitive

baseline MOSTEL. For human evaluated naturalness (*Nat*), DIFFSTE outperforms all other baselines by at least 28% more vote percentage on average. Besides, the superiority of our method over other fine-tuned diffusion-based methods SD-FT and SD2-FT have demonstrated the effectiveness of our newly introduced character encoder.

We present the qualitative results in Figure 4 and Appendix D.1. We emphasize the effectiveness of DIFFSTE as follows. First, DIFFSTE generates texts strictly following the given instruction, which is consistent with the superior performance of DIFFSTE in terms of text correctness in quantitative evaluation. In comparison, other diffusion-based baselines are prone to generating wrong spellings, while the GAN-based methods tend to generate blurry and ambiguous texts and thus get low text correctness. For example, in the ArT dataset with the target text “difference”, with our method perfectly generating the correct text, SD-FT generates “DIFEFRERE” while the generation of MOSTEL is hard to read due to the blur. Second, our method generates more natural images than other baselines. For example, in the TextOCR dataset with “One” target text, the “One” generated by DIFFSTE conforms to the font and color of other texts in the context. By contrast, GAN-based methods SRNET and MOSTEL also copies the text style from context and generate red “One”, but the edited region is incoherent with the background with a clear boundary.

Style-conditional generation We present the quantitative results of style-conditional generation in Tables 1 and 2. Our key observations are as follows. First, similar to style-free setting, our method achieves the best average text correctness and image naturalness, with 6.5% and 6.9% improvement in *OCR* accuracy and *Cor*, and 5.6% more votes



Figure 6: Examples of font extrapolation with our method DIFFSTE. The last three columns are generated with the text instruction template *Write “TEXT” in font FONT-FORMAT*, where the FORMAT is *Bold*, *Italic* and *Bold Italic*, respectively.

in *Nat*. Second, DIFFSTE achieves the best font and color correctness compared with other diffusion baselines over all datasets. Different from the diffusion models that take text instructions for specifying the style, the GAN-based methods like MOSTEL and SRNET take a reference image of rendered texts with the specified font and color. This unfair advantage explains why the GAN-based methods achieve better average color correctness. However, our method DIFFSTE is still better on font correctness over four of the five datasets with 13.2% more vote percentage in average.

We present qualitative results in Figure 5 and Appendix D.2. It is shown that our model consistently generates correct texts that conform to specified text styles. Although GAN-based methods also generate texts following the specified color, they suffer from poor font correctness. An example could be seen for “survey” text in *Art* dataset. Besides, GAN-based methods cannot capture the orientation of surrounding texts. With oblique surrounding texts in *TextOCR* dataset over “better” target text, SRNET and MOSTEL still tend to generate horizontal texts, resulting in unnaturalness. On the other hand, pre-trained diffusion models SD and SD2 completely ignore the styles specified in the instruction, and the problem is mitigated in SD-FT and SD2-FT after fine-tuning, demonstrating that our instruction tuning framework could improve the style controllability. Despite the improvement in style correctness, the fine-tuned diffusion models still cannot fully capture the specified style compared to our method DIFFSTE and struggle with incorrect text spelling, demonstrating the effectiveness of our dual-encoder model architecture. For example, SD2-FT generates “JPG” in *Art* dataset when the target text is lower cased “jpg”. Additional experiment results with ablation study on instruction tuning could be seen in Appendix C.

4.3. Zero-shot Style Combination

In this section, we show that our method can create new text styles by composing basic font attributes in a zero-shot manner benefitting from instruction tuning. We consider



Figure 7: Control text color using natural language instructions with our method DIFFSTE. The color is described with words “*grass colored*”, “*add cherry color to*” and “*in the color of sky*” for the right three columns, respectively.

two settings: font extrapolation and font interpolation.

Font extrapolation In the font extrapolation experiment, we require the model to generate texts in a certain font style but with an unseen format such as *italic*, *bold*, or both of them. None of these formats were seen during training for the given font. We append format keyword *italic*, *bold* to those fonts with no such format in training data and give the model the extrapolated font name. As shown in Figure 6, the generated texts in the image appear inclined or bolded when we append the format keyword, showing that our method can successfully generalize to unseen font variations while maintaining correctness and naturalness.

Font interpolation In the font interpolation experiment, we require the model to generate texts with a mix of two certain font styles, which does not correspond to a particular font style in the real world and was not seen during training. We feed the model with the following instruction template: *Write “TEXT” in font FONT1 and FONT2*, where the FONT1 and FONT2 are the names of two fonts seen in model training. The qualitative results can be seen in Figure 2, where a new font is generated by mixing *MoonDance* and *PressStart2P*. More results are in Appendix D.3.

4.4. Editing with Natural Language Instruction

Although we only use static text instruction templates during instruction tuning, we show that our method still shows good scene text editing ability with natural language instructions. The qualitative results can be seen in Figure 7, where we feed the model with instructions such as “*The word “HOTEL” in the color of sky*” instead of the fixed templated instruction seen in training. We show that the model has learned the mapping from instructions to visual text appearances in the generated image following the specified text style. This demonstrates that our instruction tuning framework brings the model the generalization ability to unseen text instructions, which is consistent with previous findings in NLP area [41, 47]. The compatibility with natural language instructions makes our model easier

to use for non-expert users and enables our model to work in vast downstream applications like chat robots. More results could be seen in Appendix D.4.

5. Conclusion

In this paper, we present a novel method DIFFSTE to improve pre-trained diffusion models for scene text editing with a dual encoder design. An instruction-tuning framework is introduced for teaching our model the mapping from the text instruction to scene text generation. Empirical evaluations on five datasets demonstrate the superior performance of DIFFSTE in terms of text correctness, image naturalness, and style controllability. DIFFSTE also shows zero-shot generalization ability to unseen text styles and natural language instructions.

References

- [1] Scaling instruction-finetuned language models. *ArXiv*, abs/2210.11416, 2022. 2
- [2] Gantugs Atarsaikan, Brian Kenji Iwana, Atsushi Narusawa, Keiji Yanai, and Seiichi Uchida. Neural font style transfer. In *2017 14th IAPR international conference on document analysis and recognition (ICDAR)*, volume 5, pages 51–56. IEEE, 2017. 1
- [3] Samaneh Azadi, Matthew Fisher, Vladimir G. Kim, Zhaowen Wang, Eli Shechtman, and Trevor Darrell. Multi-content gan for few-shot font style transfer. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2018. 1
- [4] Yogesh Balaji, Seungjun Nah, Xun Huang, Arash Vahdat, Jiaming Song, Karsten Kreis, Miika Aittala, Timo Aila, Samuli Laine, Bryan Catanzaro, et al. ediffi: Text-to-image diffusion models with an ensemble of expert denoisers. *arXiv preprint arXiv:2211.01324*, 2022. 1, 3
- [5] Manuel Brack, Felix Friedrich, Dominik Hintersdorf, Lukas Struppek, Patrick Schramowski, and Kristian Kersting. SegA: Instructing diffusion using semantic dimensions. *arXiv preprint arXiv:2301.12247*, 2023. 3
- [6] Tim Brooks, Aleksander Holynski, and Alexei A Efros. Instructpix2pix: Learning to follow image editing instructions. *arXiv preprint arXiv:2211.09800*, 2022. 2
- [7] Jacky Cao, Kit-Yung Lam, Lik-Hang Lee, Xiaoli Liu, Pan Hui, and Xiang Su. Mobile augmented reality: User interfaces, frameworks, and intelligence. *ACM Computing Surveys*, 55(9):1–36, 2023. 1
- [8] Jifan Chen, Yuhao Zhang, Lan Liu, Rui Dong, Xinchi Chen, Patrick Ng, William Yang Wang, and Zhiheng Huang. Improving cross-task generalization of unified table-to-text models with compositional task configurations. *arXiv preprint arXiv:2212.08780*, 2022. 2
- [9] Chee Kheng Chng, Yuliang Liu, Yipeng Sun, Chun Chet Ng, Canjie Luo, Zihan Ni, ChuanMing Fang, Shuaitao Zhang, Junyu Han, Errui Ding, et al. Icdar2019 robust reading challenge on arbitrary-shaped text-rrc-art. In *2019 International Conference on Document Analysis and Recognition (ICDAR)*, pages 1571–1576. IEEE, 2019. 4
- [10] Jun Du, Qiang Huo, Lei Sun, and Jian Sun. Snap and translate using windows phone. In *2011 International Conference on Document Analysis and Recognition*, pages 809–813. IEEE, 2011. 1
- [11] Shancheng Fang, Hongtao Xie, Yuxin Wang, Zhendong Mao, and Yongdong Zhang. Read like humans: Autonomous, bidirectional and iterative language modeling for scene text recognition. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7098–7107, 2021. 6
- [12] Victor Fragoso, Steffen Gauglitz, Shane Zamora, Jim Kleban, and Matthew Turk. Translatar: A mobile augmented reality translator. In *2011 IEEE workshop on applications of computer vision (WACV)*, pages 497–502. IEEE, 2011. 1
- [13] Raul Gomez, Baoguang Shi, Lluis Gomez, Lukas Numann, Andreas Veit, Jiri Matas, Serge Belongie, and Dimosthenis Karatzas. Icdar2017 robust reading challenge on coco-text. In *2017 14th IAPR International Conference on Document Analysis and Recognition (ICDAR)*, volume 1, pages 1435–1443. IEEE, 2017. 4
- [14] Yuxian Gu, Pei Ke, Xiaoyan Zhu, and Minlie Huang. Learning instructions with unlabeled data for zero-shot cross-task generalization. *arXiv preprint arXiv:2210.09175*, 2022. 2
- [15] Ankush Gupta, Andrea Vedaldi, and Andrew Zisserman. Synthetic data for text localisation in natural images. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2016. 4
- [16] Prakhar Gupta, Cathy Jiao, Yi-Ting Yeh, Shikib Mehri, Maxine Eskenazi, and Jeffrey P Bigham. Improving zero and few-shot generalization in dialogue through instruction tuning. *arXiv preprint arXiv:2205.12673*, 2022. 2
- [17] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *Advances in Neural Information Processing Systems*, 33:6840–6851, 2020. 1, 3
- [18] Or Honovich, Thomas Scialom, Omer Levy, and Timo Schick. Unnatural instructions: Tuning language models with (almost) no human labor. *arXiv preprint arXiv:2212.09689*, 2022. 2
- [19] Qirui Huang, Bin Fu, Yu Qiao, et al. Gentext: Unsupervised artistic text generation via decoupled font and texture manipulation. *arXiv preprint arXiv:2207.09649*, 2022. 1, 2
- [20] Joel Jang, Seungone Kim, Seonghyeon Ye, Doyoung Kim, Lajanugen Logeswaran, Moontae Lee, Kyungjae Lee, and Minjoon Seo. Exploring the benefits of training expert language models over instruction tuning. *arXiv preprint arXiv:2302.03202*, 2023. 2
- [21] Levent Karacan, Zeynep Akata, Aykut Erdem, and Erkut Erdem. Learning to generate images of outdoor scenes from attributes and semantic layouts. *arXiv preprint arXiv:1612.00215*, 2016. 1
- [22] Dimosthenis Karatzas, Lluis Gomez-Bigorda, Angelos Nicolaou, Suman Ghosh, Andrew Bagdanov, Masakazu Iwamura, Jiri Matas, Lukas Neumann, Vijay Ramaseshan Chandrasekhar, Shijian Lu, et al. Icdar 2015 competition on robust reading. In *2015 13th international conference on document analysis and recognition (ICDAR)*, pages 1156–1160. IEEE, 2015. 4

[23] Yuxin Kong, Canjie Luo, Weihong Ma, Qiyuan Zhu, Shenggao Zhu, Nicholas Yuan, and Lianwen Jin. Look closer to supervise better: One-shot font generation via component-based discriminator. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13482–13491, 2022. 2

[24] Yuxin Kong, Canjie Luo, Weihong Ma, Qiyuan Zhu, Shenggao Zhu, Nicholas Yuan, and Lianwen Jin. Look closer to supervise better: One-shot font generation via component-based discriminator. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13482–13491, 2022. 5

[25] Junyeop Lee, Yoonsik Kim, Seonghyeon Kim, Moonbin Yim, Seung Shin, Gayoung Lee, and Sungrae Park. Rewritenet: Reliable scene text editing with implicit decomposition of text contents and styles. *arXiv preprint arXiv:2107.11041*, 2021. 1, 2

[26] Ziyi Li, Qinye Zhou, Xiaoyun Zhang, Ya Zhang, Yanfeng Wang, and Weidi Xie. Guiding text-to-image diffusion model towards grounded generation. *arXiv preprint arXiv:2301.05221*, 2023. 3

[27] Rosanne Liu, Dan Garrette, Chitwan Saharia, William Chan, Adam Roberts, Sharan Narang, Irina Blok, RJ Mical, Mohammad Norouzi, and Noah Constant. Character-aware models improve visual text rendering. *arXiv preprint arXiv:2212.10562*, 2022. 3

[28] Swaroop Mishra, Daniel Khashabi, Chitta Baral, and Hannaneh Hajishirzi. Cross-task generalization via natural language crowdsourcing instructions. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3470–3487, Dublin, Ireland, May 2022. Association for Computational Linguistics. 2

[29] Niklas Muennighoff, Thomas Wang, Lintang Sutawika, Adam Roberts, Stella Biderman, Teven Le Scao, M Saiful Bari, Sheng Shen, Zheng-Xin Yong, Hailey Schoelkopf, et al. Crosslingual generalization through multitask finetuning. *arXiv preprint arXiv:2211.01786*, 2022. 2

[30] Alex Nichol, Prafulla Dhariwal, Aditya Ramesh, Pranav Shyam, Pamela Mishkin, Bob McGrew, Ilya Sutskever, and Mark Chen. Glide: Towards photorealistic image generation and editing with text-guided diffusion models. *arXiv preprint arXiv:2112.10741*, 2021. 3

[31] Alexander Quinn Nichol and Prafulla Dhariwal. Improved denoising diffusion probabilistic models. In *International Conference on Machine Learning*, pages 8162–8171. PMLR, 2021. 3

[32] Song Park, Sanghyuk Chun, Junbum Cha, Bado Lee, and Hyunjung Shim. Multiple heads are better than one: Few-shot font generation with multiple localized experts. In *International Conference on Computer Vision (ICCV)*, 2021. 1

[33] Xugong Qin, Yu Zhou, Youhui Guo, Dayan Wu, Zhihong Tian, Ning Jiang, Hongbin Wang, and Weiping Wang. Mask is all you need: Rethinking mask r-cnn for dense and arbitrary-shaped scene text detection. In *Proceedings of the 29th ACM International Conference on Multimedia*, pages 414–423, 2021. 1

[34] Yadong Qu, Qingfeng Tan, Hongtao Xie, Jianjun Xu, Yuxin Wang, and Yongdong Zhang. Exploring stroke-level modifications for scene text editing. *arXiv preprint arXiv:2212.01982*, 2022. 1, 3, 4

[35] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021. 3

[36] Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. Hierarchical text-conditional image generation with clip latents. *arXiv preprint arXiv:2204.06125*, 2022. 1, 3

[37] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10684–10695, 2022. 1, 3

[38] Prasun Roy, Saumik Bhattacharya, Subhankar Ghosh, and Umapada Pal. Stefann: scene text editor using font adaptive neural network. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13228–13237, 2020. 1, 2, 3

[39] Dohoон Ryu and Jong Chul Ye. Pyramidal denoising diffusion probabilistic models. *arXiv preprint arXiv:2208.01864*, 2022. 3

[40] Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily Denton, Seyed Kamyar Seyed Ghasemipour, Burcu Karagol Ayan, S Sara Mahdavi, Rapha Gontijo Lopes, et al. Photorealistic text-to-image diffusion models with deep language understanding. *arXiv preprint arXiv:2205.11487*, 2022. 1, 3

[41] Victor Sanh, Albert Webster, Colin Raffel, Stephen H Bach, Lintang Sutawika, Zaid Alyafeai, Antoine Chaffin, Arnaud Stiegler, Teven Le Scao, Arun Raja, et al. Multi-task prompted training enables zero-shot task generalization. *arXiv preprint arXiv:2110.08207*, 2021. 2, 8

[42] Yangming Shi, Haisong Ding, Kai Chen, and Qiang Huo. Aprnet: Attention-based pixel-wise rendering network for photo-realistic text image generation. *arXiv preprint arXiv:2203.07705*, 2022. 1

[43] Wataru Shimoda, Daichi Haraguchi, Seiichi Uchida, and Kota Yamaguchi. De-rendering stylized texts. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1076–1085, 2021. 2

[44] Amanpreet Singh, Guan Pang, Mandy Toh, Jing Huang, Wojciech Galuba, and Tal Hassner. Textocr: Towards large-scale end-to-end reasoning for arbitrary-shaped scene text. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 8802–8812, June 2021. 4

[45] Jiaming Song, Chenlin Meng, and Stefano Ermon. Denoising diffusion implicit models. *arXiv preprint arXiv:2010.02502*, 2020. 1

[46] Yizhong Wang, Yeganeh Kordi, Swaroop Mishra, Alisa Liu, Noah A Smith, Daniel Khashabi, and Hannaneh Hajishirzi.

Self-instruct: Aligning language model with self generated instructions. *arXiv preprint arXiv:2212.10560*, 2022. 2

[47] Jason Wei, Maarten Bosma, Vincent Y Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du, Andrew M Dai, and Quoc V Le. Finetuned language models are zero-shot learners. *arXiv preprint arXiv:2109.01652*, 2021. 2, 8

[48] Chen Henry Wu and Fernando De la Torre. Unifying diffusion models' latent space, with applications to cyclediffusion and guidance. *arXiv preprint arXiv:2210.05559*, 2022. 3

[49] Liang Wu, Chengquan Zhang, Jiaming Liu, Junyu Han, Jingtuo Liu, Errui Ding, and Xiang Bai. Editing text in the wild. In *Proceedings of the 27th ACM international conference on multimedia*, pages 1500–1508, 2019. 1, 3, 5

[50] Qiucheng Wu, Yujian Liu, Handong Zhao, Ajinkya Kale, Trung Bui, Tong Yu, Zhe Lin, Yang Zhang, and Shiyu Chang. Uncovering the disentanglement capability in text-to-image diffusion models. *arXiv preprint arXiv:2212.08698*, 2022. 3

[51] Shaoan Xie, Zhifei Zhang, Zhe Lin, Tobias Hinz, and Kun Zhang. Smartbrush: Text and shape guided object inpainting with diffusion model. *arXiv preprint arXiv:2212.05034*, 2022. 3

[52] Zhiyang Xu, Ying Shen, and Lifu Huang. Multiinstruct: Improving multi-modal zero-shot learning via instruction tuning. *arXiv preprint arXiv:2212.10773*, 2022. 2

[53] Qiangpeng Yang, Jun Huang, and Wei Lin. Swaptext: Image based texts transfer in scenes. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 14700–14709, 2020. 1, 2

[54] Moonbin Yim, Yoonsik Kim, Han-Cheol Cho, and Sungrae Park. Synthtiger: Synthetic text image generator towards better text recognition models. In *International Conference on Document Analysis and Recognition*, pages 109–124. Springer, 2021. 4, 15

[55] Fangneng Zhan, Shijian Lu, and Chuhui Xue. Verisimilar image synthesis for accurate detection and recognition of texts in scenes. In *Proceedings of the European Conference on Computer Vision (ECCV)*, pages 249–266, 2018. 1

[56] Fangneng Zhan, Hongyuan Zhu, and Shijian Lu. Spatial fusion gan for image synthesis. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 3653–3662, 2019. 2

[57] Lvmin Zhang and Maneesh Agrawala. Adding conditional control to text-to-image diffusion models, 2023. 3

[58] Yexun Zhang, Ya Zhang, and Wenbin Cai. Separating style and content for generalized style transfer. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2018. 1

[59] Wanjun Zhong, Yifan Gao, Ning Ding, Zhiyuan Liu, Ming Zhou, Jiahai Wang, Jian Yin, and Nan Duan. Improving task generalization via unified schema prompt. *arXiv preprint arXiv:2208.03229*, 2022. 2

[60] Chunting Zhou, Junxian He, Xuezhe Ma, Taylor Berg-Kirkpatrick, and Graham Neubig. Prompt consistency for zero-shot task generalization. *ArXiv*, abs/2205.00049, 2022. 2

A. Human Evaluation Details

In this section, we provide a summary of the human evaluations conducted for both style-free and style-conditional generation settings. As outlined in Section 3, we perform human evaluations on Amazon Mturk⁴ for both style-free and style-conditional generation settings. In total, we design six human evaluation tasks to assess the performance of our method from three aspects: ① the accuracy of the generated text in the image; ② the naturalness of the generated image; ③ the correctness of text style in terms of font and color.

Human evaluation for style-free generation To evaluate style-free image generation, we assess the generated images from two aspects: ① *Cor*, text correctness, where evaluators check whether the generated image matches the exact target text. The user interface is shown in Figure 8. ② *Nat*, image naturalness, where evaluators select the more natural and visually coherent image between those generated by our method and another baseline method. In other words, the chosen image should look more like a natural image, and the completed missing part should be visually coherent with the surrounding region. The user interface is shown in Figure 9.

Human evaluation for style-conditional generation To evaluate style-conditional generation, we assess the generated images from three aspects: ① *Cor*, text correctness, which is the same as the style-free generation setting. ② *Nat*, image naturalness, where evaluators select a more natural image between those generated by our method and other baseline methods. We note that in the style-conditional generation setting, the specified color in instructions may not be coherent with the surrounding region. Therefore, we exclude the coherence criterion for image naturalness in this evaluation. The user interface for is depicted in Figure 10. ③ *Font and Color*, style correctness, where evaluators compare images generated by our method and other baseline methods and select a better one based on how similar the generated texts are to a given reference image in terms of font or color, respectively. The user interfaces are shown in Figure 11 and Figure 12.

Instructions:

Please read the instructions carefully. Failure to follow the instructions will lead to rejection of your results.

In this task, you will see an image in which a certain area is highlighted with a red box. Your task is to determine whether the text's spelling in this area matches the target text shown above the image. It is important that the spelling need to be exactly the same as the target text. Specifically, the following cases are considered incorrect:

- Additional characters, e.g. the generated text is 'apples' but the target text is 'apple'.
- Missing characters, e.g. the generated text is 'appe' but the target text is 'apple'.
- Mismatched capitalization, e.g. the generated text is 'Apple' but the target text is 'apple'.

We provide an example to help you understand the criteria.



In this example, you should choose Yes. It is important that all we care about is the correctness of text spelling within the highlighted area. Although the text in this region is blurry, it has the correct target text 'hosting'.

Figure 8: Instructions of human evaluation on text correctness.

⁴<https://www.mturk.com>

Instructions:

Please read the instructions carefully. Failure to follow the instructions will lead to the rejection of your results. In this task, you will be asked to judge and compare the quality of two AI-edited images. Specifically, you will first see one source image with some parts missing. Then, you will see two candidate images, where the missing part is completed by two AI algorithms. Your task is to determine which of the two candidate images is more visually natural and coherent. It is important that we only care about the visual naturalness and coherence of the completed missing part regardless of anything else, such as the correctness of the text spelling.

There are two criteria for this task:

- First, the edited image should look like a natural image. It should not contain a lot of artifacts, distortion, or non-commonsensical scenes. The completed part should not be blurry and there should be no clear boundary between this completed part and the surrounding region.
- Second, the completed missing part should be visually coherent with the surrounding region. If there is any other text in the surroundings, the text in the completed region should match the style of these texts in terms of shape and color.

We provide an example to help you understand the criteria.



In this example, you should choose Candidate 1 as the better one. It is important that the completed text in the missing region matches the style of surrounding texts. Candidate 2, however, has a black text, which does not align well with other red surrounding texts, which does not meet our criteria on coherence.

Figure 9: Instructions of human evaluation based on image naturalness and coherence.


Instructions:

Please read the instructions carefully. Failure to follow the instructions will lead to rejection of your results. In this task, you will be asked to judge and compare the quality of two AI-edited images. Specifically, you will first see one source image with some parts missing. Then, you will see two candidate images, where the missing part is completed by two AI algorithms. Your task is to determine which of the two candidate images is more visually natural. It is important that we only care about the visual naturalness of the completed missing part regardless of anything else, such as the correctness of the text spelling.

There are one criteria for this task:

- The edited image should look like a natural image. It should not contain a lot of artifacts, distortion, or non-commonsensical scenes. The completed part should not be blurry and there should be no clear boundary between this completed part and the surrounding region.

We provide an example to help you understand the criteria.

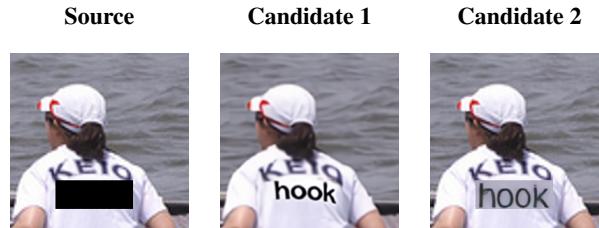

In this example, you should choose Candidate 1 as the better one. It is important that the completed part of the image is not blurry and there is no clear boundary between completed part and surrounding image. Candidate 2, however, has a clear boundary between the completed part and the surrounding region, which does not meet our criteria on naturalness.

Figure 10: Instructions of human evaluation on image naturalness.

Instructions:

Please read the instructions carefully. Failure to follow the instructions will lead to rejection of your results. In this task, you will be asked to judge and compare the quality of two AI-edited images. Specifically, you will first see a reference image with a certain text that specifies the desired font style we want the AI model to generate. Then, you will see two candidate images, both of which have some parts highlighted with a red box. Your task is to determine which of the two candidate images appears more similar to the reference image in terms of font style. More specifically, font style refers to the shape of characters and whether the text is bold or italic. It is important to note that we only care about the font style of the text, regardless of anything else, such as the correctness of the text spelling or the color of the text. There is a "hard-to-tell" option available if you cannot decide which is better, but please try your best to avoid using this option.

We provide an example to help you understand the criteria.



In this example, you should choose Candidate 1 as the better one. It is important that all we care about is whether the font style of text is similar to the reference image. You can see that the shape of characters in Candidate2 is not the same as the reference image, e.g. the character O is not similar. Therefore, you should choose Candidate1 as the better one despite that the text spelling in Candidate 1 is not the same as the reference image.

Figure 11: Instructions of human evaluation on font correctness.

Instructions:

Please read the instructions carefully. Failure to follow the instructions will lead to rejection of your results. In this task, you will be asked to judge and compare the quality of two AI-edited images. Specifically, you will first see a reference image with a certain text that specifies the color of the text that we want the AI model to generate. Then, you will see two candidate images, both of which have some parts highlighted with a red box. Your task is to determine which of the two candidate images appears more similar to the reference image in terms of the text color. It is important to note that we only care about the color of the text, regardless of the spelling correctness or font type. There is a "hard-to-tell" option for you to choose if you cannot decide which is better, but please try your best to avoid using this option.

We provide an example to help you understand the criteria.



In this example, you should choose Candidate 2 as the better one. It is important that all we care about is whether the color of text is similar to the reference image. Candidate 2 is better since the text in the highlighted area looks more purple, which is similar to the reference image, despite that the text content is not the same.

Figure 12: Instructions of human evaluation on color correctness.

B. Implementation Details

B.1. Dataset Details

As mentioned in Section 4.1, we construct the synthetic dataset using a publicly available engine Synthtiger [54]. We randomly selected 100 font families in the google fonts library and 954 named XKCD colors to render the texts. During the creation process, we first randomly sample several English words or numerical numbers (1-5) and render them using a random color and font style. Then we apply the same rotation and perspective transformation to these rendered scene texts and place them on a 256×256 background image non-overlappingly. In training time, a random word in the image is masked out and the model is trained to restore the full image including the text in the masked part. Figure 13 shows examples of the created synthetic data and the masked input for model training. Besides the synthetic data, we also include real-world OCR datasets in the training set, where the word in image is masked out for training. In total, we collect 1.3M training examples with 600K synthetic examples and 700K real-world examples.

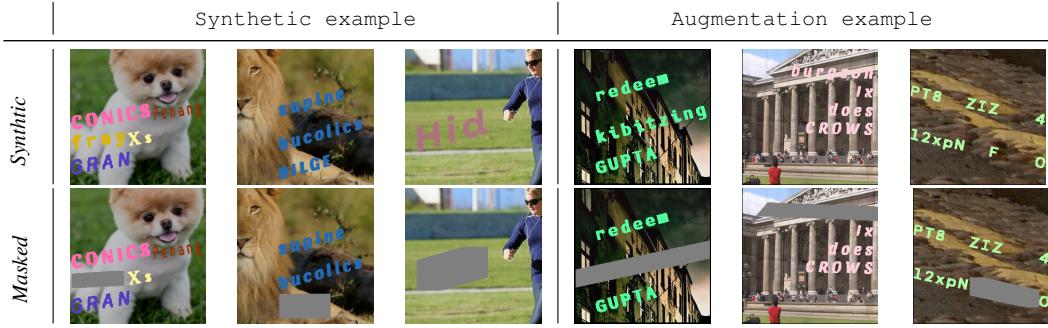


Figure 13: Example images of synthetic data(first row) and the masked input(second row) we use to fine-tune the model.

B.2. Model Details

GAN-based methods We implement the GAN-based method, SRNET and MOSTEL using their publicly released code. We created additional synthetic examples where different texts of the same style are put at the same location in the background image to construct paired images for style-transfer training, which is only used in fine-tuning SRNET. Real-world datasets are not included in training SRNET since it requires paired images with same background but different texts, which is not given in real-world datasets. For SRNET, we follow the hyperparameters reported in their paper to fine-tune the released model. For MOSTEL, fine-tuning the released model on the created synthetic data does not improve its performance on real-world datasets. Therefore the released checkpoint is used for comparison.

Diffusion-based methods All diffusion-based methods are built upon *diffusers*⁵. For the pre-trained diffusion models, we use stable-diffusion-inpainting⁶(SD) and stable-diffusion-2-inpainting⁷(SD2). We further fine-tune SD and SD2 using our instruction tuning framework, where the resulting models are termed as SD-FT and SD2-FT. For our method DIFFSTE, we use SD as the backbone⁸ and randomly initialize the character-embedding layer and corresponding cross-attention weights. The dimension of character embedding is 32, and the number of cross-attention heads is 8. We use the same hyperparameters to train SD-FT, SD2-FT, and our method DIFFSTE. The batch size is set to 256. We use the AdamW optimizer with a fixed learning rate $5e - 5$ to train the model for 15 epochs. In total, the training has 80k steps, which requires approximately two days of training time using eight Nvidia-V100 gpus.

Data augmentation In our initial experiment, we observed a strong correlation between the mask shape and the visual layout of text in the generated image. Specifically, the model tends to duplicate characters to fill the entire masked region even if there are only a few characters to generate. To mitigate this bias, we augment the masks to be larger than the text in the original image. Specifically, we extend the mask region along the direction of the masked word while keeping sure that no other texts are included in the mask. Examples can be seen on the right of Figure 13.

⁵<https://huggingface.co/docs/diffusers>

⁶<https://huggingface.co/runwayml/stable-diffusion-inpainting>

⁷stabilityai/stable-diffusion-2-inpainting

⁸SD2 is not released by the time of our implementation.

C. Ablation Study

Our method DIFFSTE improves upon the pre-trained SD model from two aspects: ① the dual-encoder design with the newly added character encoder; ② the instruction tuning framework that helps model understand the task of scene text editing. In this section, we study the effectiveness of these two designs.

Character encoder We evaluate the effectiveness of the character encoder by comparing the pre-trained backbone model SD, instruction-tuned SD without character encoder, and our method DIFFSTE, the instruction-tuned SD with character encoder. Table 3 shows the quantitative evaluation results on five datasets, where these three models are termed as SD, +INST, and +INST+CHAR respectively. Although instruction tuning (+INST) improves the ability of the pre-trained model SD to generate correct texts with an average of 30% increase in OCR accuracy, the text correctness is way lower than the +INST+CHAR, which is additionally trained with the character encoder. This demonstrates that the dual-encoder design could effectively improve the model’s ability to capture the spelling of target text.

Method	Style-free generation											
	Synthetic		ArT		COCOText		TextOCR		ICDAR13		Average	
	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>OCR</i> ↑	<i>Cor</i> ↑
SD	3.12	6	5.39	6	12.46	10	8.22	4	4.56	6	6.75	6.4
+INST	29.51	34	32.08	34	51.62	60	48.91	44	25.29	30	37.48	40.4
+INST+CHAR	83.79	86	83.08	86	84.05	88	85.48	82	81.79	84	83.64	85.2

Method	Style-conditional generation											
	Synthetic		ArT		COCOText		TextOCR		ICDAR13		Average	
	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>OCR</i> ↑	<i>Cor</i> ↑	<i>OCR</i> ↑	<i>Cor</i> ↑
SD	3.12	6	5.39	6	12.46	10	8.22	4	4.56	6	6.75	6.4
+INST	23.52	16	26.22	18	47.16	42	43.38	40	22.77	18	32.61	26.8
+INST+CHAR	72.39	82	74.82	80	73.38	84	73.67	72	79.26	84	74.70	80.4

Table 3: Quantitative evaluation on five datasets with style-free generation (top) and style-conditional generation (bottom) of the pre-trained backbone model SD, the fine-tuned SD without character encoder (+INST) and the fine-tuned model with character encoder, *i.e.* DIFFSTE(+INST+CHAR). All the numbers are in percentage.

Instruction tuning We evaluate the effectiveness of the instruction tuning framework by comparing DIFFSTE by comparing DIFFSTE with three other models that share the same backbone and character encoder but are trained using different instructions. The models evaluated are trained using instructions without font information, color information, and neither of them, respectively. We denote them as -FONT, -COLOR, and -BOTH.

To evaluate their ability in understanding style specifications in the instructions, we compare the three models with DIFFSTE under the style-conditional generation setting. Similar to Section 4.2, we ask human evaluators to make a pairwise comparison between images generated by these models and DIFFSTE, which is trained on full instructions with font and color information on 50 randomly picked images for each dataset. The quantitative results are shown in Table 4. We observe that removing certain style information in the instructions would lead to a decrease in corresponding style correctness dramatically. For example, without font instructions, -FONT receives 70.0% fewer votes in terms of font correctness, while a 68.8% average drop is observed for color correctness for -COLOR. Without both font and color, -BOTH, descend 74.8% and 70.8% in terms of font and color correctness, even more than -FONT and -COLOR. This further demonstrates the effectiveness of our instruction tuning framework in teaching the model to align text instruction with visual appearances.

Method	Synthetic		ArT		COCOText		TextOCR		ICDAR13		Average	
	<i>Font</i> ↑	<i>Color</i> ↑										
DIFFSTE	-	-	-	-	-	-	-	-	-	-	-	-
-FONT	-72	-	-64	-	-76	-	-70	-	-68	-	-70.0	-
-COLOR	-	-54	-	-66	-	-72	-	-84	-	-68	-	-68.8
-BOTH	-70	-58	-68	-74	-80	-78	-78	-80	-78	-64	-74.8	-70.8

Table 4: Human evaluation results of font and color correctness for no-instruction/partial-instruction tuning. The difference of votes in percentage between the baseline method and our method is reported. A positive value indicates the method is better than ours.

D. Additional Qualitative Results

D.1. Additional Style-free Qualitative Results

We provide additional generated images for editing different texts in the same image by our method DIFFSTE in Figure 14. The first row shows the target text to generate, and each column shows the different generated images on the target text. DIFFSTE consistently generates correct visual text, and the texts naturally follow the same text style, *i.e.* font, and color, with other surrounding texts. The orientation of generated texts also aligns with other texts properly. In addition to the normally shaped masks shown in Figure 14, DIFFSTE is able to generate texts within arbitrarily shaped masks. We provide the qualitative results in Section D.5.



Figure 14: Examples of style-free text editing results on four real-world datasets.

D.2. Additional Style-conditional Qualitative Results

We provide additional examples of editing different texts with specified styles in the same image by our method DIFFSTE in Figure 15. The first row shows the target visual text style in the generated image. Our method DIFFSTE generate correct texts following the specified text styles consistently. The generated texts naturally fit the surrounding region with suitable size and orientation. For example, texts in the last row in Figure 15 are placed in the same orientation with surrounding texts.



Figure 15: Examples of style-conditional text editing results on four real-world datasets.

D.3. Additional Qualitative Results with Zero-Shot Style Combination

Font extrapolation As mentioned in Section 4.2, our method DIFFSTE is able to extend seen font style to unseen formats such as *italic*, *bold* and both of them. We provide additional examples for font extrapolation in Figure 16. Each row shows the input masked image and generated texts using the specified font and the font with other format combinations. The instruction for font combination is generated in this template *Write “TEXT” in font FONT-FORMAT*. As seen in Figure 16, the generated texts are bolded and inclined following the given format keyword, showing the zero-shot generalizability of DIFFSTE.

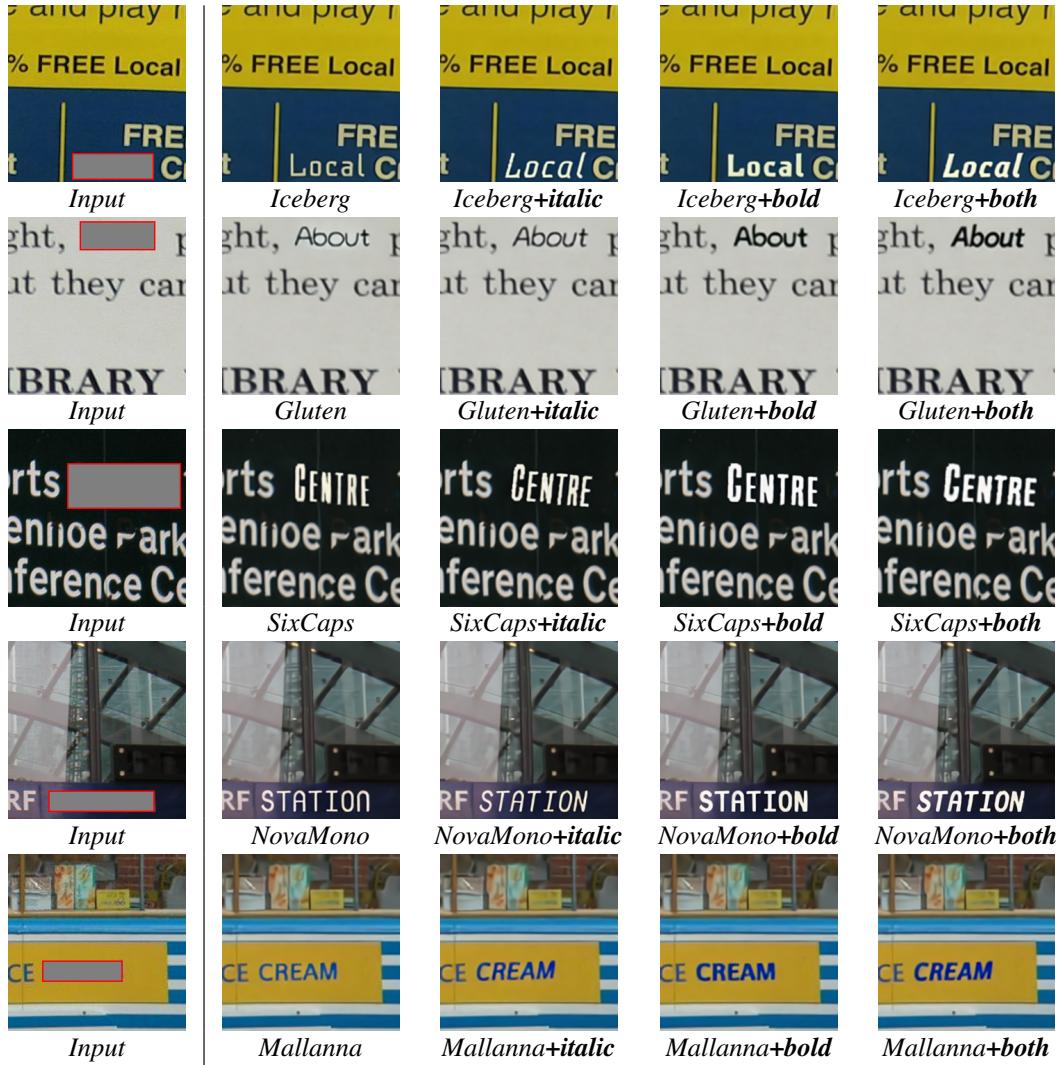


Figure 16: Examples of font extrapolation with our method DIFFSTE.

Font interpolatoin As mentioned in Section 4.2, our method DIFFSTE is able to create a new font style by mixing two seen font styles. We provide additional examples for font interpolation in Figure 17. To generate instructions for mixing font styles, we use the template *Write TEXT in font FONT1 and FONT2*, where FONT1 and FONT2 are two font names seen in training. As seen in Figure 17, DIFFSTE is able to mix the two font styles by merging the glyphs of the same character in different fonts using a simple natural language instruction.

Font1-render	Font1	Font2-render	Font2	Font1 + Font2
THE				
Mews		Mews		
Reload		Reload		
Plant		Plant		
LEGAL				

Figure 17: Examples of font interpolation with our method DIFFSTE.

D.4. Additional Qualitative Results with Natural Language Instructions

We provide additional examples for controlling text color with natural language instructions. In Figure 18, each row shows examples generated using the following instructions generated by ChatGPT⁹: ① A mango-colored word “TEXT”. ② The word “TEXT” resembles the color of an eggplant. ③ The word “TEXT” is colored in a delicate, ladylike shade of lilac. ④ The color of word “TEXT” is like a blazing inferno. ⑤ The color of word “TEXT” is deep, oceanic, reminiscent of the deep sea. ⑥ The color of word “TEXT” used is the fresh, vibrant color of a springtime tree. As seen in Figure 18, DIFFSTE is able to generalize to unseen natural language instructions, which shows the effectiveness of our instruction learning framework in helping the model learn the mapping from natural language instructions to visual text appearances in the generated images.

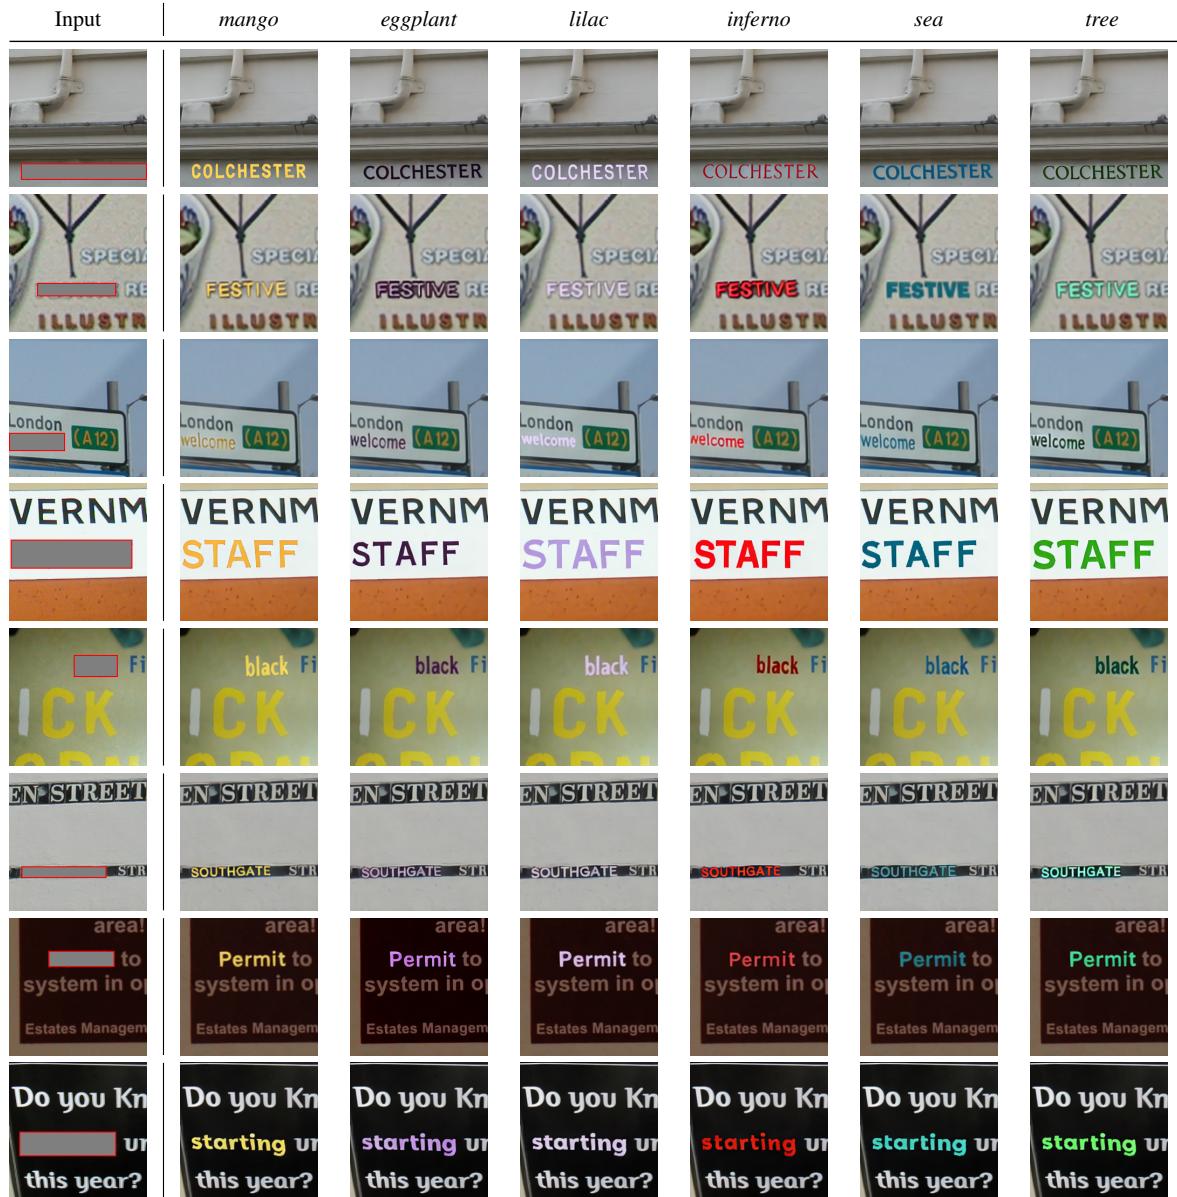


Figure 18: Control text color using different natural language instructions with DIFFSTE.

⁹We provide this instruction to ChatGPT: *Show me some sentences describing the color of a text similar to this "The text is in the color of grass"* and manually exclude unnecessary details from the generated sentences.

D.5. Additional Qualitative Results with Arbitrarily-Shaped Mask

We provide additional examples for our method DIFFSTE editing texts in arbitrarily shaped masks in Figure 19. As seen in Figure 19, our method is able to generate visually appealing text layouts within highly curved and lengthy masks, even when the text to generate is short. Notably, in the fourth row of Figure 19, DIFFSTE successfully generates the words “*The*” and “*five*” in an appropriate layout within the curved mask. Each character is placed in a suitable orientation based on the geometry of the given mask region. In other examples, this is also observed for long texts such as “*boxing*”.



Figure 19: Generate texts within an arbitrarily shaped mask.