


Install Guide

ACC-INT-ANGLE-4

Angle Mount for TD33

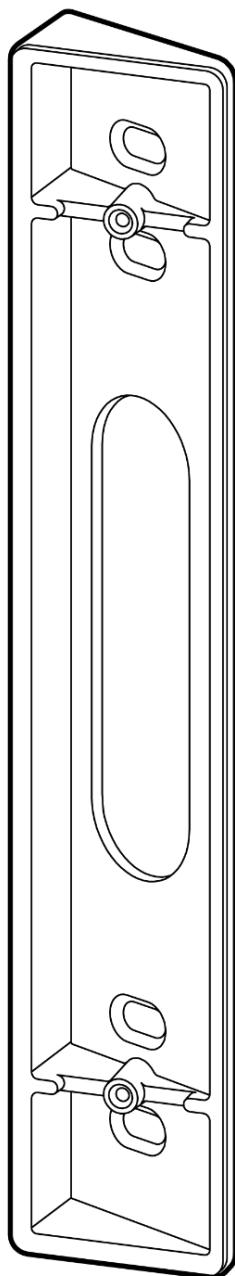

Document Details

Version

V1.0 20241213

(V1.0 published 20241213)

Firmware

Firmware version can be verified on Verkada

Command command.verkada.com.

Product Models

This install guide pertains to models

ACC-INT-ANGLE-4.

© Copyright 2024 Verkada Inc. All rights reserved.

Verkada and the Verkada logo are registered trademarks or service marks of Verkada Inc. ("Verkada"). All other trademarks are the property of their respective owners.


Verkada may make changes to this document at any time without notice. The information presented herein may be inaccurate or outdated, and Verkada is under no obligation to maintain it. ALL INFORMATION IS PROVIDED "AS-IS" AND WITHOUT ANY WARRANTIES, IMPLIED, EXPRESS, OR OTHERWISE. VERKADA DISCLAIMS LIABILITY FOR ALL DAMAGES, INCLUDING WITHOUT LIMITATION ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES, ARISING OUT OF USE OF THIS DOCUMENT.

Any intellectual property rights relating to Verkada products are and shall remain Verkada's exclusive property. Use of any Verkada product is subject to Verkada's end user agreement or other executed agreement with Verkada. No license, either expressed or implied, to use or distribute any Verkada product is granted under this document.

This document may not be sold, resold, licensed or sublicensed and may not be transferred without Verkada's prior written consent. No part of this document may be reproduced in whole or in part without the express written consent of Verkada.

Introduction


What's in the box

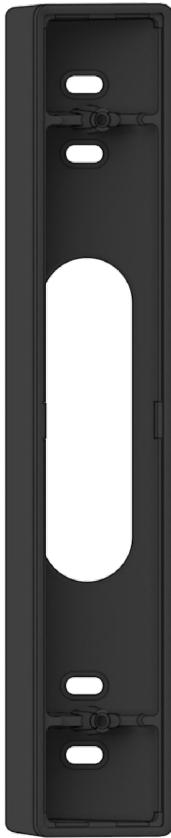


#6-32 Machine Screws (2 pcs)
Length: 25.4mm Drive: #2 Phillips



M3.5x0.6 Machine Screws (2 pcs)
Length: 8mm Drive: #2 Phillips



Wall Screws (2 pcs)
Length: 25.4 Drive: #2 Phillips



Wall Anchors (2 pcs)
Length: 25mm

ACC-INT-ANGLE-4 Angle Mount

What you'll need


- TD33 Video Intercom
- A #2 Phillips screwdriver or power drill with a #2 Phillips driver bit
- 1/4 inch (6.5mm) drill bit for wall anchors
- 1/8 inch (3mm) drill bit for pilot holes
- 7/8 inch (22mm) drill bit for pigtail pass throughs

Compatible Products

- TD33 Video Intercom

Introduction

Overview

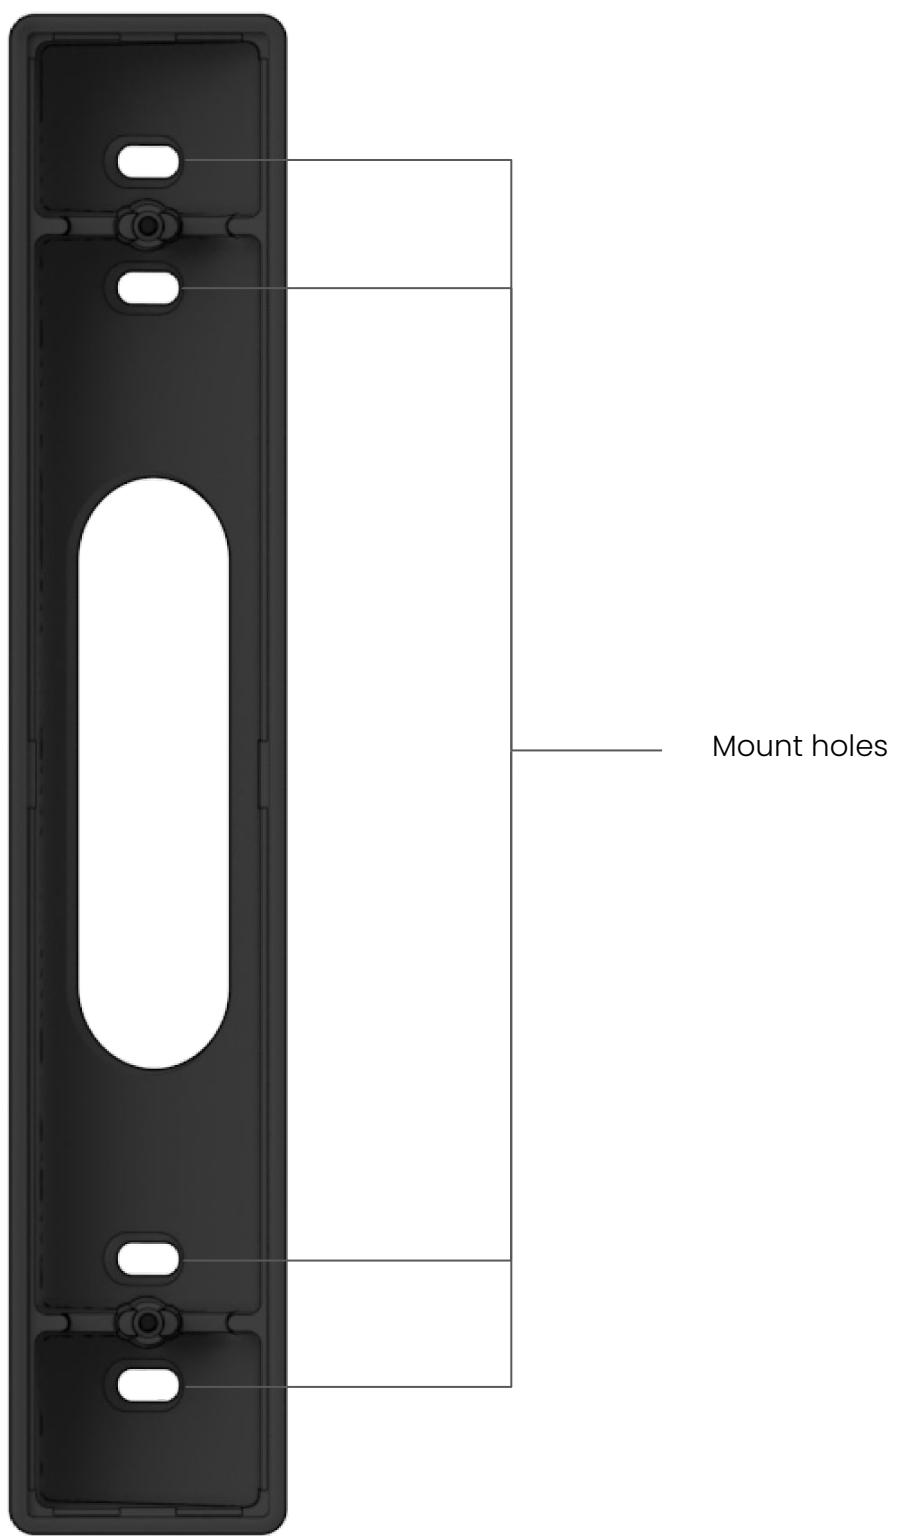

Installation


Mounting

Use the Angle Mount as a template to mark mounting holes and the pigtail passthrough hole. Either set of top and bottom holes can be used.

For the pigtail passthrough, drill a 7/8" (22mm) hole.

For a solid material like wood or metal, drill 1/8 inch (3mm) pilot holes. Drive mounting screws directly into the pilot holes through either set of holes on the Angle Mount.

For drywall, plaster or masonry, separate wall anchors may be required, drill 1/4" (6.5mm) pilot holes. Use the wall screws to secure the mount plate onto the wall.

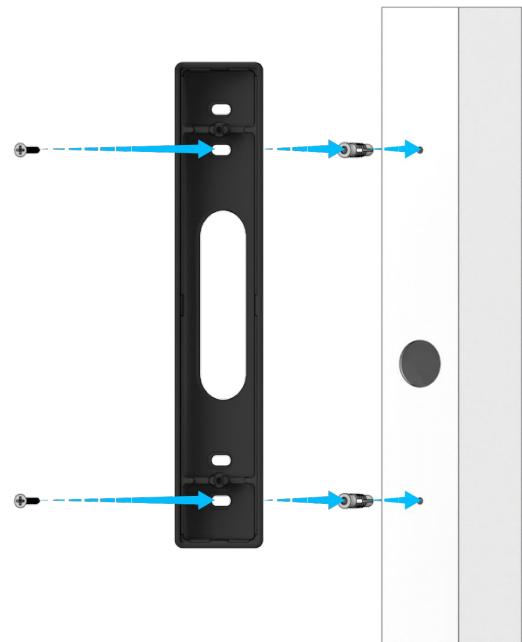


Feed Ethernet cable through the center of the Angle Mount before fully securing it to the mounting surface.

Attach the Mount Plate provided with TD33 Video Intercom to the Angle Mount using the Mount Plate Screws also provided with the Angle Mount

Leave enough slack to safely handle the TD33 Video Intercom during installation.

Refer to the Verkada TD33 Video Intercom Install Guide to complete mounting and wiring instructions.

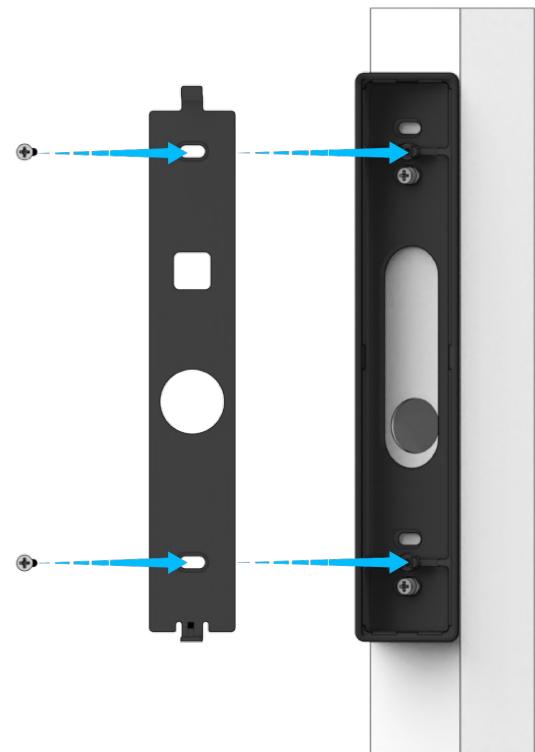

Installation

Secure

Guide the Intercom onto the hook on the top edge of the mount plate.

Feed the pigtail cables through the pigtail passthrough hole.

Gently swing the bottom edge of the intercom down, against the mount plate.



Secure the Intercom by tightening the T10 Security Torx screw at the bottom of the mount plate using the T10 Security Torx Screwdriver.



Appendix

Support

Thank you for purchasing this Verkada product. If for any reason you're experiencing issues or need assistance, please contact our 24/7 Technical Support Team immediately.

Sincerely,
The Verkada Team
verkada.com/support