

ACC-IOX-RELAY

Verkada Security Relay



Overview

The Verkada Security Relay simplifies intercom and access control installations by providing direct power to lock hardware, eliminating the need for an external power supply when devices are configured as door controllers. By moving sensitive circuitry to the secure interior side of the door, the security relay also protects against tampering and unauthorized entry if the exterior device is damaged.


The security relay is compatible with all Verkada intercoms and the AF64 Access Station Pro.

Tech specs

Dimensions	Length: 1.9in / 47.4mm Width: 1.2in / 31mm Height: 3.1in / 79.8mm	Box dimensions	Length: 3.9in / 100mm Width: 2.2in / 55mm Height: 5.1in / 130mm
Weight	0.2lb / 86g	Box weight	0.4lb / 180g
Material	Polycarbonate	Box includes	T10 security Torx hex key, mounting hardware kit, strain relief zip tie
Color	White	Operating temperature	-10 °C-50°C, 5-85% relative humidity
Power input	DC 10V - 13.6V	Inputs / outputs	2x Inputs 1x RS-485 1x 12V Out @ 0.5A
Power specs	0.18W standby, 20W max (0.015A - 1.67A @ 12DC input)	Relay output	1x wet relay with switch-selectable power: • 12VDC operation @ 0.75A max • 24VDC operation @ 0.5A max • Dry operation with 30VDC @ 1A max passthrough
Warranty	10 years	Compliance	FCC Part 15B Class B, ICES-003 Class B, CE, UKCA, VCCI, RCM, IK07, indoor use only
Mounting options	Wall, ceiling, or junction box	Availability	USA, CAN, UK, EU, AUS, NZ
Tamper detection	Yes		



Product dimensions

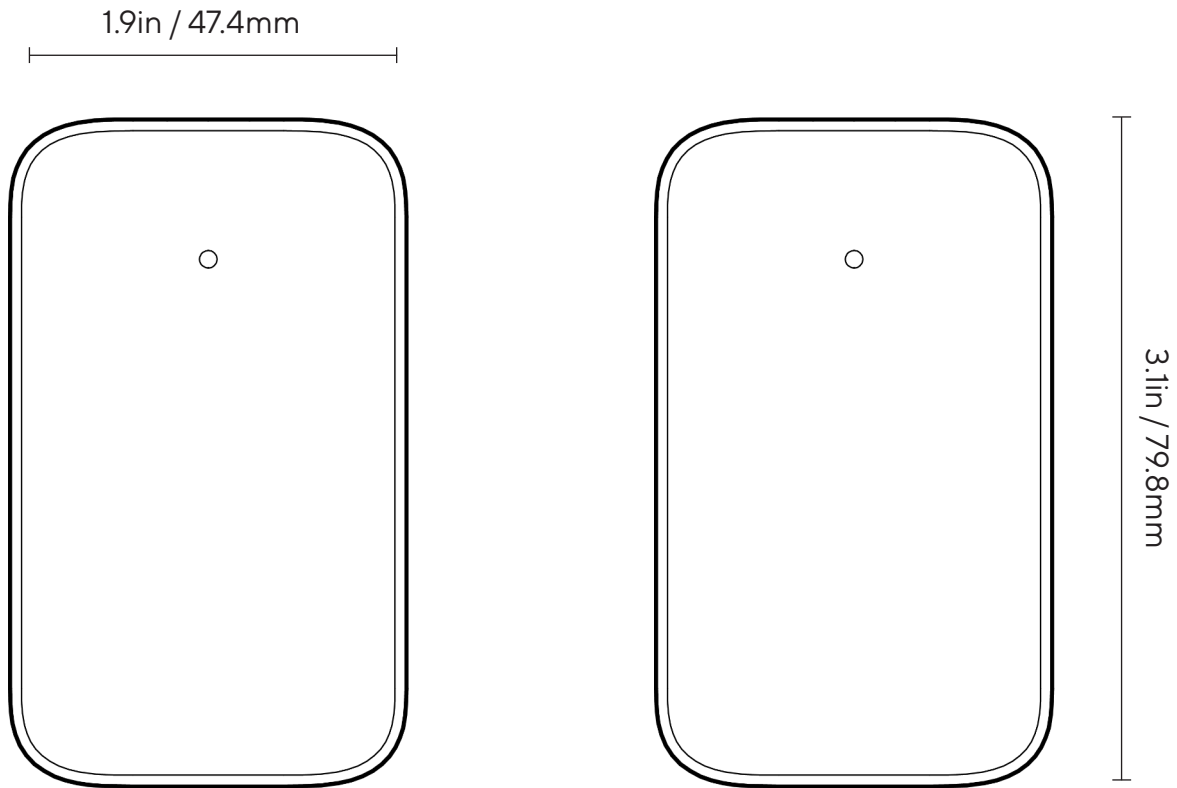



Ordering information

Verkada Security Relay pricing

Model number	Description	US cost (MSRP) ^{USD}	WW cost (MSRP) ^{USD}
ACC-IOX-RELAY	Verkada Security Relay	\$199	\$199
ACC-WA-30W-EU	Verkada 30W Wall Adapter, Europe	N/A	\$89
ACC-WA-30W-NA	Verkada 30W Wall Adapter, North America	\$89	\$89
ACC-WA-30W-UK	Verkada 30W Wall Adapter, United Kingdom	N/A	\$89