

LLMs versus the Halting Problem: Characterizing Program Termination Reasoning

Oren Sultan^{1,2*}, Jordi Armengol-Estapé¹, Pascal Kesseli¹, Julien Vanegue^{3,4}
Dafna Shahaf², Yossi Adi^{1†}, Peter O’Hearn^{1,5†}

¹Meta FAIR

²The Hebrew University of Jerusalem, Israel

³Bloomberg, New York, USA

⁴Imperial College London, UK

⁵University College London, UK

Abstract

Determining whether a program terminates is a central problem in computer science. Turing’s Halting Problem established termination as undecidable, showing that no algorithm can universally determine termination for all programs and inputs. Hence, verification tools approximate termination, sometimes failing to prove or disprove; these tools rely on problem-specific architectures and are usually tied to particular programming languages. Recent advances in LLMs raise a natural question: *To what extent can they reason about program termination?*

We evaluate frontier LLMs on a diverse set of C programs from the International Competition on Software Verification (SV-COMP) 2025. Our results show that GPT-5 and Claude Sonnet-4.5 achieve scores comparable to top-ranked verification tools (with test-time scaling). However, while models often correctly infer whether programs terminate, they frequently fail to construct a *witness* as formal proof, revealing a gap between semantic recognition and symbolic proof generation. Performance further degrades as code length increases. Beyond witness automaton graphs, we introduce a divergence-precondition formulation that characterizes non-termination conditions as logical constraints. We hope these findings motivate future research on real-world termination benchmarks, neuro-symbolic approaches that combine LLMs with symbolic verification methods, and, more broadly, LLM reasoning on other undecidable problems.

1 Introduction

Program termination is a central problem in computer science, demonstrated by the Halting Problem (Turing et al., 1936). The undecidability of the Halting Problem proves that no algorithm can universally determine whether a given program will

halt. Ensuring program termination is important for software reliability and safety (Avizienis et al., 2004). Non-termination may present a critical software defect that can lead to unbounded resource consumption, loss of system responsiveness, and severe failures in real-world deployments.

Despite the undecidability of the Halting Problem, a variety of verification tools have been proposed over the years to approximate termination analysis. State-of-the-art tools, such as UAutomizer (Heizmann et al., 2023) and PROTON (Metta et al., 2024), use automata over program statements or leverage symbolic execution via CBMC (Kroening and Tautschnig, 2014). These tools often rely on complex, multi-stage problem- and language-specific architectures (for example, see PROTON architecture in Figure 1).

Large Language Models (LLMs) have recently shown strong capabilities in code generation and reasoning (Zheng et al., 2023; Zhao et al., 2023; Liu et al., 2024; Jiang et al., 2024). Unlike traditional tools, LLMs can be integrated directly into the coding process, reason beyond surface-level syntax, and generalize across languages. We ask: *To what extent can frontier LLMs correctly predict whether a program terminates?* To answer this, we evaluate frontier LLMs on full SV-COMP termination tasks under machine-validated proof constraints.

Program termination is undecidable: proving it requires ruling out all infinite execution paths, not merely observing finite traces. Assessing termination requires LLMs to reason about program structure and control flow beyond pattern matching.

In this work, we assess the reasoning capabilities of LLMs on the International Competition on Software Verification (SV-COMP) 2025 Termination category¹ (Beyer, 2012). We cover both open-weights models, i.e., CWM (Copet et al., 2025) and Qwen3-32B (Yang et al., 2025) and proprietary

*Work done during an internship at Meta FAIR.

†Joint supervision.

¹The dataset is publicly available under the CC-BY-4.0.

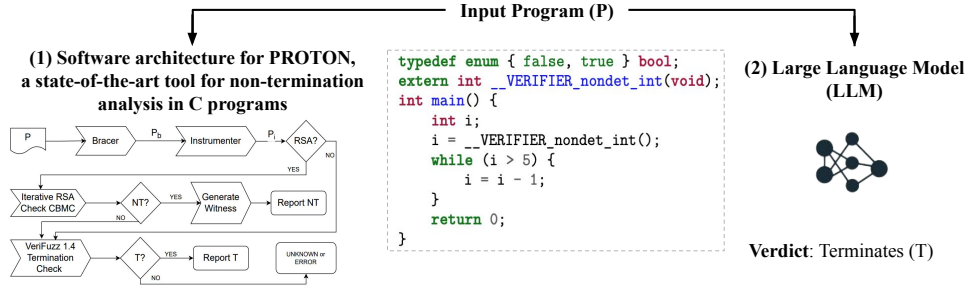


Figure 1: **Termination prediction task.** Given a program, the task is to predict whether the program halts for all inputs (instantiations of nondeterministic variables). (1) Traditional verification tools like PROTON use multi-component architectures for parsing, input augmentation, and tool-chain management (its architecture image reproduced from Metta et al. (2024) under Attribution 4.0 International License). (2) We investigate whether LLMs can match state-of-the-art verification tools, providing a simpler, language-agnostic solution, as illustrated in the example above where the LLM correctly predicts termination. For an example of non-termination see Figure 2.

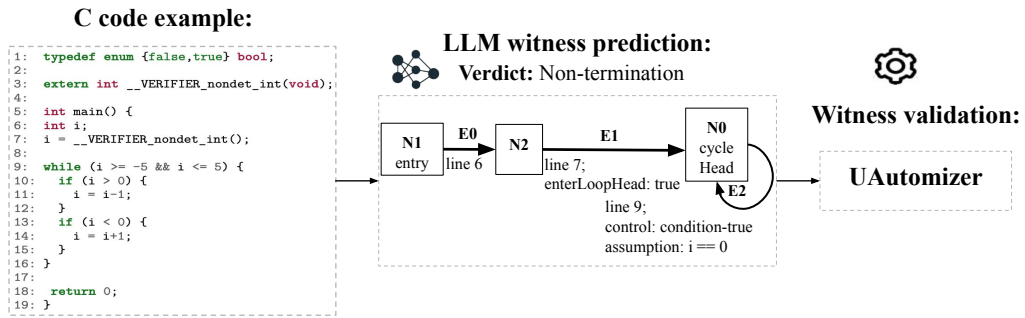


Figure 2: **LLM non-termination witness prediction.** Given a C program, an LLM that predicts non-termination must additionally output a **witness automaton** as a proof in JSON format (see Figure 8). The witness automaton models a potentially infinite execution: nodes correspond to program states and edges to transitions. The predicted JSON is converted to GraphML and validated by a **witness validator** (e.g., UAutomizer). The example illustrates a loop where i is initialized in $[-5, 5]$, eventually reaches 0 (see the *assumption* on edge E2), and executes indefinitely.

models, i.e., GPT-5 (OpenAI, 2025), Claude Sonnet 4.5 (Anthropic, 2025), and GPT-4o (Hurst et al., 2024), which serves as a non-reasoning baseline model. For a reference, we report results for the top three SV-COMP 2025 verification tools: PROTON (Metta et al., 2024), UAutomizer (Heizmann et al., 2023), and AProVE (Emrich et al., 2023).

Results indicate that GPT-5 and Claude Sonnet 4.5 trail only PROTON, the first-place tool. CWM ranks immediately behind UAutomizer, which finished second. Error analysis reveals a substantial classification-proof gap: while LLMs are often highly effective at predicting program termination, they frequently fail to construct verifier-valid witness automata for infinite execution paths. Additionally, their performance tends to degrade when handling longer, more complex code samples.

To further validate our findings, we analyze a subset of programs by prompting the model to specify a *precondition* (a logical formula) describing the input values that cause non-termination. This is

related to the concept of weakest precondition from program verification (Dijkstra, 1976). We believe that such divergence preconditions are simpler and more interpretable than SV-COMP witnesses.

Note that our goal is to evaluate current LLMs on program termination prediction, rather than optimize them for this task, propose a new termination-analysis algorithm, or design a new evaluation protocol. We intentionally adopt the existing, community-standard SV-COMP task definition, label space, witness format, and scoring scheme, since this enables reproducible evaluation and direct comparison against state-of-the-art termination analyzers. Our contribution is therefore best understood as a systematic empirical characterization of LLM termination reasoning under this established protocol, rather than a new benchmark or methodology; we discuss more realistic, LLM-specific termination benchmarks as an important direction for future work (Section 8). We believe that understanding these strengths and limitations can shed

light on the broader capabilities of LLMs for challenging computational reasoning tasks. We view program termination as a useful testbed for studying frontier LLM reasoning on undecidable semantic tasks, motivating future research on real-world termination benchmarks, neuro-symbolic systems that combine LLMs with symbolic verifiers, and reasoning about additional undecidable properties.

Termination is one instance of a large class of undecidable semantic program properties. By Rice’s Theorem (Rice, 1953), every non-trivial semantic property of programs is undecidable, including central verification tasks such as unreachability, memory safety, and program equivalence.

Our contributions are: (1) We present the first large-scale study of frontier LLM reasoning on full SV-COMP termination tasks, providing a new testbed for studying semantic reasoning on undecidable problems. (2) We show that frontier reasoning models approach specialized symbolic analyzers in prediction accuracy, while revealing a substantial gap between correct semantic prediction and valid symbolic proof construction. (3) We identify key failure modes of LLM reasoning: witness generation remains the primary bottleneck, performance degrades with code length, and errors concentrate in concurrency over standard control flow. (4) We introduce a domain witness formulation for non-termination, enabling a simpler and more interpretable analysis of model reasoning. (5) We release data and code at: https://github.com/orensul/LLMs_vs_Halting_Problem.

2 Problem Formulation

We follow the format specification of the SV-COMP Termination category, in which the **input** is a *C* program with one main function and possibly auxiliary helper functions. The program may include multiple non-deterministic variables, which can be assigned random values during execution. The **output** is a termination prediction. Specifically, we consider three possible predictions: (1) **T (Terminating)**, meaning the program terminates on all possible input values; (2) **NT (Non-Terminating)**, indicating the program diverges on some values and forms a non-termination loop. Here, the model is required to provide a *witness automaton*, which is a graph containing a cycle of valid states to demonstrate an infinite execution path within the program. Nodes correspond to program states; edges represent transitions. Importantly,

this path does not need to be fully explicit; the model is not required to specify the exact non-deterministic values chosen along the path. As a result, the model does not need to produce a concrete counterexample, but rather a valid infinite path through the program’s state space. This allows standard SV-COMP validators to confirm correctness in under a second. See Appendix E for details about UAutomizer, the witness validator we used, and Figure 2 for an example of LLM witness prediction. (3) **UNK (Unknown)** is returned when the model cannot determine the termination behavior.

3 Dataset

We use SV-COMP 2025, which is arguably the largest public collection of formal verification tasks, spanning six key properties for tool evaluation. We focus on the termination category, comprising a total of 2,328 tasks. These tasks are organized into four subcategories: BitVectors (bit-precise arithmetic), MainControlFlow (complex control flow such as loops and recursion), MainHeap (dynamic heap memory manipulation), and Other. Each subcategory presents distinct program analysis challenges. A detailed summary of these subcategories is provided in Table 9 in the Appendix. Each task in the dataset provides a *C* code and its expected verification result, i.e., whether the code terminates or not. The benchmarks range from synthetic cases targeting specific algorithms to real-world code. Figure 2 illustrates a non-termination sample from the SV-COMP dataset.

Dataset statistics. The dataset contains *C* programs of diverse lengths. Using the Instruct Llama3 tokenizer, we find that 90% of samples contain at most 20K tokens (median: 6K). See Appendix B for details. The dataset contains 2,328 samples, 65.6% labeled as Termination (T) and 34.4% as Non-termination (NT). This distribution is skewed toward terminating programs, reflecting typical real-world software; non-terminating cases often arise from unintended behaviors or bugs, which are also deliberately included in SV-COMP.

4 Experimental Setup

We provide a detailed description of the evaluation setup, covering model inference, evaluation methodology, and task-specific evaluation metrics.

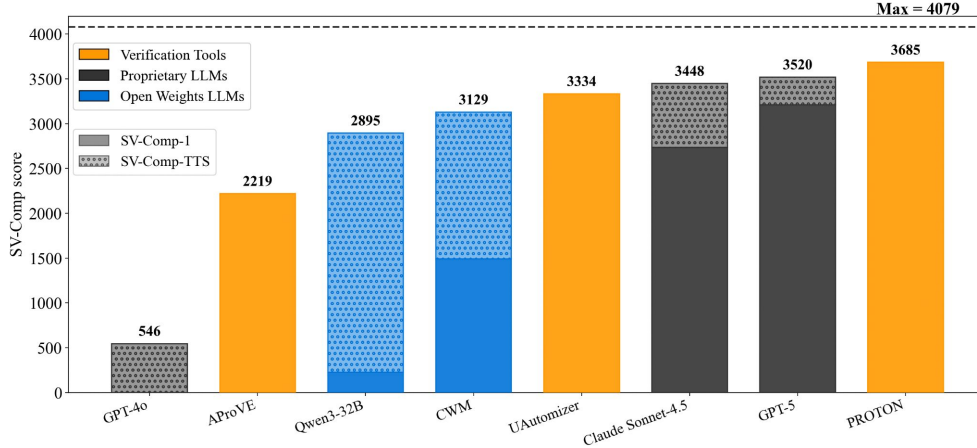


Figure 3: **SV-COMP main results.** Mean SV-COMP scores for LLMs (across 100 bootstraps), top SV-COMP 2025 verification tools, and the max possible scores (**minimum score is** $-50,064$). GPT-5 (TTS) and Claude Sonnet-4.5 (TTS) would place 2nd and 3rd (3,520 and 3,448), behind the gold medalist PROTON. CWM ranks just below UAutomizer. GPT-4o scores significantly lower: 546 with TTS, and a negative score without TTS ($-5,145$).

4.1 Model Inference

We evaluate CWM (Copet et al., 2025), Qwen3-32B (Yang et al., 2025), GPT-5 (OpenAI, 2025) and Claude Sonnet-4.5 (Anthropic, 2025), all in reasoning mode. We additionally evaluate GPT-4o (Hurst et al., 2024) as a strong baseline model with no reasoning capabilities.

Inference pipeline. Each model is prompted to generate a JSON object containing a verdict attribute: true for Termination (T), and false for Non-termination (NT). For NT cases, the model also outputs a witness attribute, which is a JSON graph (nodes are states in the program; edges the transitions between states) representing a potential infinite path. We use the same prompt across all models to ensure a controlled comparison. We deliberately avoid task-specific tuning (e.g., fine-tuning or prompt engineering) to reflect the models’ general performance. Despite the lack of task-specific tuning, models still achieve strong performance. See Figure D in the Appendix for the complete prompt provided to the model.

For a false *verdict* (NT), the LLM outputs a witness automaton graph in the *witness* JSON attribute. Predictions are schema-validated: nodes and edges must have unique ids and include required attributes (id, source, target, line², sourcecode). Duplicates or missing fields are treated as errors. These ensure that outputs are syntactically valid and schema-compliant before validation; most failures arise during downstream semantic validation rather than at this stage (see

²We add code line numbers supporting line prediction.

Prediction type	Score
Correct Termination (TN)	+2
Correct Non-termination (TP_valid_witness)	+1
Unknown	0
Correct Non-termination (TP_invalid_witness)	0
Incorrect Non-termination (FP)	-16
Incorrect Termination (FN)	-32

Table 1: **SV-COMP scoring per sample.** Non-termination (NT) is the positive class. For NT predictions, scores differ based on witness validity.

Section 5.2). See Figure 8 in Appendix for an example. Finally, we convert the validated JSON object into a GraphML, which is then processed by a witness validator. We use the UAutomizer (Heizmann et al., 2023), which symbolically checks the feasibility of the candidate infinite execution using an SMT solver. See Appendix E for details.

4.2 SV-COMP Score

The SV-COMP score averages performance across k categories with equal weight: $Score = \frac{1}{k} \sum_{i=1}^k \frac{s_i}{n_i} \left(\sum_{i=1}^k n_i \right)$, where s_i and n_i are the total score and number of samples in category i .

Scoring per sample. We use asymmetric scoring, following SV-COMP, with non-termination (NT) as the positive class. See Table 1 for the scoring criteria. This scheme prioritizes safety: FNs (misclassifying diverging programs as terminating) may lead to deploying software with infinite loops, risking system failures and resource exhaustion.

4.3 Evaluation

Bootstrap sampling. LLM outputs are inherently stochastic, so repeated runs may yield different predictions. To ensure a robust evaluation, we employ bootstrap sampling. For each instance, we aggregate results across 100 bootstrap runs.

SV-COMP-1. We generate 20 predictions per instance and randomly select one prediction from the 20 generated for each bootstrap iteration.

SV-COMP-TTS. To improve reliability and uncertainty estimates, we apply Test-Time Scaling (TTS) with Consensus Voting. For each instance, we randomly select $n = 10$ out of 20 predictions. If all sampled votes agree (considering T and NT, while ignoring unknown), we adopt the unanimous prediction. If there is any disagreement, we output unknown to reflect model uncertainty, reducing the risk of penalties from incorrect predictions.

We found $n = 10$ as a sweet spot for TTS, representing an optimal trade-off. Lower values of n make consensus easier and reduce unknown outputs, while higher values increase the likelihood of disagreement and thus more unknown predictions, which can lower the overall score.

Note that requiring agreement between all trajectories is a strict criterion that may lead to excessive unknown predictions and reduced overall score. Future work could explore alternative agreement thresholds to optimize performance.

F1 score. Beyond the SV-COMP score, we report per-class F1 scores to enable a more fine-grained analysis of model performance. Unknown predictions are considered mistakes.

Model hyperparameters. We configured each model using its official recommended settings. Top-p was set to 0.95. Temperatures are set to 1.0 (CWM, Claude), 0.6 (Qwen), and 0.7 (GPT-4o). GPT-5 does not support temperature; we use the default configuration with medium reasoning effort.

Compute considerations. Proprietary models are accessed via API, while open-weight models run on our internal GPUs under a fixed budget. We rely on official SV-COMP 2025 results (Beyer and Strejček, 2025), evaluated under fixed limits (15 min CPU, 4 cores, 15 GB RAM). Note that GPU/API inference is generally more expensive than the CPU-based alternatives; we focus on *absolute* performance rather than cost-normalized comparisons. The LLM and SV-COMP tool scores are therefore obtained under different computational conditions and are not directly cost-comparable; moreover, SV-COMP-

Model	F1 (T) ↑	F1 (NT) ↑
GPT-5 (TTS)	0.98	0.96
GPT-5	0.98	0.97
Claude S-4.5 (TTS)	0.94	0.89
Claude S-4.5	0.98	0.96
CWM (TTS)	0.84	0.63
CWM	0.91	0.80
Qwen3-32B (TTS)	0.83	0.59
Qwen3-32B	0.90	0.78
GPT-4o (TTS)	0.73	0.50
GPT-4o	0.73	0.49

Table 2: **LLMs F1 scores per class.** F1 (T) and F1 (NT) are averaged over 100 bootstrap runs. F1 decreases under TTS due to increased unknown predictions (counted as errors in F1). Rankings align with SV-COMP score.

TTS produces substantially more generations per instance than naive single-shot prediction. To make LLM inference cost concrete, we report LLM token consumption in Appendix I.

5 Results

5.1 Main Results

Results are presented in Figure 3. Under the TTS setup, all reasoning models show impressive SV-COMP scores. GPT-5 (3,520) and Claude Sonnet-4.5 (3,448) achieve scores in the range of the top SV-COMP tools, trailing only PROTON. CWM (3,129) and Qwen3-32B (2,895) follow, and do not exceed UAutomizer. GPT-4o, serving as a non-reasoning baseline, shows substantially lower performance. While all models benefit from TTS, this benefit is more pronounced in CWM, Qwen3-32B, and GPT-4o (e.g., Qwen SV-COMP-1 is 225 while its SV-COMP-TTS is 2,895). Interestingly, the gap is the smallest for GPT-5, implying better model calibration and robustness across predictions.

Beyond the main SV-COMP score, Table 2 reports per-class F1 scores for both T and NT. The F1 ranking closely matches the SV-COMP ranking, with GPT-5 performing best overall. F1 scores decrease under TTS because additional unknown predictions are neutral in SV-COMP scoring but treated as errors in F1. Standard deviations remain consistently low (< 0.1), indicating stable performance across runs. See Appendix K for details.

5.2 Analysis

Next, we evaluate models along four complementary axes, each targeting a distinct aspect of termination reasoning beyond overall SV-COMP score:

Model	P $\uparrow$	R $\uparrow$	V $\uparrow$
GPT-5	40.1%	40.7%	41.4%
Claude Sonnet-4.5	38.5%	39.9%	40.7%
CWM	28.5%	25.9%	30.6%
Qwen3-32B	22.6%	17.9%	24.8%
GPT-4o	20.8%	22.7%	27.3%

Table 3: **LLMs witness prediction (validated by UAutomizer) success rates.** Metrics: **P** (Precision): (%) of validated witness NT predictions out of all NT predictions; **R** (Recall): (%) of validated witness NT predictions out of all NT samples; **V** (Validity): (%) of validated witness NT predictions out of all correct NT predictions. GPT-5 and Claude lead in prediction rates, while CWM, GPT-4o, and Qwen3-32B perform lower, highlighting the challenge of generating a valid witness.

Model	Unk $\downarrow$	TTS-Unk $\downarrow$
GPT-5	0.5%	3%
Claude Sonnet-4.5	0.3%	8%
CWM	6%	22%
Qwen3-32B	2%	23%
GPT-4o	26%	30%

Table 4: **LLMs’ unknown prediction distribution.** **Unk:** (%) of unknown predictions, aggregated over 20 generations per entry. **TTS-Unk:** (%) of cases without unanimous agreement among 10 model predictions, resulting in an unknown. GPT-5 and Claude Sonnet-4.5 rarely predict unknown, while GPT-4o does so most often. For TTS-Unk, GPT-5 and Claude show high prediction unanimity, whereas CWM, Qwen3-32B, and GPT-4o show more disagreement, improving SV-COMP scores but lowering F1 scores.

(1) **witness validity**, which measures whether models can back a prediction with formally verifiable evidence, not just a correct label; (2) **Unknown rate (SV-COMP-1, TTS)**, which measures calibration, i.e., whether models abstain appropriately rather than guess; (3) **performance vs. code length**, using length as a proxy for reasoning complexity; and (4) **performance across SV-COMP subcategories**, which identifies which classes of termination problems remain most challenging.

Witness automaton prediction. Table 3 summarizes the results of witness automaton prediction, as validated by the UAutomizer witness validator. Performance is evaluated using three metrics, which correspond to the prediction types defined in Table 1. The first metric, Validity (V), measures the proportion of correct NT predictions that have a valid witness, relative to all *correct* NT predictions: $\text{Validity} = \frac{TP_{\text{valid}}}{TP_{\text{valid}} + TP_{\text{invalid}}}$. Similarly, Precision (P) and Recall (R) are defined as the proportion of cor-

rect NT predictions with a valid witness (out of all NT predictions in precision, and out of all NT samples in recall). Note that Precision and Recall also account for NT label prediction errors: false positives (FP) in Precision and false negatives (FN) in Recall, which are independent of whether the witness is valid. GPT-5 achieves the highest witness automaton validated predictions, with Claude performing similarly. CWM, GPT-4o, and Qwen3-32B exhibit lower performance, with CWM providing the best performance among the three.

To analyze failure modes, we distinguish between *formatting* errors (e.g., invalid schema or graph structure) and *content* errors. Formatting failures are relatively rare: GPT-5 and GPT-4o produce none, Qwen and Claude around 5%, and CWM around 25%. Most outputs successfully pass syntax validation, and failures are primarily content-related: witnesses are well-formed but rejected by the validator as semantically invalid.

This reveals a gap between semantic prediction and proof construction: models often predict non-termination correctly yet fail to produce valid witnesses. Similar gaps have been observed in theorem proving and mathematical reasoning, where models generate correct answers more reliably than verifier-valid derivations (Sultan et al., 2025). Motivated by this gap, we introduce an alternative witness format in Section 5.3.

Unknown prediction. Table 4 presents the results for unknown prediction considering both SV-COMP-1 and TTS. GPT-5 and Claude predict unknown least often, 0.5%, 0.3% respectively, followed by Qwen3-32B (2%) and CWM (6%). CWM’s higher unknown rate improves its SV-COMP-1 score compared to Qwen. GPT-4o predicts unknown much more frequently (26%), reflecting its difficulty with the classification task.

Under the TTS setup, GPT-5 and Claude have the lowest *unknown* rates (3% and 8%). These results are due to better consensus among model predictions, which implies better and more consistent model predictions. CWM, Qwen3-32B, and GPT-4o show less agreement, resulting in higher *unknown* rates, 22%, 23%, 30%, respectively.

Code input length. We analyze performance as a function of code complexity, using input length as a proxy (longer programs are typically more challenging). Figure 4 shows the mean SV-COMP score across three equal-size bins by input length (measured in tokens using the Instruct Llama3 tokenizer). Performance consistently decreases with

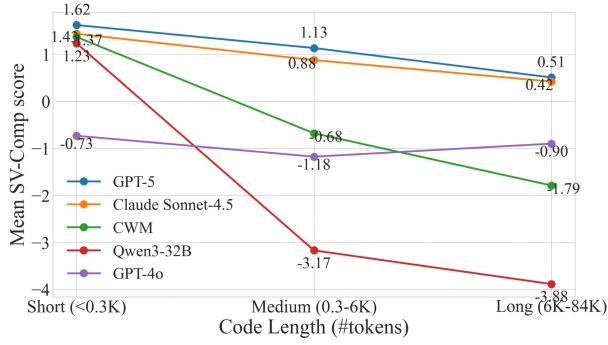


Figure 4: **LLMs mean SV-COMP score vs. code length.** Dataset examples are grouped into three *equal size* bins by code length (measured in tokens using Instruct Llama3 Tokenizer) (x axis). The mean SV-COMP score (y axis) per bin is shown for all models (20 predictions per sample). Scores decrease with code length; GPT-5 leads, followed by Claude and CWM.

length. GPT-5 achieves the highest scores across all bins, followed by Claude and CWM. In the medium and long bins, GPT-4o outperforms Qwen3-32B and matches CWM’s performance, although its scores are notably lower in the smallest bin. GPT-4o predicts a relatively high number of unknown outcomes, which helps reduce penalties for longer code inputs. Since code length is only a proxy for complexity (e.g., number of variables and control-flow depth), we do not claim it is causal. Rather, we report an empirical degradation consistent with similar length effects in multi-step mathematical reasoning. One possible explanation is that longer programs require globally consistent reasoning over richer control flow and larger state spaces.

Sub-category error rates. We analyze GPT-5, the top-performing model, and find that errors concentrate in multi-threaded programs, while simpler control-flow categories (e.g., loops, arrays, recursion) show near-zero failure rates. We report this as an empirical association rather than a causal explanation for why concurrency is harder, which we leave to future work. See Appendix G for details.

Evidence against data memorization. Several findings suggest that the results are unlikely to be explained by benchmark memorization. (1) Models recover non-termination domains in a novel witness format not available online (Section 5.3); (2) performance degrades with code length and complexity; (3) non-reasoning models perform substantially worse than reasoning-oriented models; and (4) anonymizing function and variable names does not affect performance (Appendix H).

Model	Domain W. $\uparrow$		SV-COMP W. $\uparrow$	
	P@1	P@3	P@1	P@3
Claude S-4.5	0.87	0.96	0.80	0.83
CWM	0.82	0.96	0.75	0.83
Qwen3-32B	0.85	0.94	0.77	0.83

Table 5: **LLMs performance per witness formats.** We report Mean Pass@1 and Pass@3 for correct witness predictions on 40 SV-COMP NT samples (10 generations each) on these short code samples. All models perform well, with higher accuracy for Domain W.

5.3 Precondition Prediction

Since the SV-COMP witness format is rather complex, we propose an interpretable alternative in which models are asked to directly output a logical expression over non-deterministic variables characterizing conditions for non-termination (e.g., $x < 0 \wedge y = 0$ indicates that the program diverges only when x is negative and y is zero).

To assess models’ ability to predict logical expressions representing non-termination (NT), we manually annotated 40 NT programs from the SV-COMP termination category. Each program is labeled with a logical expression for the NT domain. One annotator labeled all samples, while four others annotated a disjoint subset. Annotators were instructed to “*Read the C program and specify a logical expression over the non-deterministic variables characterizing inputs leading to non-termination.*” All annotators exhibited perfect agreement with the first annotator. We restrict to short programs with at most two non-deterministic variables, to keep annotation manageable and reliable; as a result, this base dataset contains simple, single-shot logical expressions over linear conditions.

Formalization. Let P be a program with non-deterministic input variables $X = (x_1, \dots, x_k)$. We restrict ourselves to programs whose non-determinism is fully captured by the finite set of integer variables X . Thus, fixing $X = x$ determines a single execution. More general settings involving, e.g., heap non-determinism or concurrency may admit multiple executions. We write $P(x) \uparrow$ if the execution of P under x does not terminate, and define the *divergence domain* as $D_P = \{x \in \mathbb{Z}^k : P(x) \uparrow\}$.

Definition 1 (Divergence Precondition). *A predicate φ over X is a sound divergence precondition for P if $\{x : \varphi(x)\} \subseteq D_P$ (every valuation satisfying φ diverges), and a complete divergence precondition if $\{x : \varphi(x)\} \supseteq D_P$ (every diverging*

valuation satisfies φ). We call φ an *exact divergence precondition*, or *domain witness*, if it is both, i.e., $\{x : \varphi(x)\} = D_P$.

D_P corresponds to the negation of the weakest precondition of Dijkstra (1976) with postcondition “true,” or equivalently, to the weakest precondition of a divergent Hoare triple (Raad et al., 2024).

Our ground-truth annotations target exact divergence preconditions, i.e., the *full* divergence domain D_P , not merely a sufficient condition for it. Since model predictions for NT domains may use different (syntactically) but equivalent logical expressions (e.g., $x < 10$ vs. $x \leq 9$), we score a prediction $\hat{\varphi}$ as correct iff it is logically equivalent to the ground truth φ^* , i.e., $\forall x. \hat{\varphi}(x) \leftrightarrow \varphi^*(x)$, which we check by testing the unsatisfiability of $\hat{\varphi} \oplus \varphi^*$ with the Z3 theorem prover (De Moura and Bjørner, 2008). A predicted $\hat{\varphi}$ that is sound but not complete (e.g., a strictly smaller subset of D_P) is therefore scored as incorrect under this exact-match criterion, even though it identifies a genuine, if partial, cause of non-termination.

Table 5 reports mean Pass@1 and Pass@3 (Chen, 2021) over the 40 annotated samples, with 10 predictions per sample. “Domain” denotes our proposed format, while “SV-COMP” uses the graph-based format. See Appendix J for the prompt. Both achieve high accuracy, but Domain consistently outperforms SV-COMP in Pass@1 and Pass@3, indicating stronger support for valid witness generation. It is also more interpretable.

Extension to Non-Linear Conditions. To test the domain-witness format under harder, non-linear divergence conditions, we add 40 NT programs from the SV-COMP *termination-nla* sub-category, involving polynomial terms (e.g., products and squares), and follow the same annotation protocol.

We evaluate Claude Sonnet-4.5, the strongest model on the original subset (Table 5), on this extension, using the same protocol: 10 generations per program, reporting Pass@1 and Pass@3; we restrict this extension to a single model, as our goal is a targeted stress test of the domain-witness format rather than a further cross-model comparison.

Table 6 reports the results: Claude Sonnet-4.5 achieves 76.7% Pass@1 and 86.5% Pass@3 on the non-linear subset, compared to 87.0% and 96.0% on the original linear subset. All predictions were syntactically valid logical expressions; the performance drop is entirely attributable to semantic errors, primarily omitting pre-loop input guards or

Subset	P@1 $\uparrow$	P@3 $\uparrow$
Linear (original, $n=40$)	0.87	0.96
Non-linear (extension, $n=40$)	0.77	0.87

Table 6: **Claude Sonnet-4.5 on linear vs. non-linear domain witnesses.** Mean Pass@1 and Pass@3 (10 generations per program) on the original linear subset and the non-linear (SV-COMP termination-nla).

predicting sound but incomplete subsets of the true divergence domain. Overall, performance remains strong despite the increased difficulty, indicating reasoning beyond simple linear cases. We release the extended benchmark, annotations, and evaluation code in our public codebase.

Examples of model witness outputs. We find that certain NT samples yield a valid domain witness format but not a valid graph-based format, and vice versa. This suggests that the two formats are complementary: errors in one format do not necessarily occur in the other. See Appendix L for examples of both formats, including one with the model’s reasoning process prior to its final answer.

6 Related Work

LLMs vs. classic reasoners. Kambhampati (2024) examines the capacity of LLMs for reasoning and planning, showing that they underperform classical planners on benchmarks from the International Planning Competition (Valmeekam et al., 2024). They argue that while LLMs may complement traditional planners through their language capabilities, they fall short in both accuracy and efficiency (Kambhampati et al., 2024). Similarly, Hazra et al. (2025) report that reasoning-oriented models yield improvements on SAT tasks but still do not reach the performance of classical solvers. In the context of theorem proving, prior work mostly integrates LLMs with symbolic reasoning systems such as Lean, SMT solvers, and first-order logic provers-where LLMs generate candidate proofs that are verified by symbolic tools, improving performance and reliability (Sultan et al., 2025; Trinh et al., 2024; Mirzadeh et al., 2024; Régim et al., 2024; Szeider, 2024; Olausson et al., 2023). In contrast, we evaluate the standalone ability of LLMs to reason about program termination, noting that practical systems should pair them with symbolic proof checkers.

Termination analysis using LLMs. Most prior work has focused on predicting program inputs and

outputs (Gu et al., 2024; Xu et al., 2025). Recent studies show that jointly training models to predict code and execution traces improves code generation (Armengol-Estapé et al., 2025), and that learning code world models further extends this capability (Copet et al., 2025). Termination prediction goes beyond execution, requiring reasoning about the existence of non-terminating behaviors. Another line of work uses LLMs to synthesize termination arguments, such as ranking functions (Kamath et al., 2024), but, to our knowledge, does not address non-termination witnesses. Alon and David (2022) apply GNNs to termination reasoning, using timeouts as a heuristic proxy for non-termination. More recently, Copet et al. (2025) evaluate CWM and Qwen3 on a simplified subset of translated Python functions from SV-COMP and TPDB,³ showing strong performance.

Termination analysis tools. In SV-COMP 2025, the leading systems are PROTON (Metta et al., 2024) and UAutomizer (Heizmann et al., 2023). PROTON uses CBMC (Kroening and Tautschnig, 2014) to soundly detect NT via recurrent loop states and generate witnesses, and falls back on high-confidence termination checks from VeriFuzz (Metta et al., 2023). UAutomizer encodes programs as automata and applies SMT-based refinement to eliminate infeasible paths. SV-COMP tools typically target small, self-contained programs. In contrast, Raad et al. (2024) study repository-level termination over millions of lines of code using recurrent sets (Gupta et al., 2008), bi-abduction (Calcagno et al., 2011), and underapproximation (O’Hearn, 2020).

7 Discussion

Decidable vs. Undecidable problems. As discussed in Section 6, LLMs underperform classical solvers on decidable tasks such as SAT and propositional planning. Interestingly, our results suggest that frontier LLMs can achieve competitive empirical performance with specialized tools on practical termination benchmarks, a task that is theoretically more challenging due to its undecidability. This discrepancy may be partly attributable to differences in benchmark construction: SAT and planning competition benchmarks are largely synthetically generated, whereas SV-COMP has evolved through community contributions. As a result, SV-COMP more closely reflects naturally occurring

verification problems rather than being explicitly designed to be adversarial. Additionally, undecidable problems depend on heuristic reasoning rather than exhaustive search, making them potentially a more natural fit for LLMs.

Beyond SV-COMP. SV-COMP remains the most comprehensive and challenging benchmark for termination analysis. Prior work focused on less-challenging benchmarks, e.g., on Python programs translated from TPDB (Copet et al., 2025). However, we believe that making LLMs useful for program termination requires extending to even more challenging settings, and that the ultimate assessment of the practical utility of LLMs in termination analysis should derive from deployment on real-world codebases (e.g., within continuous integration). In practical deployments, automatic termination reasoning must handle a continual stream of previously unseen problems and meet the accuracy requirements of real-world engineering.

8 Conclusions and Future Work

We studied whether frontier LLMs can reason about program termination competitively with state-of-the-art verification tools on the SV-COMP benchmark. We empirically show strong performance of LLMs – GPT-5 and Claude Sonnet-4.5 (with TTS) achieve performance close to the top-ranked verifier PROTON, while CWM performs close to UAutomizer. Across all models, performance degrades as code length increases, and witness generation remains a notable challenge.

To address this gap, we introduced a divergence-precondition formulation that characterizes non-termination conditions as logical constraints. Notably, LLMs predict these preconditions through prompting, whereas classical verifiers designed for binary termination decisions do not support this related task out of the box, highlighting the flexibility of LLM-based program analysis.

More broadly, our work highlights program termination as a useful testbed for understanding the strengths and limitations of frontier LLM reasoning, particularly the emerging gap between semantic recognition and formally verifiable reasoning.

In the future, we plan to construct challenging real-world termination benchmarks, explore neuro-symbolic approaches that combine LLMs with symbolic verifiers, and extend this line of research to additional undecidable reasoning problems.

³<https://github.com/TermCOMP/TPDB>

Limitations

- **Programming Language.** Our evaluation focuses on SV-COMP, which consists exclusively of *C* programs. Notably, prior work suggests that LLM-based termination reasoning can transfer across languages, e.g., to Python programs translated from TPDB (Copet et al., 2025).
- **Proprietary LLM (OpenAI GPT-5).** GPT-5 achieves the best performance across models. While this model delivers strong performance, its architecture, training data, and training methodology are proprietary.
- **LLMs are sensitive to prompt phrasing.** LLMs are sometimes sensitive to small changes to the prompts. We acknowledge that results may vary with different prompts. We note that we use a simple standardized prompt without benchmark-specific tuning to avoid overfitting. Despite this minimal setup, models achieve competitive performance.
- **Lab versus competition conditions.** The LLM results reported on in this work were not from official entry to the SV-COMP competition, and exact competition conditions cannot be guaranteed, and this could affect comparison to the scores of SV-COMP entrants. We expect that our LLM results are conservative, as we use one witness validator rather than many. This work was completed after the deadline for SV-COMP 2026; perhaps LLM entries could participate in SV-COMP 2027.
- **Compute comparability.** LLM inference (API calls, or GPU inference for open-weight models) and the CPU-bound SV-COMP verification tools are evaluated under different computational conditions and are not directly cost-comparable; SV-COMP-TTS additionally requires multiple LLM generations per instance. We report token consumption per model as a reproducible, hardware-independent proxy for LLM inference cost (Appendix I).
- **Robustness evaluation.** We leave a more systematic robustness evaluation under semantics-preserving transformations, adversarial rewrites, and procedurally generated benchmarks to future work. Consequently, our findings should primarily be interpreted

as a behavioral characterization of current frontier LLMs on SV-COMP-style termination tasks rather than definitive evidence of general semantic reasoning capabilities.

Ethical Considerations

AI Assistants. We used AI assistants for coding support, writing, and rephrasing. All AI-generated outputs were carefully reviewed and edited to ensure alignment with our design goals and to preserve the original intent of our work.

Acknowledgments

We thank Ori Yoran for his valuable feedback, as well as the whole CodeGen team at Meta FAIR for helpful discussions. We thank Marco Selvi and Kunhao Zheng for the initial integration of the UAutomizer witness checker.

References

- Yoav Alon and Cristina David. 2022. [Using graph neural networks for program termination](#). In *Proceedings of the 30th ACM Joint European Software Engineering Conference and Symposium on the Foundations of Software Engineering, ESEC/FSE 2022, Singapore, Singapore, November 14-18, 2022*, pages 910–921. ACM.
- Anthropic. 2025. [Claude sonnet 4.5](#).
- Jordi Armengol-Estapé, Quentin Carbonneaux, Tianjun Zhang, Aram H Markosyan, Volker Seeker, Chris Cummins, Melanie Kambadur, Michael FP O’Boyle, Sida Wang, Gabriel Synnaeve, et al. 2025. What i cannot execute, i do not understand: Training and evaluating llms on program execution traces. *arXiv preprint arXiv:2503.05703*.
- Algirdas Avizienis, J-C Laprie, Brian Randell, and Carl Landwehr. 2004. Basic concepts and taxonomy of dependable and secure computing. *IEEE transactions on dependable and secure computing*, 1(1):11–33.
- Dirk Beyer. 2012. Competition on software verification: (sv-comp). In *International Conference on Tools and Algorithms for the Construction and Analysis of Systems*, pages 504–524. Springer.
- Dirk Beyer and Jan Strejček. 2025. Improvements in software verification and witness validation: Sv-comp 2025. In *International Conference on Tools and Algorithms for the Construction and Analysis of Systems*, pages 151–186. Springer.
- Cristiano Calcagno, Dino Distefano, Peter W. O’Hearn, and Hongseok Yang. 2011. [Compositional shape analysis by means of bi-abduction](#). *J. ACM*, 58(6):26:1–26:66.

- Mark Chen. 2021. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*.
- Jade Copet, Quentin Carbonneaux, Gal Cohen, Jonas Gehring, Jacob Kahn, Jannik Kossen, Felix Kreuk, Emily McMillin, Michel Meyer, Yuxiang Wei, et al. 2025. Cwm: An open-weights llm for research on code generation with world models. *arXiv preprint arXiv:2510.02387*.
- Leonardo De Moura and Nikolaj Bjørner. 2008. Z3: An efficient smt solver. In *International conference on Tools and Algorithms for the Construction and Analysis of Systems*, pages 337–340. Springer.
- Edsger W. Dijkstra. 1976. *A Discipline of Programming*. Prentice Hall, Englewood Cliffs, NJ.
- Frank Emrich, Jera Hensel, and Jürgen Giesl. 2023. Aprove: Modular termination analysis of memory-manipulating c programs. *arXiv preprint arXiv:2302.02382*.
- Alex Gu, Baptiste Rozière, Hugh James Leather, Armando Solar-Lezama, Gabriel Synnaeve, and Sida Wang. 2024. [Cruxeval: A benchmark for code reasoning, understanding and execution](#). In *Forty-first International Conference on Machine Learning, ICML 2024, Vienna, Austria, July 21-27, 2024*. Open-Review.net.
- Ashutosh Gupta, Thomas A. Henzinger, Rupak Majumdar, Andrey Rybalchenko, and Ru-Gang Xu. 2008. [Proving non-termination](#). In *Proceedings of the 35th ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages, POPL 2008, San Francisco, California, USA, January 7-12, 2008*, pages 147–158. ACM.
- Rishi Hazra, Gabriele Venturato, Pedro Zuidberg Dos Martires, and Luc De Raedt. 2025. [Have large language models learned to reason? A characterization via 3-sat phase transition](#). *CoRR*, abs/2504.03930.
- Matthias Heizmann, Max Barth, Daniel Dietsch, Leonard Fichtner, Jochen Hoenicke, Dominik Klumpp, Mehdi Naouar, Tanja Schindler, Frank Schüssele, and Andreas Podelski. 2023. Ultimate automizer and the commuhash normal form: (competition contribution). In *International Conference on Tools and Algorithms for the Construction and Analysis of Systems*, pages 577–581. Springer.
- Aaron Hurst, Adam Lerer, Adam P Goucher, Adam Perelman, Aditya Ramesh, Aidan Clark, AJ Ostrow, Akila Welihinda, Alan Hayes, Alec Radford, et al. 2024. Gpt-4o system card. *arXiv preprint arXiv:2410.21276*.
- Juyong Jiang, Fan Wang, Jiasi Shen, Sungju Kim, and Sunghun Kim. 2024. A survey on large language models for code generation. *arXiv preprint arXiv:2406.00515*.
- Adharsh Kamath, Nausheen Mohammed, Aditya Senthilnathan, Saikat Chakraborty, Pantazis Deligianis, Shuvendu K. Lahiri, Akash Lal, Aseem Rastogi, Subhajit Roy, and Rahul Sharma. 2024. [Leveraging llms for program verification](#). In *Formal Methods in Computer-Aided Design, FMCAD 2024, Prague, Czech Republic, October 15-18, 2024*, pages 107–118. IEEE.
- Subbarao Kambhampati. 2024. Can large language models reason and plan? *Annals of the New York Academy of Sciences*, 1534(1):15–18.
- Subbarao Kambhampati, Karthik Valmeekam, Lin Guan, Mudit Verma, Kaya Stechly, Siddhant Bhambri, Lucas Paul Saldyt, and Anil B Murthy. 2024. Position: Llms can’t plan, but can help planning in llm-modulo frameworks. In *Forty-first International Conference on Machine Learning*.
- Daniel Kroening and Michael Tautschnig. 2014. Cbmc–c bounded model checker: (competition contribution). In *International Conference on Tools and Algorithms for the Construction and Analysis of Systems*, pages 389–391. Springer.
- Aixin Liu, Bei Feng, Bing Xue, Bingxuan Wang, Bochao Wu, Chengda Lu, Chenggang Zhao, Chengqi Deng, Chenyu Zhang, Chong Ruan, et al. 2024. Deepseek-v3 technical report. *arXiv preprint arXiv:2412.19437*.
- Ravindra Metta, Hrishikesh Karmarkar, Kumar Madhukar, R Venkatesh, and Supratik Chakraborty. 2024. Proton: probes for termination or not (competition contribution). In *International Conference on Tools and Algorithms for the Construction and Analysis of Systems*, pages 393–398. Springer.
- Ravindra Metta, Prasanth Yeduru, Hrishikesh Karmarkar, and Raveendra Kumar Medicherla. 2023. Verifuzz 1.4: Checking for (non-) termination (competition contribution). In *International Conference on Tools and Algorithms for the Construction and Analysis of Systems*, pages 594–599. Springer.
- Iman Mirzadeh, Keivan Alizadeh, Hooman Shahrokhi, Oncel Tuzel, Samy Bengio, and Mehrdad Farajtabar. 2024. Gsm-symbolic: Understanding the limitations of mathematical reasoning in large language models. *arXiv preprint arXiv:2410.05229*.
- Peter W. O’Hearn. 2020. [Incorrectness logic](#). *Proc. ACM Program. Lang.*, 4(POPL):10:1–10:32.
- Theo X Olausson, Alex Gu, Benjamin Lipkin, Cedegao E Zhang, Armando Solar-Lezama, Joshua B Tenenbaum, and Roger Levy. 2023. Linc: A neurosymbolic approach for logical reasoning by combining language models with first-order logic provers. *arXiv preprint arXiv:2310.15164*.
- OpenAI. 2025. [Gpt-5](#).
- Azalea Raad, Julien Vanegue, and Peter W. O’Hearn. 2024. [Non-termination proving at scale](#). *Proc. ACM Program. Lang.*, 8(OOPSLA2):246–274.

Florian Régim, Elisabetta De Maria, and Alexandre Bonlarron. 2024. Combining constraint programming reasoning with large language model predictions. *arXiv preprint arXiv:2407.13490*.

Henry Gordon Rice. 1953. Classes of recursively enumerable sets and their decision problems. *Transactions of the American Mathematical society*, 74(2):358–366.

Oren Sultan, Eitan Stern, and Dafna Shahaf. 2025. Towards reliable proof generation with llms: A neuro-symbolic approach. *arXiv preprint arXiv:2505.14479*.

Stefan Szeider. 2024. Mcp-solver: Integrating language models with constraint programming systems. *arXiv preprint arXiv:2501.00539*.

Trieu H Trinh, Yuhuai Wu, Quoc V Le, He He, and Thang Luong. 2024. Solving olympiad geometry without human demonstrations. *Nature*, 625(7995):476–482.

Alan Mathison Turing et al. 1936. On computable numbers, with an application to the entscheidungsproblem. *J. of Math*, 58(345-363):5.

Karthik Valmeekam, Kaya Stechly, and Subbarao Kambhampati. 2024. [LLMs still can’t plan; can llms? A preliminary evaluation of openai’s o1 on planbench](#). *CoRR*, abs/2409.13373.

Ruiyang Xu et al. 2025. Cruxeval-x: A benchmark for multilingual code reasoning, understanding and execution. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 23762–23779.

An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, et al. 2025. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*.

Wayne Xin Zhao, Kun Zhou, Junyi Li, Tianyi Tang, Xiaolei Wang, Yupeng Hou, Yingqian Min, Beichen Zhang, Junjie Zhang, Zican Dong, et al. 2023. A survey of large language models. *arXiv preprint arXiv:2303.18223*, 1(2).

Zibin Zheng, Kaiwen Ning, Yanlin Wang, Jingwen Zhang, Dewu Zheng, Mingxi Ye, and Jiachi Chen. 2023. A survey of large language models for code: Evolution, benchmarking, and future trends. *arXiv preprint arXiv:2311.10372*.

A Reproducibility

The SV-COMP dataset we used is available at: <https://gitlab.com/sosy-lab/sv-comp/bench-defs>. To obtain the benchmarks, clone the repository. Then, checkout the *svcomp25* tag and initialize submodules (including *sv-benchmarks*). Repository versions used in the competition are

listed in Table 4 of the report: https://doi.org/10.1007/978-3-031-90660-2_9. Benchmarks are organized by property (e.g., *Termination*), with sub-categories. We followed the official instructions and excluded 11 invalid tasks (9 from “Main-ControlFlow”, 2 from “Other”), resulting in 2,328 samples.

B Dataset Statistics

SV-COMP Termination Sub-categories. See sub-categories summarization in Table 9.

Length distribution. The dataset exhibits significant variability in code length: token counts range from 45 to 96,827, with a mean of $\mu = 6,080$ and a standard deviation of $\sigma = 10,898$. See Figure 5 for the code length histogram.

C SV-COMP Witness

According to the SV-COMP specification, when a non-termination is predicted, a witness must be provided to encode the proof as a graph structure. In this graph, nodes represent distinct program states, each assigned a unique id. Nodes may also include special attributes such as entry (marking the entry point) or cyclehead (indicating the head of a cycle). Edges denote transitions between states, corresponding to lines of code. Each edge includes its own id, the relevant source code line, the source and target node IDs, the actual sourcecode line, and any special properties (e.g., *enterLoopHead*, *control*, *assumption*).

To generate this witness, we prompt the LLM to produce a JSON object that encodes the graph. This JSON is subsequently converted to a GraphML file and validated using a dedicated verifier tool. For a visual illustration, refer to Figure 8.

D SV-COMP Prompt

See Figure 6 for a detailed description of the prompt provided to the LLM, including the termination analysis task instructions and the requirements for witness proofs in SV-COMP format for non-termination predictions. See Figure 7 for few-shot examples given to the LLM. These include one example demonstrating non-termination and another demonstrating termination.

E UAutomizer Witness Validator

Ultimate Automizer (UAutomizer) is a powerful verification tool capable of both producing and validating witnesses for program verification tasks. As

a witness validator, UAutomizer checks whether a given witness automaton (encoded in GraphML) correctly describes a feasible error path (violation witness) or a proof of correctness (correctness witness) for a program and its specification.

Validation workflow. UAutomizer requires the program source file (e.g., *test.c*), the specification file (in our task, *./properties/termination.prp*), the witness automaton in GraphML format (e.g., *witness.graphml*), and the architecture (32 or 64 bit).

Command-line invocation.

```
./Ultimate.py \
  --architecture 32bit \
  --spec PropertyUnreachCall.prp \
  --file test.c \
  --validate witness.graphml
```

Validation mechanism. UAutomizer parses the witness automaton (GraphML) and interprets its nodes and edges according to the witness specification. It simulates program execution, guided by the automaton. It checks whether its error path corresponds to a feasible program execution that violates the specification.

Result interpretation. If UAutomizer finds a matching error path, it outputs FALSE, meaning the witness is validated and the program violates the specification as described. If no such path exists, or the automaton does not match the program, it outputs TRUE, meaning the witness is rejected.

Interpreting the witness automaton. UAutomizer expects the witness automaton to be encoded in GraphML, with nodes representing control states and edges representing transitions. It reads <data> elements attached to nodes and edges, which encode information such as entry/sink/violation states, invariants, assumptions, source code locations, and thread information. The automaton must include specification and architecture information, allowing UAutomizer to match the witness to the correct verification context. See <https://github.com/sosy-lab/sv-witnesses/blob/main/README-GraphML.md> for reference.

F Code Length Error Analysis

One of the key questions in our error analysis is whether longer code snippets are associated with a higher rate of mistakes across models. Table 8 reports the mean code length for each prediction

outcome. Our results show that incorrect predictions (false negatives and false positives) are indeed linked to longer inputs, while correct predictions (true positives and true negatives) are more common for shorter code snippets. Additionally, unknowns and unconfirmed witnesses are also associated with longer code, suggesting that models are more likely to abstain from answering when confronted with complex or lengthy programs.

G Sub-categories Error Rates Analysis

We analyze GPT-5, the best-performing model. Errors are concentrated in a few subcategories. While openssl-simplified (100%) and ldv-sets (60%) exhibit the highest failure rates, they represent very small portions of the dataset. In contrast, multi-threaded programs (e.g., seq-mthreaded, ~6%) remain a primary weakness, with a high failure rate (15%) dominated by false positives. Additional challenges appear in systemc (~2.5%, 7.9%, mainly parsing failures) and heap-based programs (e.g., linked lists, ~0.7%, 5.9%), an association we take as suggestive, not explanatory, of difficulties with input structure and memory reasoning. In contrast, product-lines, the largest subcategory (~26%), has a low failure rate (1.3%), and simpler control-flow categories (loops, arrays, recursion) show near-zero failure rates.⁴

H Data Contamination Analysis

We provide several pieces of evidence suggesting contamination is unlikely:

Capability gap. Non-reasoning models (e.g., GPT-4o) perform substantially worse than reasoning models (Figure 3), and smaller models frequently predict Unknown (Table 4), indicating reliance on reasoning rather than lookup.

Difficulty sensitivity. Performance degrades with program complexity (Figure 4), inconsistent with memorization.

Witness validity. Even correct predictions often produce invalid witnesses (Table 3), suggesting incomplete reasoning rather than retrieval.

Out-of-distribution signal. Models recover non-termination domains in a novel format not available online (Section 5.3).

⁴See the SV-Benchmarks repository for subcategory details: <https://gitlab.com/sosy-lab/benchmarking/sv-benchmarks/-/tree/main/c/>.

Cross-benchmark robustness. On Halteval-Prelim (Copet et al., 2025), reasoning models outperform non-reasoning models, with no degradation from identifier anonymization.

I Compute Cost Analysis

We measure prompt and output token consumption for each evaluated model across the full SV-COMP benchmark (2,328 instances $\times$ 20 generations = 46,560 predictions per model). Prompt tokens correspond to the complete model input (system prompt, task instructions, and input C program), measured using each model’s native tokenizer. Output tokens include all generated tokens available in the inference logs, i.e., reasoning traces (when exposed by the model) plus the final answer.

Average prompt lengths range from 9.2K-11.0K tokens across tokenizers, while outputs vary substantially: Claude Sonnet-4.5, CWM, and Qwen3-30B average 1.37K, 1.47K, and 1.12K tokens per instance, respectively, versus 200 for the non-reasoning GPT-4o. We report token consumption as a reproducible, hardware-independent measure of inference cost, though it is not directly comparable to the CPU-bound SV-COMP tools (Table 7).

Witness validator scope. As stated in Appendix K and in Limitations, we validate witnesses using only the UAutomizer validator, whereas the official SV-COMP competition accepts a witness if validated by *any* of several validators. Our reported LLM scores are therefore a conservative (stricter) lower bound relative to what an official SV-COMP entry would likely achieve.

J Domain Witness Prompt

See Figure 9 for a detailed description of the prompt provided to the LLM for the domain prediction witness settings.

K Main Results

See Table 10 for the main results of LLM evaluation in SV-COMP 2025. The table reports mean scores and standard deviations across 100 bootstrap runs. Notably, the standard deviation for F1 scores across models is consistently low, which indicates stable classification performance, particularly for top-performing LLMs. In contrast, SV-COMP score standard deviations span a much wider range, from 47 up to 750. While leading models demonstrate robust and consistent SV-COMP results with lower variability, mid-tier and baseline

models exhibit greater fluctuations and less reliable verification performance.

Notice, in SV-COMP 2025, multiple witness validators are used, and a prediction is accepted if any of them validates it. We consider the UAutomizer validator only, uautomizer, making the LLM’s evaluation *stricter* and possibly yielding a lower scores compared to the official competition score.

L Model Witness Responses Examples

In Section 5.3, we sampled 40 short code snippet examples from the svcomp dataset and evaluated several LLMs, generating 10 predictions per sample. Our results indicate that LLMs demonstrate strong performance in both the graph-based witness format and the domain witness format. This is expected, as this subset of code examples consists of relatively easy cases. Notably, LLMs consistently achieve higher accuracy in the domain witness format. Interestingly, we observed instances where predictions were correct in the domain witness format but incorrect in the automaton (graph) witness format. These findings suggest that the domain witness and automaton (graph) witness formats are complementary; a mistake in one format does not necessarily imply a mistake in the other. We present examples of CWM predictions. Both domain and graph-based witness predictions are correct (see Figure 10). Domain witness prediction is incorrect, but graph-based prediction is correct (see Figure 11). Domain witness prediction is correct, but graph-based prediction is incorrect (see Figure 12). Lastly, we include another example of correct domain witness prediction, with the goal of showing how the natural language reasoning is align and reflect the final answer (Figure 13).

Model	Tokenizer	Prompt		Output	
		Mean	Med.	Mean	Med.
Claude Sonnet-4.5	Anthropic*	10,497	2,640	1,373	1,413
GPT-5	o200k_base	9,324	2,429	130**	9**
GPT-4o	o200k_base	9,324	2,429	200	169
CWM	Llama-3	9,233	2,373	1,474	1,886
Qwen3-30B	Qwen	11,009	2,467	1,125	884

Table 7: **Token consumption per model, main SV-COMP evaluation.** Prompt and output token counts (mean, median) per generation, aggregated over the full benchmark. *Anthropic does not publicly release the Claude 4.x tokenizer; Anthropic token counts are estimated using LiteLLM’s tokenizer approximation. **GPT-5 (medium reasoning effort) does not expose its hidden reasoning tokens through the API, so its reported output length undercounts total generated tokens.

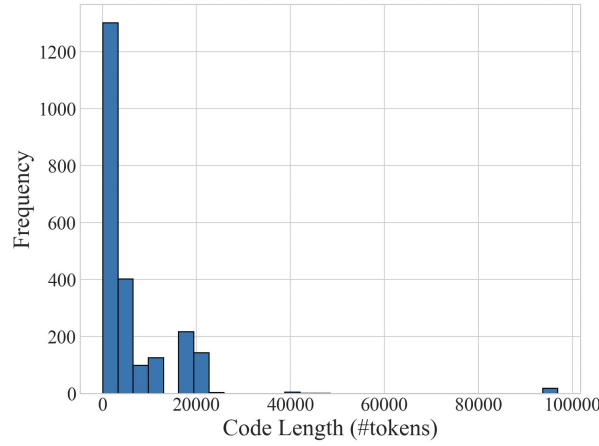


Figure 5: Histogram of input code length in SV-COMP 2025. **X axis:** code length in tokens. **Y axis:** frequency in the data. Most code samples have 20K tokens ($\mu = 6,080$, $\sigma = 10,898$).

Model	FN	FP	Unknown	TP_Unconfirmed_Witness	TP	TN
GPT-5	13,492	6,607	6,658	10,356	4,874	4,422
Claude Sonnet-4.5	6,802	6,769	16,144	10,561	4,602	4,367
CWM	11,672	11,534	6,504	9,449	4,717	4,184
Qwen3-30B	7,040	6,451	6,543	10,221	4,387	4,529
GPT-4o	3,887	1,595	11,684	13,160	3,924	1,334
Average	8,579	6,591	9,507	10,749	4,501	3,767

Table 8: Mean input code length (tokens) per score type, aggregated across all models. Incorrect predictions (FN, FP) and unknowns are associated with longer code inputs, while correct predictions (TP, TN) occur on shorter inputs. Unconfirmed witness cases show the highest average code length, suggesting models often abstain or struggle with validation on complex code.

Subcategory	Description	Samples
BitVectors	Programs involving bit-precise arithmetic operations.	34
MainControlFlow	Programs with complex control flow (e.g., loops, conditionals, recursion).	281
MainHeap	Programs that utilize dynamic heap memory allocation and manipulation.	202
Other	Miscellaneous benchmarks related to termination verification.	1,822
Total	Union over subcategories. We follow SV-COMP 2025 and exclude 11 invalid tasks (9 from “MainControlFlow” and 2 from “Other”)	2,328

Table 9: Distribution of termination verification tasks in SV-COMP 2025 across four subcategories.

Program Termination Analysis Prompt

You are an expert code analyzer specializing in program termination analysis. You will be given a C program to analyse. Every line of the program will begin with a line number (e.g., 13: `x = x + 1` for line 13), which is for tracking and does not affect compilation. The program may either terminate for all inputs or diverge for some inputs. A function called `__VERIFIER_nondet_X()` can return an arbitrary value of type `X`.

Determine whether the program terminates on all inputs. Your goal is to earn the maximum number of points by answering correctly.

- If the program always terminates, respond with:

```
{
  "verdict": true
}
```

If you are correct, you will earn points.

- If the program can diverge (i.e., may not terminate for some inputs), respond with:

```
{
  "verdict": false,
  "witness": { ... }
}
```

and provide a witness demonstrating the control flow graph of the non-termination loop. If you are correct and the witness is valid, you will earn points.

- If your answer is incorrect, you will lose points. The most severe error is predicting termination (`"verdict": true`) when the correct answer is non-termination (`"verdict": false`), which will result in the largest point deduction.
- If you cannot confidently determine whether the program always terminates, it is recommended to respond with:

```
{
  "verdict": null
}
```

This will not earn points but also incurs no penalty.

Witness Generation for Non-Terminating Programs

When the verdict is false (non-terminating program), you MUST include a witness object that represents the control flow graph focused on the infinite loop structure.

JSON Structure (SV-COMP Witness Format):

- **Nodes:** id, entry, cyclehead
- **Edges:** id, source, target, line, sourcecode, control, assumption, enterLoopHead, enterFunction, returnFrom

Critical Constraints:

1. Unique edge IDs and line numbers
2. Loop head entries marked with `enterLoopHead: true`
3. Node conventions: N1 is entry, N0 is cyclehead
4. Cycle structure: last edge targets N0
5. Focus on loop, no exit paths
6. Graph flow: N1 $\rightarrow$ setup $\rightarrow$ N0 $\rightarrow$ loop body $\rightarrow$ N0 (cycle)

Graph Flow Structure:

1. Start at N1 (entry node)
2. Progress through necessary setup
3. Enter the loop head N0
4. Execute loop body
5. Final edge targets N0, creating the infinite cycle

Figure 6: Task requirements for program termination analysis in SV-COMP format.

Method	SV-COMP-1			SV-COMP-TTS@10		
	Score	F1 (T)	F1 (NT)	Score	F1 (T)	F1 (NT)
GPT-5	3,211 ($\pm$ 185)	.98 ($\pm$.001)	.97 ($\pm$.002)	3,520 ($\pm$ 47)	.98 ($\pm$.001)	.96 ($\pm$.002)
Claude Sonnet-4.5	2,737 ($\pm$ 184)	.98 ($\pm$.002)	.96 ($\pm$.003)	3,448 ($\pm$ 49)	.94 ($\pm$.003)	.89 ($\pm$.005)
CWM	1,491 ($\pm$ 324)	.91 ($\pm$.004)	.80 ($\pm$.011)	3,129 ($\pm$ 80)	.84 ($\pm$.003)	.63 ($\pm$.008)
Qwen3-30B	225 ($\pm$ 214)	.90 ($\pm$.004)	.78 ($\pm$.010)	2,895 ($\pm$ 84)	.83 ($\pm$.003)	.59 ($\pm$.005)
GPT-4o	-5,145 ($\pm$ 750)	.73 ($\pm$.004)	.49 ($\pm$.006)	546 ($\pm$ 146)	.73 ($\pm$.004)	.50 ($\pm$.006)
PROTON	3,685	—	—	—	—	—
UAutomizer	3,334	—	—	—	—	—
AProVE	2,219	—	—	—	—	—
Max	4,079	1.0	1.0	4,079	1.0	1.0
Min	-50,064	0.0	0.0	-50,064	0.0	0.0

Table 10: SV-COMP-1, SV-COMP-TTS@10, and F1 scores over termination (T) and non-termination (NT). Results are reported as mean $\pm$ standard deviation over 100 bootstrap runs; unknown predictions are treated as errors for F1.

Examples: Example 1: Non-Terminating Program

```
1: extern int __VERIFIER_nondet_int(void);
2: int main() {
3:     int x;
4:     x = __VERIFIER_nondet_int();
5:
6:     while (x % 2 == 0) {
7:         x = x + 2;
8:     }
9:     return 0;
10: }
```

Expected answer:

```
{
  "verdict": false,
  "witness": {
    "nodes": [
      { "id": "N1", "entry": "true" },
      { "id": "N2" },
      { "id": "N0", "cyclehead": "true" },
      { "id": "N3" }
    ],
    "edges": [
      { "id": "E0", "source": "N1", "target": "N2", "line": 3, "sourcecode": "int x;" },
      { "id": "E1", "source": "N2", "target": "N0", "line": 4, "enterLoopHead": true, "sourcecode":
        "x = __VERIFIER_nondet_int()" },
      { "id": "E2", "source": "N0", "target": "N3", "line": 6, "control": "condition-true",
        "assumption": "x % 2 == 0", "sourcecode": "while (x % 2 == 0) {" },
      { "id": "E3", "source": "N3", "target": "N0", "line": 7, "enterLoopHead": true, "sourcecode":
        "x = x + 2" }
    ]
  }
}
```

Example 2: Terminating Program

```
1: extern int __VERIFIER_nondet_int(void);
2: int main() {
3:     int i, j;
4:     j = 0;
5:     for (i = 0; i < 10; i++) {
6:         j = j + 1;
7:     }
8:     return 0;
9: }
```

Expected answer:

```
{
  "verdict": true
}
```

Figure 7: Few-shot examples for program termination and non-termination for the SV-COMP prompt.

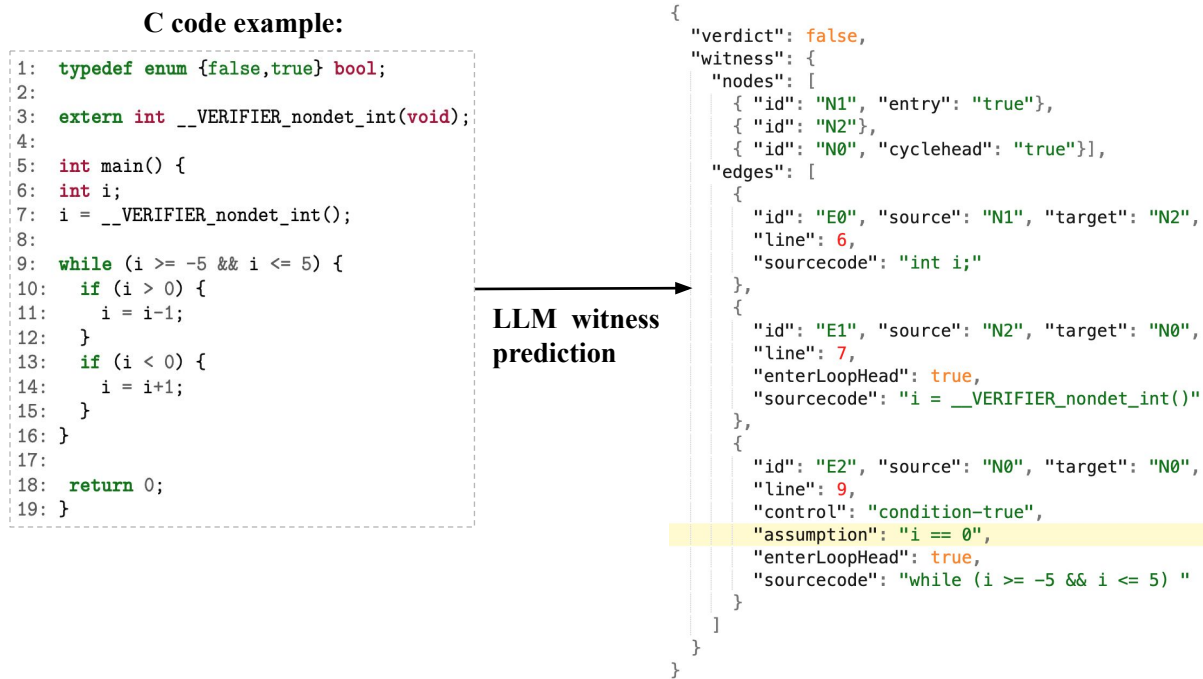


Figure 8: Example of an LLM-generated witness automaton (graph) in json format.

Domain Witness Prompt

You are given a main function in C programming language that contains a loop or recursion and does not terminate for all inputs.

Note: `__VERIFIER_nondet_` defines a non-deterministic value that can be used to generate a random input.

Your task: Predict for which non-deterministic inputs it will not terminate (diverge).

To achieve this: Simulate the execution of the main function step-by-step.

During simulation, detect early signs of divergence based on the logic of the loop.

For example: if a variable used in the loop condition or update becomes positive while another grows unboundedly, or if the loop body increases a value that keeps the loop condition true indefinitely, this may indicate divergence.

Important:

Do not add arbitrary iteration limits unless strictly necessary for safety – the detection should be logical and correct.

Assume the function uses only basic arithmetic and comparisons; no external state or side effects.

In your answer: Write an expression involving the non-deterministic variables, which describes the conditions under which the function main is guaranteed to diverge.

Please write an expression involving the non-deterministic variables and the logic gates ("and", "or", "not", and so on) for the range of input values causing the program to diverge.

An example would be as follows:

```
typedef enum {false,true} bool;
extern int __VERIFIER_nondet_int(void);
int main() {
  int i;
  i = __VERIFIER_nondet_int();
  while (i != 0) {
    if (i < 0) {
      i = i+2;
      if (i < 0) {
        if (i <= -2147483648) return 0;
        i = i*(-1);
      }
    }
    else {
      i = i-2;
      if (i > 0) {
        i = i*(-1);
      }
    }
  }
  return 0;
}
```

Expected answer:

$(i \bmod 2 \neq 0)$ and $(i \geq -2147483649)$

Figure 9: A one-shot example prompt given to the model for the domain witness prompt.

Input C code:

```

1: //
2: //
3: //
4:
5: /*
6: *
7: *
8: */
9:
10: extern int __VERIFIER_nondet_int(void);
11:
12: int main() {
13:     int a, x, y;
14:     x = __VERIFIER_nondet_int();
15:     y = __VERIFIER_nondet_int();
16:     a = 0;
17:     while (y > 0) {
18:         if (x < 0) {
19:             y = x;
20:         } else {
21:             y = y - 1;
22:         }
23:     }
24:     return 0;
25: }

```

A correct domain witness:

$x < -1$ and $y > 0$

A correct witness automaton prediction:

```

{
  "verdict": false,
  "witness": {
    "nodes": [
      { "id": "N1", "entry": "true" },
      { "id": "N2" },
      { "id": "N3" },
      { "id": "N4" },
      { "id": "N5" },
      { "id": "N0", "cyclehead": "true" },
      { "id": "N6" }
    ],
    "edges": [
      { "id": "E0", "source": "N1", "target": "N2", "line": 13, "sourcecode": "int a, x, y;" },
      { "id": "E1", "source": "N2", "target": "N3", "line": 14, "sourcecode": "x = __VERIFIER_nondet_int()" },
      { "id": "E2", "source": "N3", "target": "N4", "line": 15, "sourcecode": "y = __VERIFIER_nondet_int()" },
      { "id": "E3", "source": "N4", "target": "N5", "line": 16, "sourcecode": "a = 0" },
      { "id": "E4", "source": "N5", "target": "N0", "line": 17, "enterLoopHead": true, "sourcecode": "while (y > 0)" },
      { "id": "E5", "source": "N0", "target": "N6", "line": 18, "control": "condition-true", "assumption": "x < 0", "sourcecode": "if (x < 0)" },
      { "id": "E6", "source": "N6", "target": "N0", "line": 19, "enterLoopHead": true, "sourcecode": "y = x" }
    ]
  }
}

```

Figure 10: A sample where CWM produces both a **correct domain witness prediction** and a **correct graph-based prediction** (SV-COMP). The model's output includes natural language reasoning (omitted for brevity) and a JSON answer: the verdict is false for NT and true for T, with a witness provided for NT cases.

Input C code:

```

1: typedef enum {false,true} bool;
2:
3: extern int __VERIFIER_nondet_int(void);
4:
5: int main() {
6:     int i;
7:     i = __VERIFIER_nondet_int();
8:
9:     while (i >= -5 && i <= 5) {
10:         if (i > 0) {
11:             i = i-1;
12:         }
13:         if (i < 0) {
14:             i = i+1;
15:         }
16:     }
17:
18:     return 0;
19: }

```

A wrong domain witness:

```
i = 0
```

The correct domain witness:

```
i >= -5 and i <= 5
```

A correct witness automaton prediction:

```

{
  "verdict": false,
  "witness": {
    "nodes": [
      { "id": "N1", "entry": "true" },
      { "id": "N2" },
      { "id": "N0", "cyclehead": "true" }
    ],
    "edges": [
      { "id": "E0", "source": "N1", "target": "N2", "line": 6, "sourcecode": "int i;" },
      { "id": "E1", "source": "N2", "target": "N0", "line": 7, "enterLoopHead": true, "sourcecode":
        "i = __VERIFIER_nondet_int()" },
      { "id": "E2", "source": "N0", "target": "N0", "line": 9, "control": "condition-true",
        "assumption": "i == 0", "enterLoopHead": true, "sourcecode": "while (i >= -5 && i <= 5) " }
    ]
  }
}

```

Figure 11: A sample where CWM produces a **wrong domain witness prediction** but a **correct graph-based prediction** (SV-COMP). The model's output includes natural language reasoning (omitted for brevity) and a JSON answer: the verdict is false for NT and true for T, with a witness provided for NT cases. The witness automaton graph demonstrates a non-terminating loop: the variable i may start at any value from -5 to 5 , and after several iterations, i eventually reaches 0 (as indicated by the assumption property in edge E2), causing the loop to continue indefinitely. So the correct domain is $i \geq -5$ and $i \leq 5$.

Input C code:

```
1: typedef enum {false,true} bool;
2:
3: extern int __VERIFIER_nondet_int(void);
4:
5: int main() {
6:     int i;
7:     i = __VERIFIER_nondet_int();
8:
9:     while (i < 0) {
10:         if (i != -5) {
11:             i = i+1;
12:         }
13:     }
14:
15:     return 0;
16: }
```

A correct domain witness prediction:

i <= -5

A wrong witness automaton prediction:

```
{
  "verdict": false,
  "witness": {
    "nodes": [
      {"id": "N1", "entry": "true"},
      {"id": "N2"},
      {"id": "N0", "cyclehead": "true"},
      {"id": "N3"}
    ],
    "edges": [
      {"id": "E0", "source": "N1", "target": "N2", "line": 6, "sourcecode": "int i;"},
      {"id": "E1", "source": "N2", "target": "N0", "line": 7, "enterLoopHead": true, "sourcecode":
        "i = __VERIFIER_nondet_int()"},
      {"id": "E2", "source": "N0", "target": "N3", "line": 9, "control": "condition-true",
        "assumption": "i < 0", "sourcecode": "while (i < 0) "},
      {"id": "E3", "source": "N3", "target": "N0", "line": 11, "enterLoopHead": true, "sourcecode":
        "i = i+1"}
    ]
  }
}
```

A correct witness automaton prediction:

```
{
  "verdict": false,
  "witness": {
    "nodes": [
      {"id": "N1", "entry": "true"},
      {"id": "N2"},
      {"id": "N0", "cyclehead": "true"},
      {"id": "N3"}
    ],
    "edges": [
      {"id": "E0", "source": "N1", "target": "N2", "line": 6, "sourcecode": "int i;"},
      {"id": "E1", "source": "N2", "target": "N0", "line": 7, "enterLoopHead": true, "sourcecode":
        "i = __VERIFIER_nondet_int()"},
      {"id": "E2", "source": "N0", "target": "N3", "line": 9, "control": "condition-true",
        "assumption": "i < 0", "sourcecode": "while (i < 0) "},
      {"id": "E3", "source": "N3", "target": "N0", "line": 13, "enterLoopHead": true, "sourcecode":
        ""}
    ]
  }
}
```

Figure 12: A sample where CWM produces a **correct domain witness prediction** but a **incorrect graph-based prediction** (SV-COMP). The model's output includes natural language reasoning (omitted for brevity) and a JSON verdict (true for T, false for NT), with a witness provided for NT cases. Among 10 predictions, a correct witness automaton prediction is also found and shown below the incorrect one.

Input C code:

```

1: typedef enum {false,true} bool;
2:
3: extern int __VERIFIER_nondet_int(void);
4:
5: int main() {
6:     int i;
7:     i = __VERIFIER_nondet_int();
8:
9:     while (i < 0) {
10:         if (i != -5) {
11:             i = i+1;
12:         }
13:     }
14:
15:     return 0;
16: }

```

Reasoning and answer: Okay, so I need to figure out for which values of the non-deterministic variable 'i' the given C program will not terminate. Let me look at the code again. The program starts by assigning 'i' a non-deterministic integer value. Then it enters a while loop that continues as long as 'i' is less than 0. Inside the loop, there's an if statement that checks if 'i' is not equal to -5. If that's true, it increments 'i' by 1. If 'i' is -5, the loop body does nothing, and the loop condition is checked again. Hmm, so let's think about what happens in different scenarios. First, if 'i' starts at a value less than -5, say -10. Then, in each iteration, since 'i' is not -5, it gets incremented by 1. So it would go from -10 to -9, then -8, and so on, until it reaches -5. At that point, when 'i' is -5, the if condition 'i != -5' becomes false, so the increment doesn't happen. The loop condition 'i < 0' is still true because -5 is less than 0, so the loop continues. But now, since 'i' is -5, the if statement doesn't execute, so 'i' remains -5. This means the loop will keep checking the condition 'i < 0', which is true, and since 'i' doesn't change, it will loop indefinitely. So any starting value of 'i' that is less than or equal to -5 will cause the program to diverge. Wait, but what if 'i' starts at a value greater than or equal to 0? Then the loop condition 'i < 0' is false from the start, so the loop doesn't execute at all, and the program terminates immediately. That's not a problem. What about if 'i' starts between -5 and 0, like -3? Then, in the first iteration, since 'i' is not -5, it gets incremented by 1, becoming -2. Then the loop condition is checked again. Since -2 is still less than 0, the loop continues. Again, 'i' is not -5, so it increments to -1. Then the loop condition is checked again. -1 is less than 0, so loop again. Increment to 0. Now, the loop condition 'i < 0' is false, so the loop exits, and the program terminates. So starting values between -4 and -1 (inclusive) will eventually reach 0 and terminate. But wait, what if 'i' starts at -5? Then, in the first iteration, the if condition 'i != -5' is false, so 'i' doesn't change. The loop condition 'i < 0' is true, so the loop continues. But since 'i' remains -5, this will loop forever. So starting at -5 is a problem. Similarly, if 'i' starts at any value less than -5, like -6, -7, etc., it will increment by 1 each time until it reaches -5. Once it reaches -5, the increment stops, and the loop continues indefinitely because 'i' is still less than 0. So any starting value less than or equal to -5 will cause divergence. Wait, but let's test this with an example. Suppose 'i' starts at -6. First iteration: 'i' is -6 (not -5), so increment to -5. Now, 'i' is -5. Next iteration: 'i' is -5, so the if condition is false, no increment. Loop condition 'i < 0' is true, so loop again. 'i' remains -5. This repeats forever. So yes, starting at -6 leads to divergence. Another example: 'i' starts at -5. First iteration: 'i' is -5, so no increment. Loop condition is true, loop again. 'i' remains -5. Diverges. If 'i' starts at -4: first iteration, 'i' is -4 (not -5), increment to -3. Loop condition true. Next iteration, 'i' is -3, increment to -2. Loop condition true. Next, 'i' is -2, increment to -1. Loop condition true. Next, 'i' is -1, increment to 0. Loop condition false, exit. Terminates. So the divergence occurs when the initial value of 'i' is less than or equal to -5. Because in those cases, the loop will eventually reach -5 (if starting below -5) or start at -5, and then get stuck in an infinite loop. Wait, but what if 'i' starts at a value less than -5, but when it increments, it skips over -5? No, because it increments by 1 each time. So if 'i' starts at -6, it goes to -5, then stops incrementing. If it starts at -1000, it will increment 995 times to reach -5, then stop. So any starting value less than or equal to -5 will eventually reach -5 and then loop forever. Therefore, the condition for divergence is 'i <= -5'. But wait, let me check the code again. The loop condition is 'i < 0'. So when 'i' is -5, the loop continues. But when 'i' is -5, the if statement 'i != -5' is false, so 'i' doesn't change. So the loop will run indefinitely. Therefore, the program diverges if and only if the initial value of 'i' is less than or equal to -5. But wait, what if 'i' is exactly -5? Then the loop runs once, checks 'i < 0' (true), enters the loop body. Since 'i' is -5, the if condition is false, so 'i' remains -5. Then the loop condition is checked again, still true, and this repeats forever. So yes, 'i = -5' is a diverging case. Therefore, the divergence condition is 'i <= -5'. But let me think again. Suppose 'i' is -5. The loop runs, but 'i' doesn't change. So it's an infinite loop. If 'i' is less than -5, like -6, then it increments to -5, then gets stuck. So any 'i <= -5' will diverge. Therefore, the answer should be 'i <= -5'. Wait, but the problem says to write an expression involving the non-deterministic variables and logic gates. So in this case, the non-deterministic variable is 'i', and the condition is 'i <= -5'. But let me check if there's any other possibility. For example, what if 'i' is a very large negative number, like -2147483648 (assuming 32-bit int). Then, incrementing by 1 each time until it reaches -5. But since integers in C can overflow, but in this case, since we're dealing with negative numbers and incrementing, it should be okay. Wait, but if 'i' is -2147483648 (the minimum value for a 32-bit signed int), then incrementing it by 1 would result in -2147483647, and so on, until it reaches -5. So even in that case, it would eventually reach -5 and then loop forever. So the condition 'i <= -5' holds. Therefore, the program diverges if and only if the initial value of 'i' is less than or equal to -5. So the answer should be 'i <= -5'. Wait, but let me make sure there aren't any other edge cases. For example, what if 'i' is 0? Then the loop doesn't run, program terminates. If 'i' is positive, same thing. If 'i' is between -4 and -1, it increments until it reaches 0 and exits. So yes, only 'i <= -5' causes divergence. Therefore, the condition is 'i <= -5'.

Figure 13: A correct domain witness prediction by CWM: reasoning followed by the logical answer, $i \leq -5$.