

ZEROTOP: Zero-Shot Task-Oriented Semantic Parsing using Large Language Models

Dheeraj Mekala^{1*} Jason Wolfe² Subhro Roy²

¹UC San Diego ²Microsoft Semantic Machines

dmekala@ucsd.edu sminfo@microsoft.com

Abstract

We explore the use of large language models (LLMs) for zero-shot semantic parsing. Semantic parsing involves mapping natural language utterances to task-specific meaning representations. Language models are generally trained on the publicly available text and code and cannot be expected to directly generalize to domain-specific parsing tasks in a zero-shot setting. In this work, we propose ZEROTOP, a zero-shot task-oriented parsing method that decomposes a semantic parsing problem into a set of abstractive and extractive question-answering (QA) problems, enabling us to leverage the ability of LLMs to zero-shot answer reading comprehension questions. For each utterance, we prompt the LLM with questions corresponding to its top-level intent and a set of slots and use the LLM generations to construct the target meaning representation. We observe that current LLMs fail to detect unanswerable questions; and as a result cannot handle questions corresponding to missing slots. To address this problem, we fine-tune a language model on public QA datasets using synthetic negative samples. Experimental results show that our QA-based decomposition paired with the fine-tuned LLM can correctly parse $\approx 16\%$ of utterances in the MTOP dataset without requiring any annotated data.

1 Introduction

Large pre-trained language models (LLMs) (Sanh et al., 2021; Brown et al., 2020; Chen et al., 2021; He et al., 2021) have been shown to attain reasonable zero-shot generalization on a diverse set of NLP tasks including text classification, question answering and text summarization (Wang et al., 2019). These models when prompted with natural language description or a common template for the task along with the input, can directly generate the

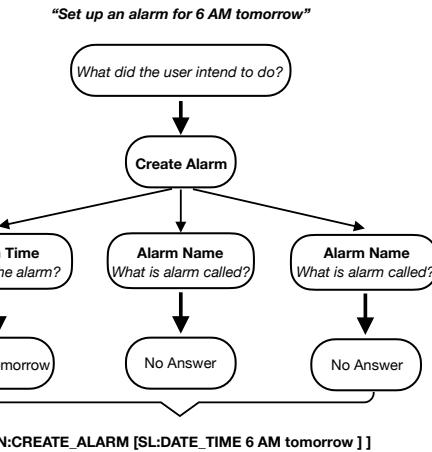


Figure 1: Example of decomposing semantic parsing task into QA task.

correct output with reasonable accuracy for many natural language processing problems.

LLMs are generally trained on publicly available text (Liu et al., 2019; Raffel et al., 2020; Brown et al., 2020) and code (Chen et al., 2021), and they are not expected to generalize to domain-specific semantic parsing tasks in a similar way. The output of semantic parsing comprises user-defined domain-specific functions, argument names, and syntax where the inductive bias from pre-training is less helpful. Instead, we leverage the LLM’s ability to zero-shot answer reading comprehension questions. In this work, we propose ZEROTOP that decomposes the semantic parsing task into one of answering a series of extractive and abstractive questions, corresponding to its top-level intent and a set of relevant slots. For example, as shown in Figure 1, the utterance is decomposed into multiple questions related to the intent (alarm creation) and slots (parameters of the alarm creation). The answers to these questions can be combined to infer the target meaning representation.

As illustrated in Figure 2, we cast top-level intent classification as an abstractive QA task. One

* Work done during an internship at Microsoft Semantic Machines



"please send that message to my grandparents on WhatsApp"

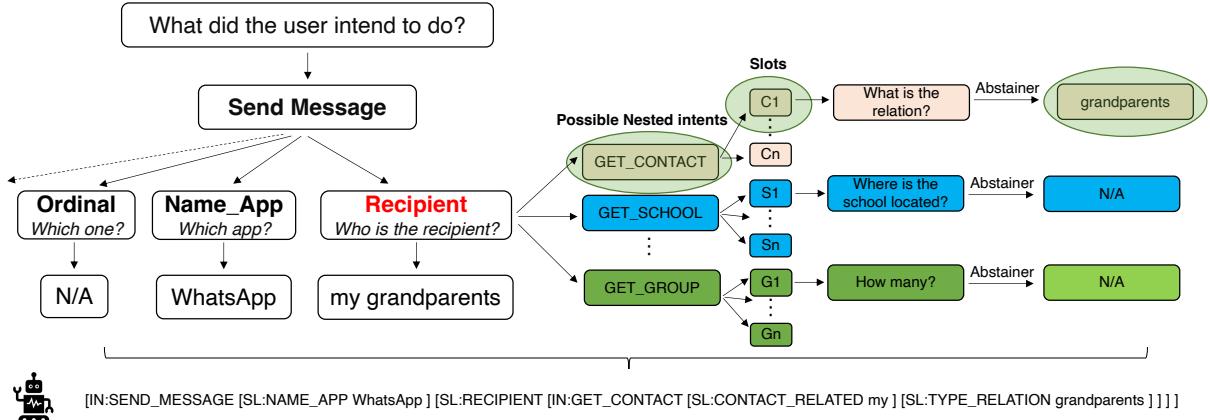


Figure 2: ZEROTOP decomposes semantic parsing into multiple QA tasks. First, we identify top-level intent by casting it as an abstractive QA task. Next, we prompt for each slot using its corresponding question to extract their respective slot values. If a slot can accommodate nested intents (in red), we hierarchically prompt for nested slots. Finally, we combine all the responses to create the meaning representation.

intuitive way to predict intent is to constrain autoregressive LMs to search over only valid intent labels. However, LLMs are known to be biased towards predicting labels common in the pretraining data (Zhao et al., 2021). Therefore, we propose to generate an intent description in an unconstrained manner from an LLM and infer the intent label most similar to the generated description.

We view slot value prediction as an extractive QA problem. Most utterances do not mention all the slots. For example, in the MTOP dataset, on average, only one-third of possible slots are mentioned per utterance. It is therefore essential for the model to abstain from prediction when corresponding slots are not mentioned. Through our analyses, we observe that most LLMs frequently hallucinate text for missing slots with high confidence, resulting in poor performance in slot value prediction. To address this, we fine-tune a language model on a collection of public QA datasets augmented with synthetic *unanswerable* samples. We call our trained model *Abstainer*, as it is capable of identifying unanswerable questions and abstaining from prediction. We hierarchically prompt for nested slots using the *Abstainer*, and infer nested intents if their corresponding slots are detected.

Our contributions are summarized as follows:

- We propose ZEROTOP that leverages LLMs for zero-shot semantic parsing by decomposing the task into answering a series of questions.
- To address the LM’s bias towards specific intent labels, we propose intent description generation

in an unconstrained manner and then selecting most similar intent label to the description.

- We show that current pre-trained LLMs fail to abstain from prediction for unanswerable questions. We address this by finetuning a language model called *Abstainer* on public QA datasets augmented with synthetically generated unanswerable QA pairs. *Abstainer* can be successively applied to generate nested meaning representations.
- Our method significantly outperforms pre-trained LLMs on the MTOP dataset.

2 Related Work

Large pre-trained language models are increasingly used to support semantic parsing in low-data scenarios. Shin et al. (2021) constrain GPT-3 and BART so that the LMs generate valid canonical representations that can be mapped back to meaning representations. Schucher et al. (2022); Drozdov et al. (2022) explore prompt tuning for semantic parsing with LLMs. Yang et al. (2022) decomposes canonical utterance generation into sub-clause generation and augments the generated sub-clauses into a canonical utterance. Rubino et al. (2022) presents a cross-schema parser for several tasks in a given vertical by augmenting schema-specific context to the input along with the utterance. The closest work to ours is Zhao et al. (2022) where they decompose parsing into abstractive QA tasks and aggregate answers to construct a meaning representation. These methods assume access to

some data either from the same domain, in the same format from a different domain or synthetically generated from a synchronous grammar. In contrast, we focus on a strict zero-shot setting where only the schema information is available along with some natural language prompts for schema entities.

Our work is also related to approaches towards zero-shot dialog state tracking using language models (Gao et al., 2020; Lin et al., 2021a,b). Specifically, Lin et al. (2021a) uses an Abstainer similar to ours to handle missing slots. Our method differs in that, we focus on semantic parsing where the Abstainer needs to be applied multiple times along with intent detection to create nested meaning representations. Our approach does not require enumerating choices in the prompt allowing us to handle a large number of intents and slots as found in semantic parsing datasets like MTOP.

3 ZEROTOP: Zero-Shot Task-Oriented Semantic Parsing

3.1 Problem Formulation

We focus on task-oriented parsing with hierarchical intent-slot schema. Let $\mathcal{I} = \{\mathcal{I}_1, \mathcal{I}_2, \dots, \mathcal{I}_n\}$ be the set of all possible top-level intents and $\mathcal{S} = \{\mathcal{S}_1, \mathcal{S}_2, \dots, \mathcal{S}_m\}$ be the set of all possible slots. Each intent \mathcal{I}_j has a set of slots $\mathcal{S}^j = \{\mathcal{S}_1^j, \mathcal{S}_2^j, \dots, \mathcal{S}_n^j\}$ that can be filled. Possible slots in an intent are represented by the intent-to-slot mapping $I2S: \mathcal{I} \rightarrow \mathcal{P}(\mathcal{S})$, where $\mathcal{P}(\cdot)$ is the powerset operator that generates the set of all subsets. Similarly, the inverse slot-to-intent mapping is represented by $S2I: \mathcal{S} \rightarrow \mathcal{I}$. The input in a zero-shot setting contains no training data, however, we assume access to the intent-slot, slot-intent mappings $I2S$, $S2I$. Our method requires users to provide a question per slot, that is representative of their purpose. Let $\mathcal{Q} = \{\mathcal{Q}_{\mathcal{S}_1}, \mathcal{Q}_{\mathcal{S}_2}, \dots, \mathcal{Q}_{\mathcal{S}_k}\}$ represent respective questions for slots. In a real-life setting, this can be easily obtained from the domain developer who designed the schema.

3.2 Unconstrained Generation for Zero-Shot Intent Classification

We view zero-shot intent classification as an abstractive question-answering problem and use pre-trained LLMs to answer them. One intuitive way to predict the intent is to prime the LLM with a QA prompt and then constrain the generation to search over only valid intent labels (Shin et al., 2021). However, LLMs are known to be biased

Algorithm 1: ZEROTOP: Our proposed Zero-shot semantic parsing method.

```

Input: Set of intents  $\mathcal{I}$ , Set of slots  $\mathcal{S}$ , Slot questions  $\mathcal{Q}$ , intent-to-slot mapping  $I2S$ , slot-to-intent mapping  $S2I$ , slot-to-candidate-nested-intent mapping  $S2NI$ , Intent-model  $\mathcal{M}_I$ , Abstainer  $\mathcal{M}_{abs}$ , and Utterance  $u$ 
Output: Predicted meaning representations MR
intent =  $\mathcal{M}_I(u)$ 
slotValues = {}
for slot  $\mathcal{S}_i \in I2S(\text{intent})$  do
    slotValues[ $\mathcal{S}_i$ ] =  $\mathcal{M}_{abs}(u, \mathcal{Q}_{\mathcal{S}_i})$ 
    for candidate N.intent  $\mathcal{I}_j \in S2NI(\mathcal{S}_i)$  do
        for slot  $\mathcal{S}_j \in I2S(\mathcal{I}_j)$  do
            if  $\mathcal{M}_{abs}(\text{slotValues}[\mathcal{S}_i], \mathcal{Q}_{\mathcal{S}_j})$  is not NONE then
                Update slotValues[ $\mathcal{S}_i$ ] with nested intent  $\mathcal{I}_j$ ,
                 $\mathcal{M}_{abs}(\text{slotValues}[\mathcal{S}_i], \mathcal{Q}_{\mathcal{S}_j})$ 
    MR = Construct representation with intent,
    slotValues
Return MR

```

towards certain text sequences (Zhao et al., 2021) more common in pretraining data. For example, in the MTOP dataset, the constrained T0-3B model predicts `CREATE_CALL` (*make call*) as intent for 92% of the data in the *call* domain. Therefore, we propose to first generate intent description in an unconstrained fashion and then choose the label that is most similar to the generated answer. Specifically, we prime the LM with the below prompt and let the LM generate without any constraints. Then, we choose the most similar label based on cosine similarity between intent label and generated text using RoBERTa sentence similarity (Reimers and Gurevych, 2019). We find our proposed approach does not exhibit bias towards certain labels as noticed with constrained generation.

Answer the following question depending on the context.

context: A user said, {utterance}.

question: What did the user intend to do?

answer:

3.3 Leveraging QA datasets for Slot Value Prediction

Slot value prediction involves extracting phrases for a slot from the user utterance. Thus, we cast this as an extractive QA problem. All slots might not be mentioned in an input utterance. The QA model needs to abstain from prediction for the corresponding questions for the missing slots. To analyze the abstaining capability of pre-trained QA models, we consider some of the top-performing zero-shot

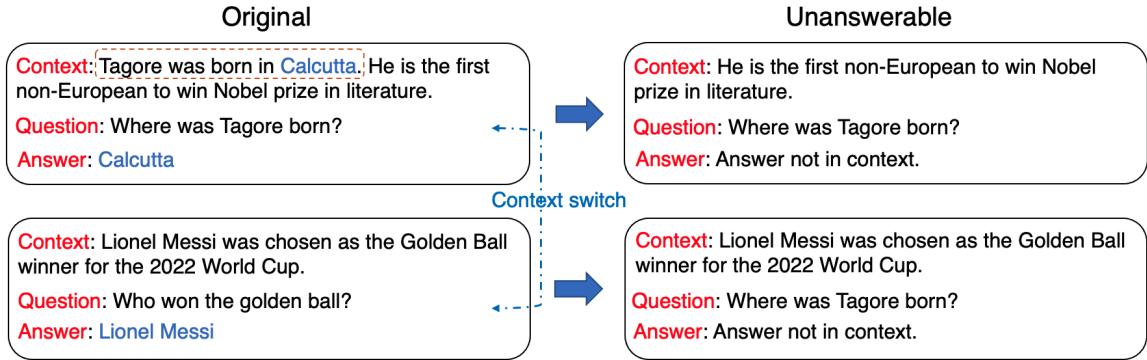


Figure 3: An example demonstrating unanswerable sample generation. The first unanswerable sample is generated by removing the sentence containing the answer (highlighted with dashed lines) from the context. The second unanswerable sample is generated by swapping the context of two original samples.

models T0-3B (Sanh et al., 2021), GPT-3 (Brown et al., 2020), and Codex (Chen et al., 2021) and experiment on a 500 sample subset of unanswerable questions from the SQuAD dataset (Rajpurkar et al., 2018). We constrain the models to generate either from the context or from a set of manually created phrases indicating that the question cannot be answered. We use the prompts and phrases mentioned in Sanh et al. (2021); Brown et al. (2020); Chen et al. (2021) and observe the accuracy of all models to be $< 5\%$. We notice that the LLMs frequently hallucinate and generate answers for unanswerable questions. In our experiments section 4.5, we also consider a log-likelihood-based threshold for abstaining and we show that this threshold is difficult to tune using public QA datasets.

To address this challenge, we leverage multiple publicly available extractive and abstractive QA datasets¹ to train *Abstainer*, a QA model capable of abstaining from prediction. Specifically, we generate synthetic unanswerable training samples by modifying existing QA data, and train a QA model jointly on the existing datasets and the synthetic unanswerable questions. For every (question, answer, context) triplet, we generate synthetic unanswerable questions by either (1) removing the sentence containing the answer span from the context, or (2) randomly sampling a context that doesn't have the same question. For example, as shown in Figure 3, we generate the first unanswerable sample by removing the sentence “Tagore was born in Calcutta” containing the answer *Calcutta* from the context and second unanswerable sample by switching the context of two original answerable samples. We augment

these synthetic unanswerable training samples to the existing datasets and train our *Abstainer*. After training the *Abstainer*, we prompt it for each slot with its corresponding question for slot value prediction. The prompt has the following format:

```
Answer the following question depending on the context.  

context: A user said, {utterance}.  

question: {slot question}  

answer:
```

Nested Intents To identify nested intents, we assume knowledge of the candidate nested intents that can be accommodated by each slot, represented by the slot-to-candidate-nested-intent mapping S2NI: $\mathcal{S} \rightarrow \mathcal{P}(\mathcal{I})$. Our method assumes that the depth of output representations is at most 4 i.e. nested intents cannot further have more nested intents.

Since we assume access to slots that accommodate nested intents, we query for possible nested intents for all such slots from their respective slot values. One intuitive way is to prompt the LLM for nested intent with the intent prediction prompt. However, our unconstrained generation-based intent model would predict many false positive nested intents. We instead use *Abstainer* to prompt for their respective slots. If any slot value is identified, we consider its corresponding intent via slot-to-intent mapping S2I to be present as well.

3.4 ZEROTOP: Putting it all together

The pseudo-code of the proposed pipeline is mentioned in Algorithm-1. ZEROTOP employs a top-down, greedy prompting strategy, where we first prompt for intent and then, their respective slots.

¹The QA datasets details are mentioned in Appendix A.1

Dataset	# Samples	# Intents	# Slots
MTOP-En	4386	113	74

Table 1: Relevant statistics of the dataset used in our experiments.

First, we obtain the top-level intent using the intent model. Based on the predicted intent, we prime the Abstainer for corresponding slots using their respective questions as prompts, to identify their slot values. For each identified slot value, we prompt the Abstainer for slots of candidate nested intents. We use the same prompt format for this step with the identified slot value now considered as the input utterance. Finally, we combine predicted intent, identified slot values, and nested intents to create the meaning representation. We illustrate the pipeline with an example in Figure 2.

4 Experiments

In this section, we evaluate ZEROTOP against multiple pre-trained LLMs under zero-shot setting.

4.1 Datasets

We experiment on the English language subset of MTOP (Li et al., 2021) dataset. MTOP is a multilingual task-oriented semantic parsing dataset comprising data from 6 languages and 11 domains. The dataset details are mentioned in Table 1. On average, each intent has 3.6 slots and only one-third of possible slots are filled for an utterance.

4.2 Baselines

We compare ZEROTOP with high-performing zero-shot LLMs as both intent and slot models. We consider the following models for zero-shot intent prediction:

1. **T0-3B, GPT-3, Codex constrained** are pre-trained T0-3B, GPT-3, Codex models that are primed with intent generation prompt and the output is constrained to search over valid intent labels.
2. **T0-3B constrained calibrated** is same as above T0-3B constrained that is calibrated for intent labels following Zhao et al. (2021). Specifically, we estimate the model’s bias towards each intent label by prompting with a content-free test input such as "N/A" and fit calibration parameters accordingly to cause the prediction for this input to be uniform across answers.

Intent Model	Accuracy(%)
T0-3B constrained	34.02
T0-3B constrained calibrated	36.64
GPT-3 constrained	40.44
Codex constrained	48.02
RoBERTa-base similarity	47.14
ZEROTOP-Intent	49.58

Table 2: Top-level intent classification results. Accuracy is used as the evaluation metric.

3. **RoBERTa-base similarity** is an ablated version of ZEROTOP where we assign intent labels based only on their similarity with user utterance using the RoBERTa sentence transformer (sts-b-roberta-base).
4. **ZEROTOP-Intent** is our proposed intent prediction method that generates intents in an unconstrained fashion by priming T0-3B with intent generation prompt and assigns labels based on their similarity with intent labels using the RoBERTa sentence transformer (sts-b-roberta-base).

We consider the following models for slot prediction:

1. **GPT-3, Codex, T0-3B constrained** are pre-trained GPT-3, Codex, T0-3B models that are primed with the question corresponding to slot and the output is constrained to be either from the user utterance or from a set of phrases indicating that the question cannot be answered. We use their corresponding phrases mentioned in Brown et al. (2020); Chen et al. (2021); Sanh et al. (2021). We use the OpenAI API text-davinci-001 for GPT-3 and code-davinci-002 for Codex.
2. **Abstainer** is our finetuned T0-3B model that abstains from prediction. It is primed with the question corresponding to the slot and the output is constrained to be either from the user utterance or from the set of phrases from Sanh et al. (2021) indicating that the question is unanswerable.

4.3 Experiment Settings

We evaluate on the zero-shot setting, therefore we have no training data. We manually create questions for slots Q by looking at one example per slot. For training Abstainer, we fine-tune T0-3B on the extractive and abstractive QA datasets for 1 epoch with a constant learning rate of 10^{-4} . The Abstainer is fine-tuned on 411732 answerable and

Intent Model	Slot Model	Acc(%)
GPT-3 constrained	GPT-3 constrained	3.00*
Codex constrained	Codex constrained	5.40*
T0-3B constrained	T0-3B constrained	2.42
	Abstainer	11.81
RoBERTa-base similarity	T0-3B constrained	3.88
	Abstainer	12.90
ZEROTOP-Intent	T0-3B constrained	4.10
	Abstainer	15.89

Table 3: Complete meaning representation match evaluation. Accuracy is used as the evaluation metric. To limit API cost, we limit GPT-3 and Codex evaluation on a 500-example subset, and hence their results are not directly comparable.


435898 unanswerable samples. The batch size is 32 and each batch contains an equal number of answerable and unanswerable samples. We used 8 × NVIDIA Tesla V100 for our experiments. We use complete meaning representation match accuracy as the performance metric.

4.4 Results and Discussion


We present intent classification results in Table 2 and complete meaning representation evaluation results in Table 3.

From Table 2, we observe that ZEROTOP-Intent performs significantly better than constrained T0-3B, GPT-3, and Codex for zero-shot intent classification. We found that constrained T0-3B is biased towards certain labels. For example, it predicts *CREATE_CALL* (*make call*), *SEND_Message* (*send message*), and *CREATE_Reminder* (*create reminder*), as intent for more than 90% of the data in *call*, *message*, *reminder* domains. Our proposed unconstrained formulation lets the model freely express the intent and, computing similarity later with the intent labels addresses this bias.

As shown in Table 3, the combination of ZEROTOP-Intent model and Abstainer demonstrates superior performance than alternative combinations. We observe that T0-3B, GPT-3 and Codex all fail to abstain frequently. The T0-3B model abstains only for 38% of unanswerable slot questions whereas our Abstainer is able to abstain for 89% of the unanswerable questions. As a result, we observe a notable performance gain by plugging in Abstainer as the slot model for each intent model baseline. This abstaining capability compounded with unconstrained generation-based intent predic-

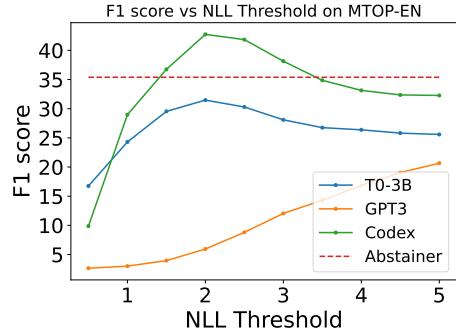

(a) F1 score vs NLL threshold on MTOP dataset

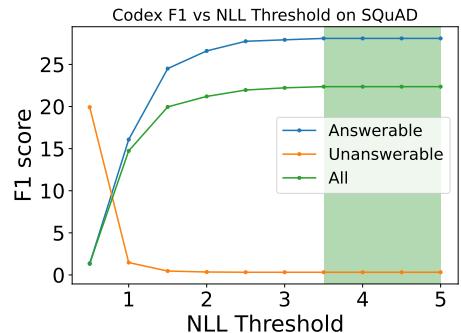

(b) F1 score vs NLL threshold on SQuAD dataset

Figure 4: We consider negative log-likelihood (NLL) as a confidence score and vary the threshold to abstain from prediction and plot F1 scores on the MTOP dataset. We show that this NLL threshold is difficult to tune using public QA datasets such as SQuAD as performance on answerable and unanswerable subsets is mutually exclusive.

tion results in a significant performance gain.

4.5 Confidence score-based Abstainer study

We can alternatively have LLMs abstain from prediction based on a confidence score based threshold. We consider negative log likelihood (NLL) of the predicted slot value as the confidence score and abstain from prediction if it is greater than the threshold. We experiment on slot value prediction task with T0-3B, Codex, and GPT3 as LLMs and plot macro F1 scores for multiple NLL thresholds on a randomly sampled subset of 500 samples from MTOP dataset in Figure 4(a). Specifically, we consider the gold intent of each sample and prime LLM for extracting slot values for each slot of the gold intent. We consider F1 score as the metric due to the label imbalance across possible slot values. We present the F1-score of the Abstainer for reference. First, we observe that Abstainer is significantly better than T0-3B and GPT3 for all confidence thresholds. Second, we notice that there is no threshold that consistently results in good per-

Model	Accuracy(%)
T5-3B parser	8.19
ZEROTOP	15.89

Table 4: Annotation effort analysis. ZEROTOP outperforms T5-3B parser trained on samples used for annotating questions Q , justifying our effort for creating questions for ZEROTOP.

formance for all LLMs, which implies that this has to be individually tuned for each LLM. Finally, we observe Codex performs better than Abstainer for some thresholds. As our problem setting includes no annotated data, we investigate whether we can infer the optimal threshold for Codex using public QA datasets. Specifically, we consider 500 answerable and 500 unanswerable QA pairs from SQuAD dataset and plot F1 scores with a range of confidence thresholds in Figure 4(b). We can observe that the performance on answerable and unanswerable subsets is mutually exclusive i.e. there is no threshold where the performance on both answerable and unanswerable subsets is high. The range of thresholds that result in the best performance on the whole set (highlighted in green) does not transfer to MTOP and is achieved at the cost of unanswerable set where the F1 score is less than 5%. Given the difficulty in tuning threshold and the API costs of Codex, we believe using Abstainer as the slot model to be a better choice.

4.6 Annotation Effort Analysis

We use 74 samples i.e. one example per slot to design questions for slots. To analyze the annotation effort, we train an end-to-end parser using these 74 samples and compare it against our method. We fine-tune T5-3B model (Raffel et al., 2020) on these samples with user utterance as input and its corresponding meaning representation as output. The complete match accuracy on the MTOP dataset is shown in Table 4. We observe that ZEROTOP performs significantly better than the parser trained on these 74 samples, justifying the annotation effort to create questions for ZEROTOP.

4.7 Greedy vs Beam search

In our proposed method, we employ a greedy strategy where we hierarchically prompt for top-level intent and for its corresponding slots. We compare it with the beam search strategy with beam size k for every prediction. Specifically, we consider k top-level intents and prompt for their correspond-

Strategy	Accuracy(%)
Greedy	15.89
Beam search (k=3)	16.86

Table 5: Greedy and Beam search prompting strategies are compared. We observe that beam search-based prompting can improve performance when validation data is provided.

ing slots, consider top- k slot values for every slot and finally compute the best meaning representation based on their aggregated NLL scores. The NLL score of intent \mathcal{I}_m , its slots $\mathcal{S}_j \in \text{I2S}(\mathcal{I}_m)$, and their corresponding slot values slotValues $[\mathcal{S}_j]$ is aggregated as follows:

$$\alpha \log p(\mathcal{I}_m) + (1 - \alpha) \sum_{\mathcal{S}_j \in \text{I2S}(\mathcal{I}_m)} \log p(\text{slotValues}[\mathcal{S}_j] | \mathcal{I}_m)$$

where α is tuned on a held-out validation set. Note that $p(\text{slotValues} | \mathcal{I}_m)$ is computed recursively for its nested intents. The performance comparison is reported in Table 5. We observe that beam search can further improve the performance when validation data is provided.

5 Conclusion

In this paper, we explore zero-shot semantic parsing using large language models. We propose ZEROTOP that decomposes semantic parsing task into abstractive and extractive QA tasks and leverage LLMs to answer them. For identifying top-level intent, we view it as an abstractive QA task and propose to generate an answer in an unconstrained fashion and infer the intent label most similar to the generated description. We demonstrate that current LLMs fail to abstain from prediction for unanswerable questions, which leads to poor performance. To address this challenge, we train Abstainer using public QA datasets, that is capable of identifying unanswerable questions and abstaining from prediction. Extensive experiments on the MTOP dataset show significant improvements over pre-trained LLMs.

References

Max Bartolo, Alastair Roberts, Johannes Welbl, Sebastian Riedel, and Pontus Stenetorp. 2020. *Beat the ai: Investigating adversarial human annotation for reading comprehension*. *Transactions of the Association for Computational Linguistics*, 8:662–678.

Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. [Language models are few-shot learners](#). In *Advances in Neural Information Processing Systems*, volume 33, pages 1877–1901. Curran Associates, Inc.

Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. 2021. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*.

Pradeep Dasigi, Nelson F. Liu, Ana Marasović, Noah A. Smith, and Matt Gardner. 2019. Quoref: A reading comprehension dataset with questions requiring coreferential reasoning. In *EMNLP*.

Andrew Drozdov, Nathanael Schärli, Ekin Akyürek, Nathan Scales, Xinying Song, Xinyun Chen, Olivier Bousquet, and Denny Zhou. 2022. Compositional semantic parsing with large language models. *arXiv preprint arXiv:2209.15003*.

Shuyang Gao, Sanchit Agarwal, Tagyoung Chung, Di Jin, and Dilek Hakkani-Tur. 2020. [From machine reading comprehension to dialogue state tracking: bridging the gap](#). In *ACL 2020 Workshop on NLP for Conversational AI*.

Luheng He, Mike Lewis, and Luke Zettlemoyer. 2015. [Question-answer driven semantic role labeling: Using natural language to annotate natural language](#). In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, pages 643–653, Lisbon, Portugal. Association for Computational Linguistics.

Pengcheng He, Jianfeng Gao, and Weizhu Chen. 2021. Debertav3: Improving deberta using electra-style pre-training with gradient-disentangled embedding sharing. *arXiv preprint arXiv:2111.09543*.

Haoran Li, Abhinav Arora, Shuohui Chen, Anchit Gupta, Sonal Gupta, and Yashar Mehdad. 2021. [MTOP: A comprehensive multilingual task-oriented semantic parsing benchmark](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 2950–2962, Online. Association for Computational Linguistics.

Kevin Lin, Oyvind Tafjord, Peter Clark, and Matt Gardner. 2019. Reasoning over paragraph effects in situations. *arXiv*, abs/1908.05852.

Zhaojiang Lin, Bing Liu, Andrea Madotto, Seungwhan Moon, Zhenpeng Zhou, Paul A Crook, Zhiguang Wang, Zhou Yu, Eunjoon Cho, Rajen Subba, et al. 2021a. Zero-shot dialogue state tracking via cross-task transfer. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 7890–7900.

Zhaojiang Lin, Bing Liu, Seungwhan Moon, Paul A Crook, Zhenpeng Zhou, Zhiguang Wang, Zhou Yu, Andrea Madotto, Eunjoon Cho, and Rajen Subba. 2021b. Leveraging slot descriptions for zero-shot cross-domain dialogue statetracking. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5640–5648.

Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Roberta: A robustly optimized bert pretraining approach. *arXiv*, abs/1907.11692.

Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, Peter J Liu, et al. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *J. Mach. Learn. Res.*, 21(140):1–67.

Pranav Rajpurkar, Robin Jia, and Percy Liang. 2018. [Know what you don't know: Unanswerable questions for SQuAD](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 784–789, Melbourne, Australia. Association for Computational Linguistics.

Nils Reimers and Iryna Gurevych. 2019. [Sentence-bert: Sentence embeddings using siamese bert-networks](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing*. Association for Computational Linguistics.

Melanie Rubino, Nicolas Guenon des Mesnards, Uday Shah, Nanjiang Jiang, Weiqi Sun, and Konstantine Arkoudas. 2022. [Cross-TOP: Zero-shot cross-schema task-oriented parsing](#). In *Proceedings of the Third Workshop on Deep Learning for Low-Resource Natural Language Processing*, pages 48–60, Hybrid. Association for Computational Linguistics.

Amrita Saha, Rahul Aralikatte, Mitesh M. Khapra, and Karthik Sankaranarayanan. 2018. DuoRC: Towards Complex Language Understanding with Paraphrased Reading Comprehension. In *Meeting of the Association for Computational Linguistics (ACL)*.

Victor Sanh, Albert Webson, Colin Raffel, Stephen H Bach, Lintang Sutawika, Zaid Alyafeai, Antoine Chaffin, Arnaud Stiegler, Teven Le Scao, Arun Raja, et al. 2021. Multitask prompted training enables zero-shot task generalization. *arXiv preprint arXiv:2110.08207*.

Nathan Schucher, Siva Reddy, and Harm de Vries. 2022. [The power of prompt tuning for low-resource semantic parsing](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 148–156, Dublin, Ireland. Association for Computational Linguistics.

Richard Shin, Christopher Lin, Sam Thomson, Charles Chen, Subhro Roy, Emmanouil Antonios Platanios, Adam Pauls, Dan Klein, Jason Eisner, and Benjamin Van Durme. 2021. [Constrained language models yield few-shot semantic parsers](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 7699–7715, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.

Kai Sun, Dian Yu, Jianshu Chen, Dong Yu, Yejin Choi, and Claire Cardie. 2019. Dream: A challenge data set and models for dialogue-based reading comprehension. *Transactions of the Association for Computational Linguistics*, 7:217–231.

Oyvind Tafjord, Matt Gardner, Kevin Lin, and Peter Clark. 2019. Quartz: An open-domain dataset of qualitative relationship questions. *arXiv preprint arXiv:1909.03553*.

Alex Wang, Yada Pruksachatkun, Nikita Nangia, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel Bowman. 2019. Superglue: A stickier benchmark for general-purpose language understanding systems. *Advances in neural information processing systems*, 32.

Wenhan Xiong, Jiawei Wu, Hong Wang, Vivek Kulkarni, Mo Yu, Shiyu Chang, Xiaoxiao Guo, and William Yang Wang. 2019. [TWEETQA: A social media focused question answering dataset](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 5020–5031, Florence, Italy. Association for Computational Linguistics.

Jingfeng Yang, Haoming Jiang, Qingyu Yin, Danqing Zhang, Bing Yin, and Diyi Yang. 2022. [SEQZERO: Few-shot compositional semantic parsing with sequential prompts and zero-shot models](#). In *Findings of the Association for Computational Linguistics: NAACL 2022*, pages 49–60, Seattle, United States. Association for Computational Linguistics.

Wenting Zhao, Konstantine Arkoudas, Weiqi Sun, and Claire Cardie. 2022. [Compositional task-oriented parsing as abstractive question answering](#). In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4418–4427, Seattle, United States. Association for Computational Linguistics.

Zihao Zhao, Eric Wallace, Shi Feng, Dan Klein, and Sameer Singh. 2021. Calibrate before use: Improving few-shot performance of language models. In *International Conference on Machine Learning*, pages 12697–12706. PMLR.

Type	Dataset	# Samples
Extractive	Adversarial QA (Bartolo et al., 2020)	36000
	QA-SRL (He et al., 2015)	8597
	DuoRC (Saha et al., 2018)	186089
	ROPES (Lin et al., 2019)	14000
	SQuADv2 (Rajpurkar et al., 2018)	150000
Abstractive	Quoref (Dasigi et al., 2019)	24000
	ReCoRD (Wang et al., 2019)	121000
	DREAM (Sun et al., 2019)	10197
	QuaRTz (Tafjord et al., 2019)	3864
Tweet-QA (Xiong et al., 2019)		10692

Table 6: Relevant statistics of the QA dataset used to train Abstainer.

A Appendix

A.1 QA Datasets for Training Abstainer

We use multiple extractive and abstractive QA datasets to generate synthetic unanswerable samples and train Abstainer. The details about datasets are mentioned in Table 6.