
GETTING ALIGNED ON REPRESENTATIONAL ALIGNMENT

Ilia Sucholutsky^{1,2*} **Lukas Muttenthaler**^{3,4,5,6*}
Adrian Weller⁷ **Andi Peng**⁸ **Andreea Bobu**⁸ **Been Kim**⁵ **Bradley C. Love**⁹
Christopher J. Cueva⁸ **Erin Grant**⁹ **Iris Groen**¹⁰ **Jascha Achterberg**^{7†}
Joshua B. Tenenbaum⁸ **Katherine M. Collins**^{7‡} **Katherine L. Hermann**⁵ **Kerem Oktar**¹
Klaus Greff⁵ **Martin N. Hebart**⁶ **Nathan Cloos**⁸ **Nikolaus Kriegeskorte**¹¹ **Nori Jacoby**¹²
Qiuyi (Richard) Zhang⁵ **Raja Marjeh**¹ **Robert Geirhos**⁵ **Sherol Chen**¹³
Simon Kornblith¹⁴ **Sunayana Rane**¹ **Talia Konkle**¹⁵ **Thomas P. O’Connell**⁸ **Thomas Unterthiner**^{5§}
Andrew K. Lampinen^{5¶} **Klaus-Robert Müller**^{3,4,5,16,17¶} **Mariya Toneva**^{18¶}
Thomas L. Griffiths^{1¶}

¹Princeton University ²NYU Center for Data Science ³TU Berlin ⁴BIFOLD ⁵Google DeepMind
⁶MPI for Human Cognitive and Brain Sciences ⁷University of Cambridge ⁸MIT ⁹UCL
¹⁰University of Amsterdam ¹¹Columbia University ¹²MPI for Empirical Aesthetics ¹³Google Research
¹⁴Anthropic ¹⁵Harvard University ¹⁶Korea University ¹⁷MPI for Informatics ¹⁸MPI for Software Systems

ABSTRACT

Biological and artificial information processing systems form representations of the world that they can use to categorize, reason, plan, navigate, and make decisions. How can we measure the similarity between the representations formed by these diverse systems? Do similarities in representations then translate into similar behavior? If so, then how can a system’s representations be modified to better match those of another system? These questions pertaining to the study of *representational alignment* are at the heart of some of the most promising research areas in contemporary cognitive science, neuroscience, and machine learning. In this Perspective, we survey the exciting recent developments in representational alignment research in the fields of cognitive science, neuroscience, and machine learning. Despite their overlapping interests, there is limited knowledge transfer between these fields, so work in one field ends up duplicated in another, and useful innovations are not shared effectively. To improve communication, we propose a unifying framework that can serve as a common language for research on representational alignment, and map several streams of existing work across fields within our framework. We also lay out open problems in representational alignment where progress can benefit all three of these fields. We hope that this paper will catalyze cross-disciplinary collaboration and accelerate progress for all communities studying and developing information processing systems.

*Equal contributions as first author. Each block of authors is sorted alphabetically.

†Work partly done while an intern at Intel Labs.

‡Work partly done while a Student Researcher at Google DeepMind.

§Presently at Helsing.

¶Equal advising/senior authors.

Contents

1	Introduction	4
2	Background and review	5
2.1	Cognitive Science	5
2.1.1	Similarity judgments and multidimensional scaling	6
2.1.2	Human-machine alignment	7
2.1.3	Semantic representations	7
2.1.4	Alignment across individual participants' behavior	7
2.1.5	Alignment across cultures	7
2.2	Neuroscience	8
2.2.1	Alignment across heterogeneous measurements	8
2.2.2	Alignment across individuals	8
2.2.3	Alignment between brain activity and model systems	9
2.2.4	Alignment for hypothesis testing	9
2.2.5	Alignment for stimulus selection or design	9
2.2.6	Alignment as communication	9
2.3	Artificial intelligence and machine learning	10
2.3.1	Model-to-model alignment	10
2.3.2	Learning human-like representational geometries	11
2.3.3	Interpretability and explainability	11
2.3.4	Behavioral alignment	11
2.3.5	Value alignment	12
2.3.6	Human-robot interaction	12
3	Framework for representational alignment	13
3.1	High-level overview	14
3.2	Formalizing representation spaces	14
3.3	Measuring alignment	15
3.3.1	Similarity or dissimilarity quantifying	16
3.3.2	Descriptive or differentiable	16
3.3.3	Symmetric or directional	18
3.3.4	Different measures afford different inferences	18
3.3.5	What does it take to unambiguously specify a similarity measure?	18
4	Representational alignment in diverse communities	19
4.1	Cognitive Science	19
4.1.1	Measuring representational alignment (Figure 1a)	19
4.1.2	Bridging representational spaces (Figure 1d)	21
4.1.3	Increasing representational alignment (Figure 1g)	22

4.2	Neuroscience	23
4.2.1	Measuring representational alignment (Figure 1b)	23
4.2.2	Bridging representational spaces (Figure 1e)	23
4.2.3	Increasing representational alignment (Figure 1h)	24
4.3	Artificial Intelligence and Machine Learning	25
4.3.1	Measuring representational alignment (Figure 1c)	25
4.3.2	Bridging representational spaces (Figure 1f)	25
4.3.3	Increasing representational alignment (Figure 1i)	26
5	Open problems & challenges in representational alignment	27
5.1	Selecting data and stimuli	27
5.2	Defining, probing, and characterizing representations	28
5.2.1	Eliciting representations from black-box systems	28
5.2.2	The relationship between representation and computation	29
5.3	Measuring alignment	29
5.4	Will representational alignment help improve the alignment of behavior?	30
5.5	Possible risks of representational alignment	30
6	Conclusion	30

1 Introduction

Cognitive science, neuroscience, and machine learning have a long history of studying the kinds of representations that humans, machines, and other biological and artificial information processing systems construct. Numerous factors can affect what representations each system will form, including exposure to and experience with stimuli, diverging training tasks and goals, and differences in architecture – for biological and artificial systems alike. *Representational alignment* refers to the extent to which the internal representations of two or more information processing systems agree. This concept has gone by many names in different contexts, including latent space alignment, concept(ual) alignment, systems alignment, representational similarity, model alignment, and representational alignment [Goldstone and Rogosky, 2002; Kriegeskorte et al., 2008a; Stolk et al., 2016; Peterson et al., 2018; Roads and Love, 2020; Haxby et al., 2020; Aho et al., 2022; Fel et al., 2022; Marjeh et al., 2022; Nanda et al., 2022; Tucker et al., 2022; Muttenthaler et al., 2023a; Bobu et al., 2023; Sucholutsky and Griffiths, 2023; Muttenthaler et al., 2023b; Rane et al., 2023a,b]. In addition, representational alignment has implicitly or explicitly been an objective in many subareas of machine learning including knowledge distillation [Hinton et al., 2015; Tian et al., 2019], disentanglement [Montero et al., 2022], and concept-based models [Koh et al., 2020].

While cognitive scientists, neuroscientists, machine learning researchers, and others actively study representational alignment (see Figure 1 for some curated examples), there is often limited knowledge transfer between these communities, which leads to duplicated efforts and slows down progress. We suggest that this, in part, stems from the lack of a shared, standardized language for describing the full spectrum of research on representational alignment. While frameworks such as Representational Similarity Analysis [RSA; Kriegeskorte et al., 2008a] have been broadly adopted as a means of posing comparisons between two systems, they do not capture the full range of work within representational alignment, nor are they applied alike across all disciplines. Ironically, what is needed is greater representational alignment between researchers in the different disciplines that study representational alignment.

In this Perspective, our goal is to provide a theoretical foundation for research on representational alignment across these different disciplines. We conduct a broad literature review across cognitive science, neuroscience, and machine learning (see Section 2), and find that studies of representational alignment generally consist of the same five key components and three objectives. We use this insight to propose a unifying framework (visualized in Figure 2) for describing research on representational alignment in a common language (summarized in Section 4 and Table 2 which illustrates how a broad spectrum of existing studies are easily interpretable when viewed through the lens of our framework). Crucially, our framework provides a way to synthesize insights across disciplines, paving a path towards making progress on the *three central objectives of representational alignment*: measuring alignment, bringing representations into a shared space (which we alternatively refer to as “bridging representational spaces”), and increasing the alignment between systems. Each of these objectives arises in cognitive science, neuroscience, and machine learning (see Figure 1 for an illustrated example of a study from each field for each central objective).

Objective 1 – Measuring: The objective of *measuring representational alignment* is typically expressed in terms of determining the degree of similarity between the representational structures of two information processing systems [Shepard and Chipman, 1970; Kriegeskorte et al., 2008a]. Thus, measuring representational alignment can offer a principled way to compare two systems at an abstracted, information-processing level, even if those systems appear different at another, often lower, level of detail. This approach can be used to validate one system as a model of another, or to locate cases in which there are differences between two systems. For example, cognitive scientists measure representational alignment between semantic neighborhoods in different languages [Thompson et al., 2020] and different individuals [Marti et al., 2023], as well as between representational maps of musical priors in different cultures [Jacoby and McDermott, 2017; Jacoby et al., 2021b; Anglada-Tort et al., 2023]. Neuroscientists measure alignment between humans and non-human primates to establish homology (i.e., the presence of a “common code” in a particular brain region across species) [Kriegeskorte et al., 2008b], measure alignment between a deep neural network model and neural activity recordings to infer which models best capture aspects of perceptual or cognitive processes [Yamins et al., 2014; Khaligh-Razavi and Kriegeskorte, 2014; Yamins and DiCarlo, 2016; Kell et al., 2018; Conwell et al., 2022], and measure alignment between two or more individuals to determine shared motifs in neural activity [Hasson et al., 2004; Stephens et al., 2010; Hasson et al., 2012a] or how synchronization in neural responses facilitates cooperative behavior [Hasson et al., 2012a; Haxby et al., 2020]. Machine learning researchers measure the representational alignment of deep neural networks including computer vision models with humans to test whether these models learn generalizable human-like representations [Langlois et al., 2021a; Sucholutsky and Griffiths, 2023; Muttenthaler et al., 2023a; Ahlert et al., 2024]. Typically, the two systems are static, and the data used to measure their alignment is paired (i.e., with the same set of stimuli presented to both systems).

Objective 2 – Bridging: The objective of *bringing the representations of two systems into a shared space* (i.e., “bridging” representational spaces) typically involves establishing a correspondence between the representations of the two systems to enable direct comparison. This correspondence unlocks ways of pooling representations across different

systems, and of making more directed comparisons than simple measurements of alignment allow.⁶ Cognitive scientists aim to compare the representations of different individuals along common dimensions that explain those individuals' behaviors [Wish and Carroll, 1974; Hebart et al., 2020]. Neuroscientists align fMRI responses from different individuals into a common space to determine what information is shared across individuals and boost the signal for group-level analyses [Haxby et al., 2011; Chen et al., 2015a; O'Connell and Chun, 2018]. Machine learning researchers learn projections from pre-trained image embedding models and pre-trained text embedding models to a joint space in order to enable multimodal prompting [Gupta et al., 2017; Ramesh et al., 2022; Huang et al., 2022]. Typically, the two systems are still static, the data may or may not be paired, and the representations from at least one of the systems are projected into a new space.

Objective 3 – Increasing: The objective of *increasing representational alignment of two systems* involves trying to make two systems more similar to each other by updating the representations of at least one of the systems. Increasing representational alignment thus can help to make the processing in one system more like another; this can be useful in and of itself (e.g., to improve a computational model of biological system), or as a means to an end (e.g., improved downstream performance). Cognitive scientists try to increase the representational alignment of deep neural networks with humans to better predict human judgments [e.g. Geirhos et al., 2019; Seeliger et al., 2021; Fel et al., 2022; Muttenthaler et al., 2023b]. Neuroscientists optimize deep neural networks to predict brain activity to create computational models of brain function [Schrimpf et al., 2018; Toneva and Wehbe, 2019; Schrimpf et al., 2021; Allen et al., 2022; Khosla and Wehbe, 2022; Conwell et al., 2022; Doerig et al., 2023]. Machine learning researchers train small, efficient student networks to be as similar as possible to a much larger, more expensive, but highly-performant teacher network [Hinton et al., 2015; Phuong and Lampert, 2019; Tian et al., 2019; Muttenthaler et al., 2024a]. Typically, at least one of the systems is dynamic (i.e., it can learn or otherwise update its representations), and the data may or may not be paired data.

Researchers across and beyond these three fields would benefit from progress in each of these areas. We hope that our paper will serve as a call to action for researchers working on representational alignment and catalyze inter-disciplinary collaboration to accelerate progress on these and related problems in the study of information processing systems. To encourage such cross-disciplinary engagement, in addition to proposing a unifying framework for representational alignment in §3 and highlighting key works through the lens of this framework in §4, we also identify key open problems and challenges across disciplines in §5. We believe that resolving these problems would greatly benefit each of the communities that study representational alignment.

2 Background and review

Researchers in cognitive science, neuroscience, and machine learning, study various aspects of representational alignment often from differing perspectives, albeit frequently converging on similar techniques. We next review related literature across these fields to motivate our unifying framework (see Table 2) and identify gaps ripe for future work.

2.1 Cognitive Science

Whether different people have the same representation of the world is a central question in the cognitive sciences. Questions about potential differences in people's experience of the same stimuli go back to Locke [1847], who considered whether it might be possible to identify whether two people had different perceptual experiences of color. In contemporary cognitive science, questions about whether people share the same representations are prominent in cross-cultural and developmental psychology [Berry, 2002; Miller, 2002; Henrich et al., 2010b]. Following the work of Sapir [1968] and Whorf [2012], cross-cultural psychologists ask whether people from different cultures or language groups represent the world in different ways [Berlin and Kay, 1991; Majid et al., 2004; Frank et al., 2008; McDermott et al., 2010; Henrich et al., 2010a; Dolscheid et al., 2013; Majid and Burenhult, 2014; Jacoby et al., 2019; Barrett, 2020; O'Shaughnessy et al., 2023]. Likewise, following Piaget [1973], developmental psychologists consider the possibility that children undergo significant conceptual changes as they develop, creating the possibility of incommensurability between the mental representations of children and adults [Carey, 1988]. Most of these approaches attempt to *measure* alignment between different people, or characterize changes in representations over time [e.g., moral concepts; Kohlberg, 1984; Turiel, 2008]. Typically, cognitive science approaches these questions by treating humans as black boxes, and indirectly inferring their internal representations and algorithms from their patterns of behavior—methods that have the benefit of transferring well across many systems.

⁶Though note that some measurements could be seen as *implicitly* bridging into shared representational spaces; e.g., RSA can be seen as bridging from incompatible representation spaces to compatible kernel-like representations which are defined via distances from a set of basis elements.

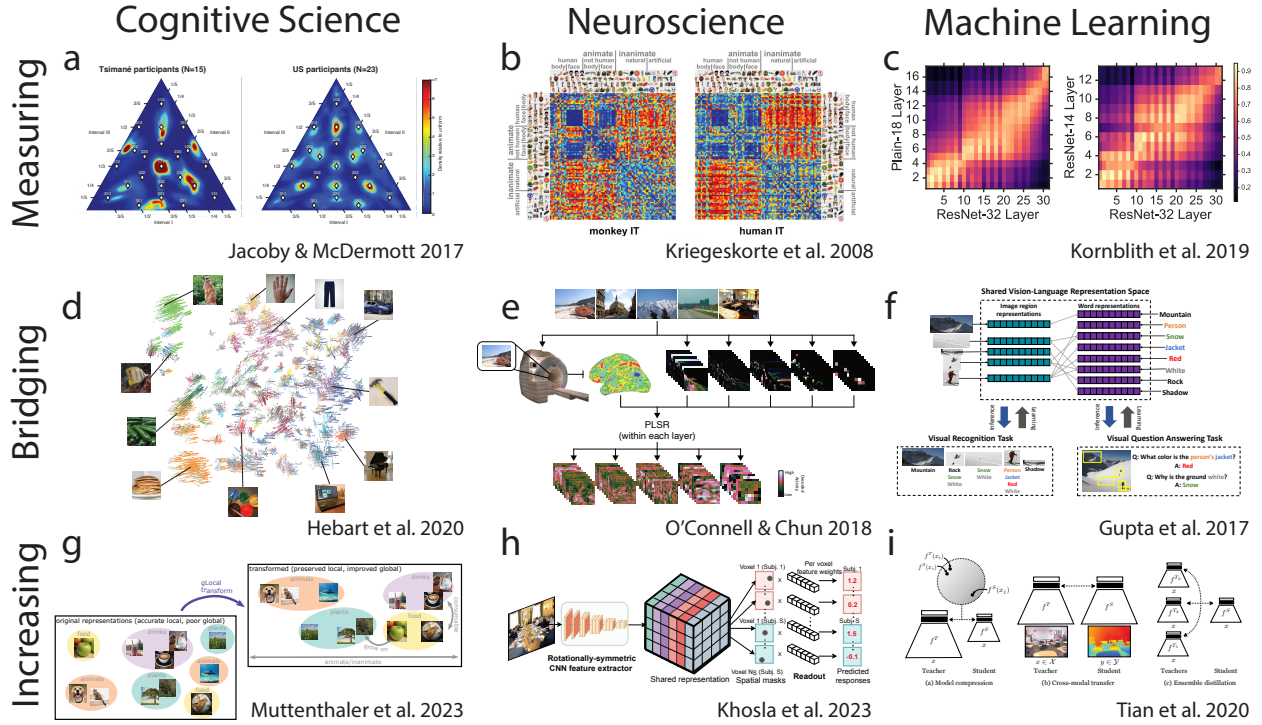


Figure 1: Examples of contemporary representational alignment research in cognitive science, neuroscience, and machine learning. We discuss three types of representational alignment research. *Measuring* representational alignment aims to measure the degree of alignment between two systems as a dependent measure in an experiment (a. Jacoby and McDermott [2017], b. Kriegeskorte et al. [2008b], c. Kornblith et al. [2019]). *Bridging* representational spaces aims to bring representations into a shared space to facilitate some downstream application (d. Hebart et al. [2020], e. O’Connell and Chun [2018], f. Gupta et al. [2017]). *Increasing* representational alignment aims to update the internal representations or measurements of one system to increase its alignment with another system (g. Muttenthaler et al. [2023b], h. Khosla and Wehbe [2022], i. Tian et al. [2019]). (Reproduced with permission from the cited papers.)

2.1.1 Similarity judgments and multidimensional scaling

One tool that has proven useful in exploring these questions is multidimensional scaling (MDS) [Shepard, 1962, 1980]. MDS generally uses participants’ similarity judgments to embed stimuli into a low-dimensional vector space where the distance between stimuli is inversely proportional to their similarity [Ekman, 1954; Tversky, 1977; Kriegeskorte and Mur, 2012; Peterson et al., 2018; Cichy et al., 2019; King et al., 2019; Hebart et al., 2020], though there exist many popular variants that make additional assumptions – like INDSCAL, which enables the study of individual differences [Wish and Carroll, 1974; Roads and Love, 2024] – and enable exciting applications like mapping the changes in children’s representation of numbers as they develop [Miller and Gelman, 1983]. Alternatively, methods like second-order isomorphism rely on analyzing the similarity between two sets of relations among different representations of the same objects – e.g., measuring correlation between pairwise similarity judgments for a set of objects and the degree of featural agreement between that same set of objects [Shepard and Chipman, 1970]. Similarly, contrast models analyze similarity of relations for systems with discrete properties [Shepard and Arabie, 1979; Tversky, 1977; Tenenbaum, 1995].

Representational similarity methods are powerful because they are compatible with systems that are either continuous or discrete, symmetric or asymmetric, hierarchical or non-hierarchical, etc. [Edelman, 1998] though they do leave open the question of how to assess whether two representations really capture the same information about the world. Goldstone and Rogosky [2002] presented a method for answering this question, based on discovering alignments between two different concept systems that were represented by spatial locations. Crucially, their approach did not require that the matching concepts be identified in advance, rather, they were able to extract plausible alignable concepts at the same time as learning the global mapping between the systems. More recent work demonstrates that natural environments support the alignment of everyday concepts [Roads and Love, 2020] and that children’s early concepts appear to exploit these regularities [Aho et al., 2023].

2.1.2 Human-machine alignment

Researchers have also begun to use some of these tools to explore the alignment between humans and machine learning systems. For example, Peterson et al. [2018] used similarity judgments to compare representations of images in humans and machines, finding significant correlations between human similarity judgments and the inner product of the activations at the final layer of convolutional neural networks applied to the same images. Curiously, improving model performance (i.e., behavior) does not guarantee an improvement in alignment [Langlois et al., 2021a]. In fact, object recognition models that perform better often show worse alignment with human judgments [Roads and Love, 2021] and the representation structure of state-of-the-art language models fails to align with key aspects of human representation structures [Suresh et al., 2023]. While Muttenthaler et al. [2023a] found that most computer vision models they tested had low alignment to humans when used out-of-the-box, a learned linear transformation to the human similarity space could minimize that gap — that is, they were able to *increase* representational alignment. However, higher representational alignment does not always translate to improved performance or more aligned behavior. For example, Sucholutsky and Griffiths [2023] discovered a U-shaped relationship between the degree of representational alignment of a teacher and student and their downstream performance on few-shot transfer learning, suggesting that highly aligned and highly misaligned models can generalize effectively from much less data than models with medium degrees of representational alignment with humans.

2.1.3 Semantic representations

Representational alignment also arises in the study of semantic representations [Rogers and McClelland, 2004; Bhatia et al., 2019]. Measuring alignment of the changing representations over learning (and their decay under neurodegenerative disease) between humans and computational and mathematical models [Rogers and McClelland, 2004; Ralph et al., 2017; Saxe et al., 2019] has played an important role in understanding the computational origins of human semantic cognition. Representational alignment has also been used to study the neuro-anatomical basis of these processes [e.g. Ralph et al., 2017], as we discuss below. Recently, research in the alignment of language with other perceptual modalities has been propelled by remarkable advances in large language models which facilitate the quantitative analysis of semantic similarity and provide a rich comparison class against which human behavior can be studied [Bhatia and Richie, 2022; Bhatia, 2023]. For example, Marjeh et al. [2023a] showed that embeddings of textual descriptors can be used to construct good proxies for human similarity judgments across different modalities (visual, audio, and audiovisual) and can perform on par with a large set of domain-specific neural networks that directly process the stimuli. This line of work suggests exciting possibilities for bridging between the representational spaces of computational models and humans.

2.1.4 Alignment across individual participants’ behavior

Research in social psychology and psycholinguistics has also begun investigating alignment across humans. Prior work in these domains, such as the Stereotype Content Model [Fiske, 2018], focused on characterizing group-level phenomena to uncover generalizable insights about how people perceive, understand, and interact with others. For example, distributional semantics investigates bodies of text to understand shared conceptual relations [Boleda, 2020] and average impression ratings are used to study the systemic dehumanization of repressed groups [Haslam and Loughnan, 2014]. Recent work has also highlighted individual differences in the structure of representations across people. For instance, differences arise in people’s representations of basic semantic categories [Hoffman, 2018], such as animals [Marti et al., 2023], as well as representations of social groups, in the form of stereotypes [Xie et al., 2021], and even complex concepts, such as war and taxes [Brandt, 2022]. Differences in representation can have functional consequences for collaboration and communication. For instance, misalignment of word meanings predicts failures of communication across people [Duan and Lupyan, 2023]. Strategies for resolving conflict and disagreement hence need to account for both divergence of opinions and alignment of representations [Oktar et al., 2023].

2.1.5 Alignment across cultures

More generally, the study of representational alignment across different cultures [Berlin and Kay, 1991; Henrich et al., 2010a; Majid et al., 2004; Majid and Burenhult, 2014; Dolscheid et al., 2013; Barrett, 2020; McDermott et al., 2010; Jacoby et al., 2019; O’Shaughnessy et al., 2023; Frank et al., 2008] plays an important role in cognitive science. Cross-cultural research offers an approach to addressing core problems in cognitive science such as 1) what cognitive and perceptual principles underlie the structure of a given representation (e.g. statistical learning vs. physiological constraints)?, and 2) how is meaning shaped and (mis-)communicated across languages and cultures? As a concrete example of the first problem, Jacoby et al. [2021a] analyzed the representation of musical rhythm in a massive cross-cultural dataset comprising 39 participant groups in 15 countries and showed that participants exhibited a universal inductive bias towards discrete rhythm categories at small integer ratios, though the degree in which specific discrete

categories emerged was heavily contingent on culture and the corresponding local musical systems. As for the second problem, Thompson et al. [2020] analyzed the alignment of semantic neighborhoods of 1,010 meanings in 41 languages and showed that semantic domains with high internal structure such as number and kinship tend to be the most aligned, whereas domains such as natural kinds and common actions aligned much less so, suggesting that the meanings of common words are strongly contingent on the culture, geography and history of their users.

2.2 Neuroscience

Neuroscientists often measure representational alignment to evaluate accounts of the functional role of neural activity [Turner et al., 2017; Mars et al., 2021]. The Representational Similarity Analysis [RSA; Kriegeskorte et al., 2008a] framework developed in cognitive neuroscience was initially motivated by a fundamental challenge to this mission: How can we compare heterogeneous internal activities across individuals, species, and biological and artificial kinds, especially in advance of a certain account of how these internal activities produce behavior? RSA and similar frameworks applied in neuroscience answer this question by quantifying a particular notion of similarity between neural activity spaces, including heterogeneous ones. The development of these frameworks for measuring alignment between neural activity spaces reflects a longstanding interest in representational alignment within neuroscience; reciprocally, the frameworks themselves have driven substantial new interest in representational alignment within neuroscience [e.g., Dabagia et al., 2023; Schneider et al., 2023]. Here, we overview some areas of neuroscience, with a focus on cognitive neuroscience, from the perspective of representational alignment.

2.2.1 Alignment across heterogeneous measurements

A foundational problem in neuroscience is defining equivalences across brain regions in different individuals and different species when differing measurement tools are in use. For example, in animals, electrophysiology (e-phys) and microscopy-based methods are commonplace, whereas in humans functional magnetic resonance imaging (fMRI), electroencephalogram (EEG), and other non-invasive methods are common. In RSA, data (neural responses, model activations, behavior, etc.) are converted to a representational dissimilarity matrix (RDM) capturing the pairwise differences between all stimuli in the dataset and abstracting away from the space in which representations are defined. These two RDMs are then correlated to determine whether the two spaces capture the same similarity structure. This technique has been applied broadly in several domains of cognitive neuroscience; one of its earliest empirical applications was to establish structural similarities between rhesus macaque and human inferotemporal (IT) cortex [Kriegeskorte et al., 2008b]. The same set of stimuli, consisting of common objects, were shown to monkeys undergoing e-phys recording and humans undergoing fMRI scanning. Using RSA, Kriegeskorte et al. [2008b] found aligned representations between monkey and human IT. RSA-based techniques have also been used for cross-modal alignment of neural responses collected with different modalities. Cichy et al. [2014] derived RDMs over time from human MEG and monkey electrophysiology recordings and RDMs over space from human fMRI responses, then used RSA to align MEG and e-phys signals over time, and MEG and fMRI signals over space and time, capturing spatio-temporal activation patterns not measurable with either modality alone [e.g., Mack et al., 2016].

2.2.2 Alignment across individuals

Representational alignment can be used to bridge neural responses across individuals into a common space for subsequent analysis. Standard fMRI preprocessing involves warping to a common anatomical space, but this approach leads to a loss of information due to individual differences in brain morphology. An alternative set of techniques aims to instantiate a joint representational space in order to alleviate the loss of information in anatomical alignment. The most prominent of these functional alignment techniques is hyperalignment [Haxby et al., 2011, 2020], which applies Procrustes transforms to map individual responses to a common space. Variants of hyperalignment further refine the transformation class using functional connectivity or spatial response patterns [Busch et al., 2021]. Analogous approaches that make use of contemporary deep learning systems map individual responses to the internal activity space of a deep neural network [Horikawa and Kamitani, 2017; O’Connell and Chun, 2018; Shen et al., 2019; Horikawa and Kamitani, 2022; Sexton and Love, 2022]. A distinct approach, shared response modeling, uses a probabilistic framework to isolate individual-specific and shared components in neural responses into a common parameterization [Chen et al., 2015b], which can be applied to improve searchlight analysis of fMRI data [Kumar et al., 2020]. Once all individual responses are aligned in the same representational space, individual responses can be compared or averaged to perform a group-level analysis. Furthermore, secondary models trained on the shared representational space can be applied to brain data in a zero-shot fashion to accomplish decoding feats such as object classification [Horikawa and Kamitani, 2017; Sexton and Love, 2022], eye movement prediction [O’Connell and Chun, 2018], and image reconstruction [Shen et al., 2019].

2.2.3 Alignment between brain activity and model systems

Representational alignment between brain regions and computational models has been used to study details of the relationship between computational models and the anatomy and function of neural processes. For example, computational models of human semantic representation [Rogers and McClelland, 2004] have been linked to the neuroanatomy of human multimodal integration — in particular, the idea that anterior temporal regions produce semantic representations that are aligned across modalities [Pobric et al., 2010], which play a key role in binding representations across modalities [Ralph et al., 2017]. Neuroscientists have also started to investigate the utility of artificial intelligence (AI) systems as computational models in a variety of cognitive tasks. In vision, early work by Yamins et al. [2014] revealed a hierarchy of alignment between mid- and late-vision regions in rhesus macaques and mid- and late-layers in neural networks optimized for image classification. Contemporaneously, in language research, work by Wehbe et al. [2014b] revealed significant word-by-word alignment between human brain activity evoked by reading a story and representations from early language models (e.g., LSTMs). Progress in AI in the last 10 years has spurred much research in this area, revealing a high degree of brain alignment for more recent models in the domains of vision [Cichy et al., 2016; Zhuang et al., 2021; Konkle and Alvarez, 2022] and language [Khaligh-Razavi and Kriegeskorte, 2014; Schrimpf et al., 2018; Jain and Huth, 2018; Hollenstein et al., 2019; Kubilius et al., 2019; Toneva and Wehbe, 2019; Schrimpf et al., 2021; Toneva, 2021; Caucheteux and King, 2022; Goldstein et al., 2022; Kumar et al., 2023b].

2.2.4 Alignment for hypothesis testing

Neuroscientists often use representational alignment to test hypotheses about information processing in the brain. For example, representational alignment has been used to contribute to mechanistic explanations of task-dependent processing in vision [Cukur et al., 2013; Wang et al., 2019] and language [Toneva et al., 2020; Oota et al., 2022] by investigating which of a number of possible candidate hypotheses aligns best with brain responses to a new stimulus. Using these approaches, neuroscientists have hypothesized about the processing of information related to a wide range of stimulus properties, from manipulability and size of individual objects [Sudre et al., 2012] to changes in the content of continuous visual input [Isik et al., 2018]. In language, where much current AI progress is due to the development of performant language models, scientists have used representational alignment to claim that a key mechanism that aligns the representations in language models and brains is the next-word prediction objective function [Schrimpf et al., 2021; Caucheteux and King, 2022; Goldstein et al., 2022]. However, it is still unclear whether next-word prediction is necessary or simply sufficient to obtain the degree of observed representational alignment [Merlin and Toneva, 2022; Antonello and Huth, 2022], and other scientists have shown that the alignment is due in part to joint syntactic processing [Oota et al., 2023] and lexical-level semantics [Kauf et al., 2023].

2.2.5 Alignment for stimulus selection or design

Representational alignment can be used to select data for use in stimulus presentations. For example, “controversial” stimuli, which *decrease* measured alignment between models, can be tested on humans or animals to distinguish between competing mechanistic accounts of neural activity [Groen et al., 2018; Golan et al., 2022] or accounts of behavior [Golan et al., 2020]. As another example, Tuckute et al. [2023] used representational alignment between human neural representations and transformer language models to design unusual stimuli that drive and suppress activity in the human language network. These works demonstrate that representational alignment can be used for optimization in *stimulus* space. While these methods are only starting to be explored in neuroscience as well as cognitive science, we believe they open exciting new directions for representational alignment research more broadly (see §5.1).

2.2.6 Alignment as communication

Spoken language has been construed as a form of representational transmission in which a speaker uses language to instantiate a representation in a listener [Hasson et al., 2012b]; this construal is supported by experiments demonstrating representational alignment between speakers and listeners during narration [Stephens et al., 2010; Silbert et al., 2014; Liu et al., 2017]. Using fMRI, speaker-listener neural alignment is found across a diverse range of brain regions spanning temporal, parietal, auditory, and prefrontal cortices and only emerges during successful communication, when the listener understands the speaker’s utterance [Stephens et al., 2010]. In a more naturalistic design, adults’ and infants’ neural responses were measured simultaneously in an unstructured play environment; in this context, neural alignment, especially in the prefrontal cortex, emerges during joint – but not independent – play [Piazza et al., 2020]. Even in the absence of a structured social task, non-verbal social cues such as eye contact and smiling induce neural alignment between two interacting individuals [Koul et al., 2023]. Representational alignment between individuals also appears to play a role in pedagogy, as evidenced by a correlation between improved teacher-student neural alignment and improved learning outcomes [Meshulam et al., 2021; Nguyen et al., 2022].

2.3 Artificial intelligence and machine learning

Machine learning researchers use representational alignment in diverse ways from measuring the relationship between models to interpreting their performance, bridging between models to fuse (potentially diverse) representation spaces into a single, canonical one, learning more robust and general representations by increasing representational alignment, and mimicking human-like biases and behaviors, among others. In this section, we provide a non-exhaustive overview of some of these use cases.

2.3.1 Model-to-model alignment

There has been interest in maximizing model-to-model alignment in the machine learning community for many years [Hinton et al., 2015; Kim and Rush, 2016; Phuong and Lampert, 2019; Cho and Hariharan, 2019; Tung and Mori, 2019]. Such questions have taken on a newfound urgency with the rise of large-scale pre-trained foundation models [Caron et al., 2021; Oquab et al., 2024; Roth et al., 2024; Huh et al., 2024; Muttenthaler et al., 2024a], which are difficult and expensive to train but can serve as useful priors for other, smaller models.

In many cases, increasing alignment begins with *measuring* model-to-model alignment — often with RSA — in an attempt to characterize how different learning objectives [Lindsay et al., 2021; Muttenthaler et al., 2023a], tasks [Hermann and Lampinen, 2020], or simply differences in random initialization [Mehrer et al., 2020] may lead to differences among model representations. These differences can potentially be deleterious to reliability, for instance, when one needs to understand when a similar model may fail.

However, differences between models can also be desirable; indeed, there are many cases where one would like to measure and even *decrease* alignment between models. For instance, to use multiple models in an ensemble, one is likely interested in diverse models that have very different representations [Lakshminarayanan et al., 2017; Fort et al., 2019; Pang et al., 2019; Wu et al., 2021]. If diversity is not specifically encouraged, different deep learning models end up being highly aligned with each other because they tend to converge to similar local minima [Mania et al., 2019; Geirhos et al., 2020b; Meding et al., 2021; Moschella et al., 2023; Huh et al., 2024].

Multimodality. Combining several input modalities into a single learning system has a long history [Mori et al., 2000]. Deep learning allows us to combine neural architectures designed for different input modalities, and to optimize them jointly. For example, an early such model by Karpathy and Fei-Fei [2015] combined a text representation from an LSTM [Hochreiter and Schmidhuber, 1997] with an image representation from a Convolutional Neural Network [LeCun and Bengio, 1998], and jointly optimized them to produce descriptive captions of images. Other models such as CLIP [Radford et al., 2021] explicitly aim to align visual and textual embeddings using a contrastive learning objective [Sohn, 2016; van den Oord et al., 2018]. Fusing architectures designed for a single modality can both be used to transform from one modality into another one, e.g., to align visual inputs and their textual descriptions to caption an image [Karpathy and Fei-Fei, 2015; Xu et al., 2015], to learn a combined embedding space for vision and language [Radford et al., 2021; Zhai et al., 2023], to generate images from a textual description [Mansimov et al., 2016; Ramesh et al., 2021; Saharia et al., 2022; Yu et al., 2022] or to combine text, images, and speech into a single prediction model [Kaiser et al., 2017]. All of these models go beyond just bridging the representations learned by their constituent sub-modules, but rather fine-tune them to optimize the alignment between them.

The techniques involved in this research are often similar to those we see in related fields. For example, a recent article employed cross-model alignment [Moayeri et al., 2023] to align image representations with text representations. The technique—which essentially boils down to linear regression—is the same as the one often employed in neuroscience when bridging representational spaces, where a linear mapping from one representation space to another is learned from data. Other works in machine learning have used representational similarity itself as *relative* representation space, which can allow translating between the latent spaces of different models with no training [Moschella et al., 2023; Maiorca et al., 2023; Norelli et al., 2022].

Knowledge distillation. Knowledge distillation [Hinton et al., 2015; Phuong and Lampert, 2019] is another way of aligning the representation spaces of two models. The goal of knowledge distillation is to distill the (prior) knowledge of a teacher – usually a large model – about a dataset into a student network – usually a smaller model than the teacher. Instead of training the student network on the labels associated with the data, the student is optimized to match the probabilistic outputs [Hinton et al., 2015], the representational geometry [Cho and Hariharan, 2019], or the pairwise similarities [Tung and Mori, 2019] of a (larger) teacher network. Knowledge distillation can be seen as a form of neural compression or a regularization technique. It has seen successes in various fields of ML, such as machine translation [e.g., Kim and Rush, 2016] and Computer Vision [e.g., Park et al., 2019; Cho and Hariharan, 2019]. Part of its success is likely attributable to the use of soft labels which have been shown to yield tighter class clusters [Müller et al., 2019] and improved data efficiency [Sucholutsky and Schonlau, 2021; Collins et al., 2022; Sucholutsky et al., 2023; Muttenthaler et al., 2024a] compared to hard labels. In contrast to soft labels, hard labels rigidly assign zero probability mass to all

but the correct class. Moreover, the probabilistic outputs of a teacher network convey implicit information about the relationships between the classes in the data rather than serving the purpose of replacing the zero entries of hard labels with non-zero probabilities that contain no class-relationship information at all [cf., Müller et al., 2019; Muttenthaler et al., 2024b].

2.3.2 Learning human-like representational geometries

There has recently been growing interest in the machine learning community in increasing alignment between human and neural network representational spaces [e.g., Peterson et al., 2018, 2019; Attarian et al., 2020; Roads and Love, 2021; Storrs et al., 2021b; Marjeh et al., 2022; Muttenthaler et al., 2023a; Fu et al., 2023] either to obtain a better understanding of the (dis-)similarities between these spaces [e.g., Muttenthaler et al., 2023a; Mahner et al., 2024] or improve the representational structure of neural networks for increasing their generalizability [e.g., Muttenthaler et al., 2023b, 2024a]. Muttenthaler et al. [2023b] attempt to increase representational alignment to align the outputs of computer vision models with human odd-one-out choices for the same set of images, thereby altering the original behavior of the models to improve their downstream task performance on various few-shot learning and anomaly detection tasks. Fu et al. [2023] manipulate the representation spaces of neural nets to align their local similarity structure with that of human observers and, as a consequence, improve nearest neighbor retrieval and local structure. Fel et al. [2022] transform the representations of neural networks to better match the visual strategies used by humans, in doing so improving object categorization performance of neural network models.

Although this line of research is still developing, increasing representational alignment offers vast potential in improving the outputs of systems at a relatively low computational cost — learning a linear transformation [Peterson et al., 2019; Attarian et al., 2020; Muttenthaler et al., 2023a,b] or fine-tuning the parameters of an information processing function [Toneva and Wehbe, 2019; Schwartz et al., 2019; Fu et al., 2023; Muttenthaler et al., 2024a; Sundaram et al., 2024] is much cheaper than optimizing these parameters from scratch — while at the same time contributing to understanding the factors that drive the alignment between systems [Konkle et al., 2022; Fel et al., 2022; Muttenthaler et al., 2023a].

2.3.3 Interpretability and explainability

Human-interpretability is often emphasized in efforts to understand neural networks’ representation spaces. Much of this work can be understood as attempting to *bridge* between neural network representational spaces and lower-dimensional or conceptually simpler spaces that human researchers can understand. These ideas date back to early representation learning work at the intersection of AI and cognitive science [Hinton et al., 1986], and were reinvigorated by recent findings in representation learning in language and other areas [Baehrens et al., 2010; Bengio et al., 2012; Mikolov et al., 2013a]. In particular, the fact that word representation spaces of words learned by predicting co-occurrence [Mikolov et al., 2013a; Pennington et al., 2014] allowed analogical reasoning by simple linear algebra operations (e.g., king – man + woman = queen), attracted a great deal of interest and investigations [Ethayarajh et al., 2018].

Some efforts have been interested in interpreting the behavior of artificial neural networks at the level of individual neurons [Bau et al., 2017; Olah et al., 2018; Geirhos et al., 2023], while others investigated how to represent and use human-specified concepts in a neural network for post-hoc interpretability [Bach et al., 2015; Samek et al., 2017a; Kim et al., 2018; Lapuschkin et al., 2019; Samek et al., 2019, 2017b]. Embedding or learning human-aligned concepts during training has also been an active area of research [Koh et al., 2020; Zarlenga et al., 2022; Fu et al., 2023; Muttenthaler et al., 2024a] as well as discovering new meanings of learned representations using linear vectors [Yeh et al., 2020; Ghandeharioun et al., 2021]. Another notable attempt at alignment is mechanistic interpretability – the effort to find a *procedure* in a network (i.e., how a network *does* X rather than just a *concept* Y). For example, finding circuits [Olah et al., 2020; Nanda et al., 2023] that qualitatively align with semantic meaning (e.g., curves) could provide insights.

2.3.4 Behavioral alignment

Behavioral alignment is a form of alignment that aims specifically at aligning the output, or behavior, of one system (often a computational model) with another (often humans). Behavioral alignment can also be seen as an instance of representational alignment, insofar as output behaviors are produced by a representation (e.g., an image embedding) followed by a mapping from representation to output (a softmax layer, a k-nearest-neighbor classifier, etc.) [LeCun et al., 2015]. However, the relationship between penultimate representations and behavioral outputs is not one-to-one. Two systems that have very different representations and mappings could still produce the exact same output/behavior [cf. Hermann and Lampinen, 2020], just like very different sorting algorithms (say, “quicksort” and “bubblesort”) produce the same output. The reverse is not the case: if there are differences in behavior, this implies differences in

either the mapping, the representation, or both. If the mapping is fixed, perfect behavioral alignment is a necessary condition of perfect representational alignment.⁷

Behavioral comparisons between deep neural networks and human perception have seen substantial interest over recent years. For instance, contrasting error patterns of different systems (a behavioral measure), ideally at the fine-grained individual stimulus level [Green, 1964], can be a powerful way to learn about differences in underlying representations [Rajalingham et al., 2018; Geirhos et al., 2020a]; and numerous severe differences between neural networks and human perception have been discovered using behavioral experiments [Baker et al., 2018; Peterson et al., 2018; Geirhos et al., 2018, 2019; Peterson et al., 2019; Feather et al., 2019; Jacobs and Bates, 2019; Serre, 2019; Geirhos et al., 2020a; Hermann et al., 2020; Lonnqvist et al., 2020; Funke et al., 2021; Geirhos et al., 2021; Storrs et al., 2021b; Kumar et al., 2021; Abbas and Deny, 2022; Bowers et al., 2022; Dong et al., 2022; Malhotra et al., 2022; Huber et al., 2022; Jaini et al., 2023; Muttenthaler et al., 2023a; Wichmann and Geirhos, 2023; Kumar et al., 2023a; Muttenthaler et al., 2024a]. Similarities in behavior can also serve as clues to phenomena happening under the surface both in neural networks and in humans. Rane et al. [2023c] finds a correlation between neural networks’ performance in learning visual words and the age at which children acquire those same words, ultimately showing that both are capturing human judgments of how *concrete* or *abstract* a word is. Such behavioral insights often serve as a tool for identifying relevant phenomena that are then further characterized in interpretability and representational alignment work.

Ultimately, different communities weigh output and representational alignment differently. In neuroscience, for instance, representations are often a central research focus, while robotics and reinforcement learning focus more on output. At present, one widely used form of behavioral/output alignment is Reinforcement Learning from Human Feedback (RLHF) [Ziegler et al., 2019; Christiano et al., 2017; Ouyang et al., 2022; Casper et al., 2023], which uses human ratings of an AI system’s behavior to learn a separate model which scores new outputs of the system, in an attempt to better align the model’s outputs towards those which a human would prefer. However, what the right kind of feedback to elicit from people is for building reward model remains an open question [Casper et al., 2023; Collins et al., 2024a; Wu et al., 2023; Liang et al., 2024].

2.3.5 Value alignment

Behavior-focused methods are commonly used for the daunting goal of value alignment [Taylor et al., 2016; Gabriel, 2020; Kirchner et al., 2022]: the goal of building a model that aligns with the values of humans, often with the hope that such a model could broadly benefit humanity. Value alignment is notoriously difficult to define and measure. Thus, researchers often evaluate the alignment of model and human behavioral outputs or task performance [Hadfield-Menell et al., 2017; Hubinger et al., 2019]. However, monitoring output alignment is insufficient for predicting whether a model will continue to be aligned with humans, or merely appears that way in a constrained evaluation setting, which is important for detecting the emergence of potentially charged behavior [Chan et al., 2023]. Similarly, researchers often use behavior-focused methods like RLHF or constitutional AI to increase alignment [Christiano et al., 2017; Bai et al., 2022]. However, value alignment may be difficult or impossible to achieve through these methods [Eckersley, 2018; Casper et al., 2023].

Could representational alignment offer new possibilities for value alignment? Zou et al. [2023] pursue value alignment via “representation engineering” — finding representational dimensions that are related to valued behaviors like honesty [cf. Burns et al., 2022], and then manipulating those representations to increase the models’ tendency to exhibit these behaviors. This strategy hints that aligning the representational structure of models with that of humans could offer benefits for value alignment and all affected downstream tasks—at the very least as pre-conditioning for more targeted interventions.

2.3.6 Human-robot interaction

In robotics, we often seek to build robots that perform tasks specified by human users. To do so, robots need to rely on a representation of salient *aspects* of the world that capture the end user’s desired task [Bobu et al., 2023]. For example, to make a cup of coffee, the robot must learn features that the human user (implicitly or explicitly) cares about, e.g., brand and flavor of coffee as well as the cup orientation and the cup’s distance from obstacles, as part of its representation of the task. There are currently two dominant approaches for learning human task representations: one that *explicitly* builds in structures for learning salient task aspects, e.g. feature sets or graphs [Levine et al., 2010; Daruna et al., 2021; Bobu et al., 2021; Peng et al., 2023], and one that *implicitly* extracts them by directly mapping the inputs to the desired robot behavior, e.g. end-to-end approaches like the identity representation [Finn et al., 2016, 2017; Torabi et al., 2018; Xu et al., 2019]. Each of these approaches comes with its own set of trade-offs.

⁷If alignment is not perfect, the relationship between representation and behavior or output depends on the mapping’s properties, for instance, whether it preserves monotone relationships. Typically, alignment is best thought of as a spectrum rather than a binary concept.

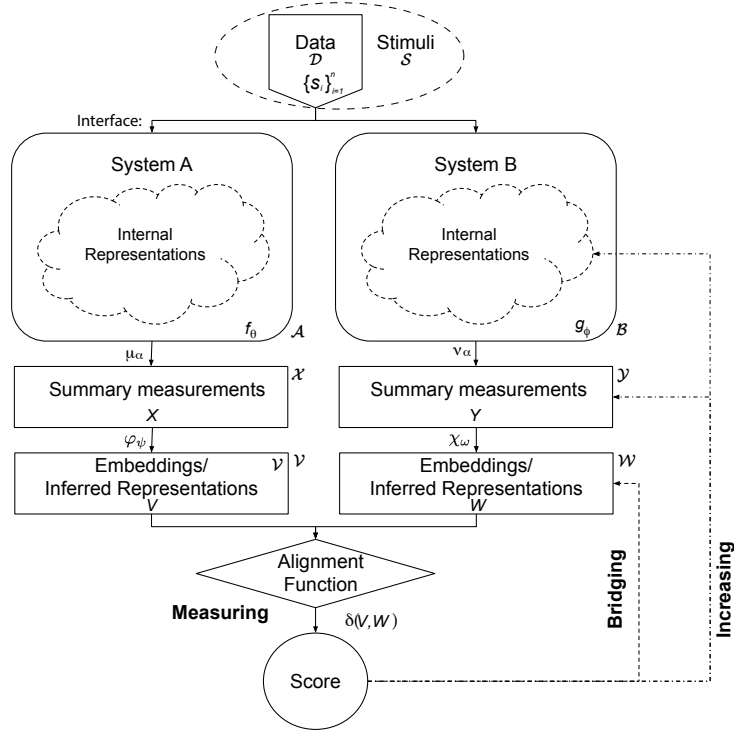


Figure 2: A general framework for conducting and describing representational alignment research. Most studies of representational alignment involve five components that researchers can control: **data** is presented via interfaces to the two **systems**. The systems form internal representations of the data and researchers take **measurements** of the systems and map them to some **embedding** space to try to infer the representations. An **alignment function** is then applied to those inferred representations to compute a single alignment score. These studies typically have one of three objectives: **measuring** the representational alignment between the two systems (i.e., the alignment score), **bridging** between two different representational spaces by finding a shared embedding space, or **increasing** the representational alignment between the two systems either by updating their internal representations (e.g., via learning) or how they are measured.

On the one hand, specifying explicit task structure is helpful for capturing relevant task aspects like those described above. However, the structure baked in explicitly is *useful only if correct*: without the right inductive bias, robots may misinterpret the humans’ guidance for the task or execute undesired behaviors [Bobu et al., 2020]. On the other hand, neural networks can implicitly learn task structure in a manner that is faster and less burdensome on the designer, albeit while potentially containing irrelevant information in their representations and correspondingly capturing spurious correlations [Zhang et al., 2018; Rahmatizadeh et al., 2018; Rajeswaran et al., 2018]. Recent trends to address this tendency include *feature subset selection methods* [Cakmak and Thomaz, 2012; Bullard et al., 2018; Luu-Duc and Miura, 2019], *clever ways to efficiently collect human data* (e.g., via YouTube or VR) or *reuse past data sets* from the robot’s lifespan [Baker et al., 2022]. However, there is still no guarantee that these data will be representative of the end user’s behavior. Rather than treating humans as static data sources, these methods may benefit from including them as (weak) supervision signals in the alignment process.

3 Framework for representational alignment

As we have illustrated, representational alignment is an active and fruitful area of research. However, analyzing the literature from each of the three fields reviewed above makes it clear that representational alignment is a fragmented area of research, reminiscent of the Tower of Babel. Disparate definitions and insufficient knowledge sharing across fields have led to the rediscovery of the same ideas under different names, the repetition of similar mistakes, and underutilized opportunities for cross-disciplinary collaboration. To unify these fragmented communities, we propose a general formalism of representational alignment – a lingua franca that we hope will accelerate progress on open problems in representational alignment research.

3.1 High-level overview

Conceptually, we propose that there are five major components to most studies of representational alignment that researchers have control over (see Figure 2 for a schematic description):

- (a) The *data* used for alignment, which could be sensory data (a subset of a stimulus space, such as an image set for vision) or higher-level cognitive content. Throughout this paper, we assume that the data is a static sample (e.g., simple stimuli like images). However, this framework can be generalized to cases where systems interact dynamically with an environment, in which case data is replaced by environment states.
- (b) The *systems* whose representational alignment is being measured (e.g., humans, animals, deep neural networks, etc.). A system interfaces with the data. This interface is partially controlled by the experimenter (i.e., the experimenter can choose which stimuli to present and how to present them) and partially a component of the system (e.g., for humans this can be the periphery of the visual system). Once the stimulus is internalized in the system (e.g., as neural activity in the human brain), it forms an internal representation (for example the neuronal activity through the entire brain during preception). The internal representations of many system states are latent. For human participants, this might be the latent state of their brain as they view an image. In the case of a machine learning system, however, the system can be accessed in principle. An example would be the entire network activation pattern in response to a given stimulus. While we assume that all systems of interest in representational alignment studies can take data as input and form representations of it, we note that in some cases those systems may also have intrinsic or extrinsic objectives that require them to produce outputs (e.g., when the study involves monitoring a system while it performs a task like classification), that those outputs may in some cases affect the data distribution (e.g., by acting on the environment as mentioned above), and that the objectives themselves may affect the internal representations (e.g., task-dependent representations).
- (c) The *measurements* that are being collected about each of the systems (e.g. behavioral similarity judgments, activation of a region for fMRI, hidden layer activations for a neural network, etc.). Note that the process of measurement also includes the potentially-different processes required for presenting stimuli to the two systems (e.g., playing audio to a human, versus presenting its spectrogram to a convolutional network).
- (d) The *embeddings or inferred representations* that are being extracted or (re)constructed from each system.
- (e) The *alignment function* that is being used to measure the degree of alignment between the embeddings.

Studies focused on measuring alignment typically just involve computing an alignment score from the alignment function. Meanwhile, studies focused on bridging representational spaces or increasing alignment usually involve using this score as a feedback signal on how to update the embedding function (in the bridging case) and the internal representations or their measurements (in the increasing case). We visualize this framework in Figure 2.

As a concrete example, consider the work by Kriegeskorte et al. [2008b] highlighted in Panel b of Figure 1. Say we want to measure the representational alignment of two *systems*: a rhesus macaque monkey and a human. In this case, the *data* over which we want to measure alignment might be a collection of scene images. In both monkeys and humans, the state of the two systems would be the activation pattern in all the neurons while they observe the image. This state cannot be directly accessed, but only through *measurement*. For the monkey, this could be the neural responses in the inferotemporal cortex measured with electrophysiology, and for the human, we could define it as neural responses in the inferotemporal cortex measured with fMRI. A widely used summary statistic of the joint representation of all stimuli is the representational dissimilarity matrix (RDM), which defines the representational geometry for each system. The RDM contains the pairwise distances between the activity patterns representing the stimuli, and provides an embedding in which representational geometries can be compared. The RDM comparator (or *alignment function*) can be the cosine similarity, a correlation coefficient, or a metric such as the angle two RDMs span. This approach is known as representational similarity analysis; e.g., Kriegeskorte et al., 2008a; Diedrichsen et al., 2020; Schütt et al., 2023).

We believe that our framework provides a simple, general language for clearly communicating the methodology and results of representational alignment studies in a way that is accessible to many researchers. In Table 2, we present diverse examples of literature from various fields summarized by the components of the framework. The remainder of this section goes into more detail on how to mathematically formalize descriptions of each of the components and decisions that go into a study of representational alignment. In Section 4, we lay out in detail how the nine highlighted examples from Figure 1 can be described in the language of our formalism.

3.2 Formalizing representation spaces

Figure 2 shows a schematic description of our framework which contains the following components:

Data. Let $\mathcal{D} := \{s_i\}_{i=1}^n$ be a dataset of n trials, where each $s_i \in \mathcal{D}$ is a stimulus that can be processed by any information processing function. Note that a dataset is not restricted to a set of single elements. Each element by itself

can be either an image, a set of images (e.g., triplets), a string, a sequence (of strings or other realizations of time steps), a video (or frame thereof), etc. In practice, we note that systems can interact with the environment (for example, in the case of an agent in a game environment) in which case the data is the states of the environment and is dynamic rather than static. Most of the case studies in this paper concern the simplified case in which the systems do not modify the environment.

Systems. We assume that there exist two systems A and B , which can be described in terms of functions that map inputs (s_i) to their internal states $f_\theta := S \mapsto \mathcal{A}$ and $g_\phi := S \mapsto \mathcal{B}$, where \mathcal{A} and \mathcal{B} denote the space of all possible states of systems A and B , respectively. For notational simplicity, we abstract away the interface layer, which may affect how the stimuli are presented to each system, as part of θ and ϕ . We also note that in some studies, the systems may not only be (passively) processing the stimuli but will be actively engaging with them in a certain task (i.e., producing outputs). Upon performing this task, the systems may modify the environment from which the data is drawn. For simplicity, we treat the environment as stationary and assume that the task context is part of the stimuli.

Measurements. For each of the systems A and B we obtain a summary of the measurement $X := \mu_\alpha(f_\theta(s_i), \dots, f_\theta(s_n)) \in \mathcal{X}$ and $Y := \nu_\beta(g_\phi(s_i), \dots, g_\phi(s_n)) \in \mathcal{Y}$, respectively. This is obtained by sequentially applying the functions f_θ and g_ϕ (returning the state of the systems for each of the stimuli) to all of the n trials and then passing the output through some (possibly) parameterized functions μ_α and ν_β . The parameters α and β will often reflect hyperparameters of the measurement process (e.g., in machine learning this parameter could specify which layer activations are being measured from; in human fMRI this can represent parameters of the scanning procedure as well as parameters of processing the raw fMRI data). However, in some cases (typically in machine learning), we simply directly use the entire internal state, and thus $\mu_\alpha = \nu_\beta = \mathbb{1}$ are the identity maps. In this case, $X := (f_\theta(s_i), \dots, f_\theta(s_n)) \in \mathcal{X}^{n \times p}$ and $Y := (g_\phi(s_i), \dots, g_\phi(s_n)) \in \mathcal{Y}^{n \times d}$ are the two-dimensional tensors of stacked measurements of lengths p and d respectively.

Embeddings. To map categorical behavior to a continuous number space, denoise a set of high-dimensional measurements (that potentially have a low “signal-to-noise” ratio), or essentially any other reason for why we would need a mapping from the output space (e.g., neural activity) of the information processing functions to another — possibly lower-dimensional — embedding space (e.g., real-numbered values), we can optionally define a function that transforms the measurements into an embedding space where similarity can be quantified. We assume the existence of two embedding functions, $\varphi_\psi := \mathcal{X} \mapsto \mathcal{V}$ and $\chi_\omega := \mathcal{Y} \mapsto \mathcal{W}$, which can be either linear or non-linear. We also assume that these functions have two optionally learnable arrays of parameters ψ and ω .⁸ We emphasize that the embedding function(s) are not necessary but may be advantageous in specific situations. One such scenario includes *increasing representational alignment* [cf., Muttenthaler et al., 2023a,b, see §4 for further examples where this may be desirable]. Note that if we do not have an embedding step we can simply assume $\varphi_\psi = \chi_\omega = \mathbb{1}$ are the identity map and do not change the summary measurements.

For simplicity, we consider flattening the representations in all stages into vectors (denoted as lowercase letters in boldface). However, we emphasize that in general, the measurements can have any shape and type — e.g., they may be matrices, graphs, programs, or strings — as long as the two sets of measurements admit an appropriate measure of alignment.

3.3 Measuring alignment

There exists a function $\delta : \mathcal{V} \times \mathcal{W} \mapsto \mathbb{R}$ that we can apply to the embedded vectors \mathbf{v} and \mathbf{w} such that $\delta(\mathbf{v}, \mathbf{w}) \in \mathbb{R}$ yields a scalar value that quantifies the degree of alignment. For simplicity, we define $\delta(\mathbf{v}, \mathbf{w}) = \Delta_{\mathbf{v}, \mathbf{w}}$ to be a dissimilarity measure where $\Delta_{\mathbf{v}, \mathbf{w}} = 0$ implies that $\mathbf{v} = \mathbf{w}$, and, therefore the embedding vector \mathbf{v} is fully aligned with \mathbf{w} .

General conditions. The following conditions have to be satisfied for any function δ that measures representational alignment.

- *Measurable.* δ must be a measurable (dis-)similarity function. However, we do not restrict δ to be a metric because symmetry is not a necessary condition to assess the alignment between two embedding spaces.
- *Scalar-valued.* To meaningfully quantify representational alignment, we restrict δ to map to a scalar. Hence, $\delta : \mathcal{V} \times \mathcal{W} \mapsto \mathbb{R}$. For simplicity, in the remainder of this section, for \mathbf{v} and \mathbf{w} , we focus on (flattened) vector representations.

⁸Dimensionality reduction techniques such as SVD or PCA can serve as valid (optional) embedding functions even though they do not consist of any learnable variables. However, one may be interested in learning a particular (non-)linear transformation for which learnable variables are necessary (e.g., to increase alignment).

- *(Dis-)similarity-quantifying*. The scalar-valued output of δ is required to quantify a (dis-)similarity. For convenience, we generally use the notation of a dissimilarity measure, where δ has a lower bound at zero at which the two embedding spaces are equivalent. Hence, $\delta : \mathcal{V} \times \mathcal{W} \mapsto [0, \infty) \subset \mathbb{R}$. The advantage of a dissimilarity measure is that it can be viewed as an error function or a loss that can be minimized. However, alignment functions could also measure similarity (see §3.3.1).

In the following, we will elaborate on properties of alignment functions we think are useful to distinguish from one another. We distinguish *similarity-quantifying* from *dissimilarity-quantifying*, *descriptive* from *differentiable*, and *symmetric* from *directional* alignment. A valid alignment function must satisfy at least one of two properties that we contrast in each case. It must be (dis-)similarity quantifying; descriptive, differentiable, or both; and symmetric or directional. We list examples of alignment functions in Table 1 but a more in-depth survey can be found in [Klabunde et al., 2023].

3.3.1 Similarity or dissimilarity quantifying

Any alignment function δ has to quantify the (dis-)similarity between two representations of a set of stimuli (or pieces of cognitive content). Although any similarity can in principle be transformed into a dissimilarity and vice versa, *similarity-quantifying* and *dissimilarity-quantifying* alignment functions have distinct advantages and disadvantages.

Similarity-quantifying. Similarity-quantifying alignment functions are often used for describing the relationship between two sets of measurements \mathcal{X} and \mathcal{Y} . Among the set of similarity-quantifying alignment functions exist functions that are bounded in both directions. The upper and lower bounds provide reference points that can ease interpretation. Examples include the Pearson correlation, the Spearman rank correlation, the cosine similarity, and any centered or normalized inner product. For these functions, we have $\delta : \mathcal{V} \times \mathcal{W} \mapsto [-1, 1] \subset \mathbb{R}$. The bounded nature of these functions renders them particularly insightful for describing a relationship between representations, as its output is easily interpretable.

Dissimilarity-quantifying. For all dissimilarity-quantifying alignment functions, $\delta : \mathcal{V} \times \mathcal{W} \mapsto [0, \infty) \subset \mathbb{R}$, holds. That is, dissimilarity-quantifying alignment functions have a lower bound at 0 where we know that two representation spaces are equivalent. However, it is difficult to put an upper bound on these functions. Thus, dissimilarity-quantifying functions can be more difficult to interpret. Information-theoretic measures such as the cross-entropy or relative entropy and ℓ_p -norms of the difference between two embedding vectors \mathbf{v} and \mathbf{w} , e.g., $\|\mathbf{v} - \mathbf{w}\|_2^2$, are common examples of dissimilarity-quantifying alignment functions [e.g., McClure and Kriegeskorte, 2016]. Although their outputs can be difficult to interpret and are not recommended to merely describe the relationship between two sets of measurements, they are useful error functions that can be minimized by gradient descent. In addition, it is possible to use a dissimilarity-quantifying function (e.g. cross-entropy) to maximize a similarity-quantifying function (e.g., cosine similarity) as is often done in contrastive representation learning [Chen et al., 2020; Radford et al., 2021; Muttenthaler et al., 2023b].

3.3.2 Descriptive or differentiable

An alignment function must be *descriptive* or *differentiable* or both. These properties are not mutually exclusive, but in general, we either want to use δ for describing or increasing representational alignment.

Descriptive. A *descriptive* alignment function does not need to be differentiable. Such a function mainly serves to quantify the (dis-)similarity between the two sets of measurements X and Y . Hence, descriptive alignment functions are used when researchers aim to *measure* alignment and establish the conditions and system setups that cause representational alignment to emerge rather than aiming to *increase* alignment (see §5 for a more detailed discussion). Descriptive alignment functions are often *symmetric*, as it is desirable to obtain the same measurement of representational alignment if we change the order of the representations: $\delta(\mathbf{v}, \mathbf{w}) = \delta(\mathbf{w}, \mathbf{v})$. An example of a descriptive alignment function used in Representational Similarity Analysis [Kriegeskorte et al., 2008a] is the rank-correlation between RDMs as measured by Kendall’s τ_a [Nili et al., 2014] or ρ_a [Schütt et al., 2023]). Rank correlation is attractive for model-comparison in computational neuroscience because it is invariant to nonlinear monotonic transforms of the RDMs, but it is not differentiable. A descriptive and differentiable alternative would be the Pearson RDM correlation coefficient.

Differentiable. The objective to *increase* alignment of a model representation to another model or a brain region motivates the use of a differentiable alignment function. Generally, any differentiable alignment function can be regarded as an error function or loss that can be minimized, such that $\mathcal{L}_{\text{alignment}} := \delta(\mathbf{v}, \mathbf{w})$. If we want to minimize $\mathcal{L}_{\text{alignment}}$ using a gradient, then δ must be restricted to the set of differentiable functions over the embedding spaces \mathcal{V} and \mathcal{W} . For all differentiable alignment functions, we consider the settings of *representational transformation* and *representational fine-tuning*, respectively, to minimize $\mathcal{L}_{\text{alignment}}$.

Representational transformation: Representational transformation refers to the case where a model’s parameters are frozen and a transformation of its representation is learned as an add-on to the model. An example is the use of linear encoding models fitted to map from neural network model representations to single-neuron responses measured in animals in neuroscience. Representational transformation requires choosing a level of flexibility for the transformation. Although taking the representation spaces as is (without any transform) may be descriptive (especially in the field of Machine Learning [c.f., Muttenthaler et al., 2023a]), manipulating them allows us to compare spaces that are less obviously similar (e.g., by ranking which ones are *relatively* more similar to each other). Thus, there exists a spectrum of transformations, ranging from the identity function (i.e., no transformation), over linear transformations, up until non-linear functions under a constraint such as Lipschitz continuity, weight bounds, or anything else that constrains the output space of the transform to not move too far from the original space.

In representational transformation, we consider two sets of stacked embedding vectors $\mathbf{V} := (v_1, \dots, v_n)^\top$ and $\mathbf{W} := (w_1, \dots, w_n)^\top$ to be fixed and immutable tensor representations for the n measurements in the data. Here, we do not need access to any of the two sets of source parameters θ or ϕ . We learn a transformation $h_\Omega(\varphi_\psi(\mathbf{x}_i))$ for one of the two embedding spaces. Here, for simplicity, we choose the representation space \mathbf{V} . Hence, we are interested in the gradient matrix of all first-order derivatives, $\nabla \mathcal{L}(\Omega)$, where we optimize the bounded parameters Ω of the transformation by solving the following minimization problem,

$$\arg \min_{\Omega} \mathcal{L}_{\text{alignment}}(h_\Omega(\mathbf{V}), \mathbf{W})$$

In this case, the alignment function is defined to be a dissimilarity measure that can be minimized and used as an error function rather than a similarity measure that has to be maximized.

Representational fine-tuning: In representational fine-tuning, we are interested in differentiating through the entire model and update its parameters. Examples include the student-teacher setup in machine learning [e.g., Hinton et al., 2015; Tung and Mori, 2019; Oquab et al., 2024; Muttenthaler et al., 2024a] and nonlinear systems identification approaches in computational neuroscience [e.g., Wehbe et al., 2014a; Fyshe et al., 2015; Seeliger et al., 2018; Toneva and Wehbe, 2019; Schwartz et al., 2019]. To perform representational fine-tuning, two conditions have to be satisfied:

1. *Source parameter fixing:* First, we have to fix one of the two sets of parameters θ or ϕ which can be seen as a special case of directional alignment (see below). Here, only one of the sets of measurements X or Y is subject to change and the other set remains unaltered.
2. *Source parameter availability:* Second, the parameters or *sources* θ or ϕ , depending on which of the two sets we want to fix, have to be readily available. That is, we need access to the set of parameters that we want to update. Although theoretically possible $\forall f \in \mathcal{F}$, in practice it is unlikely to have access to the synapses of a human or monkey brain after obtaining measurements from them. Thus, this step is relevant only when the goal is to alter the parameters of an artificial intelligence system.

Let us assume that both of the above conditions are met. We fix the parameter set ϕ , assume access to θ , and evaluate the dissimilarity of V from W . That is, we want to differentiate through δ , φ_ψ , and f_θ to minimize $\Delta_{V,W}$ and consequently updating the source parameters θ . As such, we are interested in the first-order derivatives with respect to all of those learnable variables. Note that representational fine-tuning is not particularly useful if we are interested in whether two sets of measurements X and Y are (dis-)similar because, in high-dimensional spaces, it is likely that there exists a non-linear transformation (e.g., a multi-layered neural network) that can map one space to the other. For representational fine-tuning to be useful, we must test the *generalizability* of the learned mapping to held-out measurements of the target system (here, Y), thereby satisfying at least one of the following two conditions

- (a) *Few-shot fine-tuning.* We must limit the number of training examples used for fine-tuning the set of parameters. So, if n denotes the number of training examples used for fine-tuning, n should be small; how small exactly depends on the particular task and research question.
- (b) *Regularization.* We must put an upper bound on the quantity $\|\theta - \theta^*\|_2$ such that $\sup \|\theta - \theta^*\|_2 < \epsilon$, where θ is the set of original source parameters and θ^* is the set of fine-tuned source parameters and ϵ is a small real-numbered value. That is, we do not want the fine-tuned parameters to move too far away from the original source parameters.

Differentiable alignment functions are specifically of interest for the goal of *increasing* alignment but under certain conditions may also be useful for *bridging* the representation spaces of systems.

3.3.3 Symmetric or directional

An alignment function δ can either be *symmetric* or *directional*; a function cannot be both at the same time. We recommend symmetric alignment functions over directional alignment functions for describing the relationship between two information processing systems if the goal is “just” to *measure* representational alignment rather than bridging their representation spaces or increasing their alignment.

Symmetric. For any *symmetric alignment* function, $\delta(V, W) = \delta(W, V)$ must hold. Changing the order of W and V as inputs to δ is not allowed to change the (dis-)similarity between the embedding spaces W and V . symmetric similarity functions may be desirable for describing the relationship between \mathcal{X} and \mathcal{Y} rather than optimizing for aligning the two spaces. Examples of symmetric alignment functions that are widely used are the inner product, the cosine similarity, or the Pearson correlation, of which the latter two are modified versions of the former.

Directional. *Directional alignment* functions define *alignment in terms of one space*. For these functions, $\delta(V, W)$ has to be defined in terms of one of the two embedding spaces V or W . Hence, any directional alignment function either measures the dissimilarity of V from W or, the other way around, it measures the dissimilarity of W from V . Most information-theoretic measures are directional alignment functions of which common examples are the discrete versions of the cross-entropy and the relative entropy (or KL divergence), where discrete KL divergence is defined as

$$\delta(\sigma(\varphi_\psi(\mathbf{x}_i)), \sigma(\chi_\omega(\mathbf{y}_i))) := \text{KL}(\sigma(\varphi_\psi(\mathbf{x}_i)), \sigma(\chi_\omega(\mathbf{y}_i))) := -\sum_{j=1}^m \sigma(\varphi_\psi(\mathbf{x}_i))_j \log\left(\frac{\sigma(\chi_\omega(\mathbf{y}_i))_j}{\sigma(\varphi_\psi(\mathbf{x}_i))_j}\right), \quad (1)$$

where $\sigma : \mathcal{V} \cup \mathcal{W} \mapsto [0, 1]$ is a function that transforms the embedding representations into probability distributions (e.g., softmax) and the condition $m = z$ must be satisfied. That is, $\sigma(\varphi_\psi(\mathbf{x}_i))$ and $\sigma(\chi_\omega(\mathbf{y}_i))$ must have the same shape. Information-theoretic directional alignment functions are generally not recommended for describing the relationship between V and W because they are difficult to interpret. However, they are useful error functions for minimizing the dissimilarity between two sets of representations and therefore often used for solving general machine-learning problems.

3.3.4 Different measures afford different inferences

In the points above, we have outlined different attributes that a measure of alignment may have. But which measure should we use? Rather than advocating for a particular measure, our goal is to communicate that different measures are sensitive to different features, and therefore afford different inferences. Indeed, we have been less strict in our analysis than some prior works [e.g. Williams et al., 2021]; for example, we do not require that a measure satisfy the mathematical criteria of a metric (e.g. we accept asymmetric measures). However, these distinct features can each be advantageous in certain situations.

As a simple conceptual example, suppose that one system encodes signal A in 99% of its neurons and signal B in 1%, whereas another encodes signal A in 1% and signal B in 99%. Regression would quantify these systems as identical, despite most of their activity serving different purposes. RSA would classify them as very dissimilar, despite them representing exactly the same information.

More generally, symmetric measures of alignment can be more intuitive, but also elide important distinctions, such as which of two systems contains more information, or which is noisier (though see Duong et al. 2023). Asymmetric measures can provide more insight into features like these, but can lead to other kinds of failures (as above). Likewise, measures that do not fit parameters may underestimate how similar two systems are, if they use slightly different coding schemes that capture on the same information. However, sometimes methods that fit parameters — even using methods as simple as linear regression — can be too flexible [Conwell et al., 2022]. Depending on the measures we use, we may arrive at very different conclusions. Thus, where possible, it is useful to consider multiple measures of similarity and evaluate how conclusions generalize (see §5.3 for further discussion). Alignment measures are an active area of research, including work on measures that more naturally capture relationships between representations that incorporate unit-level tuning without being restricted to it [Khosla and Williams, 2023], measures that can be reliable over small datasets [Pospisl et al., 2024], and frameworks that bridge between different measures [Harvey et al., 2023].

3.3.5 What does it take to unambiguously specify a similarity measure?

Comparing similarity scores across studies can be challenging due to variability in naming and implementation conventions [Cloos et al., 2024b]. As an illustrative example, consider the similarity measure CKA. CKA was defined by Kornblith et al. [2019] in terms of a quantity called the Hilbert-Schmidt Independence Criterion (HSIC).

$$\text{CKA}(\mathbf{K}, \mathbf{L}) = \frac{\text{HSIC}(\mathbf{K}, \mathbf{L})}{\sqrt{\text{HSIC}(\mathbf{K}, \mathbf{K})\text{HSIC}(\mathbf{L}, \mathbf{L})}}$$

Alignment function (δ)	(Dis-)Similarity	Descriptive/Differentiable	Symmetric/Directional
Centered Kernel Alignment (CKA)	Similarity	Descriptive & differentiable	$\delta(x, y) = \delta(y, x)$
Pearson RDM correlation	Similarity	Descriptive & differentiable	$\delta(x, y) = \delta(y, x)$
RDM rank correlation coefficient ρ_a	Similarity	Descriptive	$\delta(x, y) = \delta(y, x)$
whitened unbiased RDM cos-similarity	Similarity	Descriptive & differentiable	$\delta(x, y) = \delta(y, x)$
RDM cos-similarity	Similarity	Differentiable	$\delta(x, y) = \delta(y, x)$
Mutual Information (MI)	Similarity	Descriptive	$\delta(x, y) = \delta(y, x)$
ℓ_2 -distance	Dissimilarity	Differentiable	$\delta(x, y) = \delta(y, x)$
KL-divergence (KL)	Dissimilarity	Differentiable	$\delta(x, y) \neq \delta(y, x)$
Cross-entropy (CE)	Dissimilarity	Differentiable	$\delta(x, y) \neq \delta(y, x)$

Table 1: Examples of alignment functions and their properties.

CKA is most commonly written using the linear kernel $\mathbf{K} = \mathbf{V}\mathbf{V}^\top$, $\mathbf{L} = \mathbf{W}\mathbf{W}^\top$ and the estimator for HSIC originally proposed by Gretton et al. [2005] as in section 4.3.1.

$$\text{HSIC}_{\text{Gretton}}(\mathbf{K}, \mathbf{L}) = \frac{1}{(n-1)^2} \text{Tr}(\mathbf{K}\mathbf{H}\mathbf{L}\mathbf{H})$$

where $\mathbf{H}_n = \mathbf{I}_n - \frac{1}{n}\mathbf{1}\mathbf{1}^\top$ is the centering matrix. However, this estimator is biased [Gretton et al., 2005]. Subsequently, Song et al. [2007] proposed an unbiased estimator of HSIC.

$$\text{HSIC}_{\text{Song}}(\mathbf{K}, \mathbf{L}) = \frac{1}{n(n-3)} \left[\text{Tr}(\tilde{\mathbf{K}}\tilde{\mathbf{L}}) + \frac{\mathbf{1}^\top \tilde{\mathbf{K}} \mathbf{1} \mathbf{1}^\top \tilde{\mathbf{L}} \mathbf{1}}{(n-1)(n-2)} - \frac{2}{n-2} \mathbf{1}^\top \tilde{\mathbf{K}} \tilde{\mathbf{L}} \mathbf{1} \right]$$

where $\tilde{\mathbf{K}}_{ij} = (1 - \delta_{ij})\mathbf{K}_{ij}$ and $\tilde{\mathbf{L}}_{ij} = (1 - \delta_{ij})\mathbf{L}_{ij}$ are the kernel matrices with diagonal entries set to zero. Additionally, Lange et al. [2023] proposed an estimator that can be both written as an inner product and that has low bias.

$$\text{HSIC}_{\text{Lange}}(\mathbf{K}, \mathbf{L}) = \frac{2}{n(n-3)} \langle \text{tril}(\mathbf{H}\mathbf{K}\mathbf{H}), \text{tril}(\mathbf{H}\mathbf{L}\mathbf{H}) \rangle_F$$

where $\text{tril}(\mathbf{A})$ denotes the vector formed by the elements of the lower triangular part of matrix \mathbf{A} , excluding the diagonal, and $\langle \cdot, \cdot \rangle_F$ denotes the Frobenius inner product.

These choices for the HSIC estimator are not just subtleties of the implementation but can have a large impact on the final similarity score [Murphy et al., 2024; Cloos et al., 2024b]. As this example shows, in order to more unambiguously identify a particular implementation of CKA we would need to also specify how HSIC is estimated. Additionally, there are other variations to specify, for example, Williams et al. [2021] proposed taking the arccosine of CKA to satisfy the axioms of a metric; Ding et al. [2021] used 1-CKA; Huh et al. [2024] used a local version of CKA that considers only the top-k nearest neighbors. To facilitate comparisons across different studies and make explicit the implementation choices underlying a given code repository Cloos et al. [2024a] created, and are continuing to develop, a Python package that benchmarks and standardizes similarity measures. The goal of this repository is to gather existing implementations of similarity measures with a common naming convention and customizable interface, ultimately making it easier for the community to make comparisons across studies.

4 Representational alignment in diverse communities

The goal of our framework is to introduce a common language that can highlight similarities in the approaches and goals across a diversity of fields concerned with the alignment of intelligent systems. To demonstrate how our framework fulfills this role, in this section, we describe how representational alignment plays a role in specific research projects (those visualized in Figure 1). For each of the highlighted examples, we present a short conceptual summary followed by a formal mathematical description structured according to the framework. We hope that illustrating *how* alignment is studied by different communities will enable readers to see connections between topics, and hopefully empower them to transfer best practices from other research communities to their own research topics. Table 2 provides a concise summary of how additional related literature fits into the unifying framework.

4.1 Cognitive Science

4.1.1 Measuring representational alignment (Figure 1a)

Jacoby and McDermott [2017] use a serial reproduction paradigm [Griffiths and Kalish, 2005] to elicit rhythm priors from participants. In this paradigm participants are initially introduced with a simple rhythm that is randomized from

Research paper(s) \ Setting	DATA		SYSTEMS		ALIGNMENT	
	Trials	A	B	Objective	$\delta(x, y)$	
199; 273	Images	Monkey (brain)	Human (brain)	measuring	RDM rank correlation	
187; 127; 34; 35; 374	Images	Human (brain)	Human (behavior)	measuring	RDM rank correlation	
273; 172; 127	Images	Human (brain)	Human (behavior)	measuring	RDM linear combination	
372	Images	Mouse (brain)	Mouse (brain)	measuring	RDM optimal transport	
180	Images	Monkey (brain)	DNN	measuring	RDM rank correlation	
5; 60; 410; 69; 295	Images	Human (brain)	DNN	measuring	RDM rank correlation	
87; 184; 180	Images	Human (brain)	DNN	measuring	RDM linear combination	
364; 276; 277; 305; 245; 246; 201; 149; 148	Images	Human (behavior)	DNN	measuring	RDM rank correlation	
187; 127; 34; 35; 374	Images	Human (brain, behavior)	DNN	measuring	RDM rank correlation	
274	Images	Human (brain)	DNN	measuring	CKA	
371	Images	Human (behavior)	DNN	measuring	RDM optimal transport	
288; 32	Images	Human (brain, behavior)	DNN	measuring	Task accuracy	
364	Images	Human (behavior)	DNN	measuring	Pearson RDM correlation	
370; 271	Images	Human (behavior)	DNN	measuring	Procrustes measure	
222	Images, Video	Human (behavior)	DNN	measuring	Euclidean distance	
249; 246	Audio, Video	Human (behavior)	DNN	measuring	Pearson RDM correlation	
78; 79	Video	Human (brain)	DNN	measuring	RDM rank correlation	
384; 79	Text	Human (brain)	DNN	measuring	RDM rank correlation	
16	Text	Human (behavior)	Human (behavior)	measuring	RDM rank correlation	
245; 249; 246	Text	Human (behavior)	LLM	measuring	Pearson RDM correlation	
226; 228	Text	Human (behavior)	LLM	measuring	KL-divergence	
369	Text	Human (behavior)	LLM, multi-modal	measuring	Procrustes measure	
373	Odorants	Human (behavior)	LLM, multi-modal	measuring	Pearson RDM correlation	
178	Colors	Human (behavior)	Human (behavior)	measuring	RDM optimal transport	
194; 39	Images	DNN	DNN	measuring	CKA	
232; 145	Images	DNN	DNN	measuring	Pearson RDM correlation	
270	Images	DNN	DNN	measuring	RDM cos-similarity	
297	Time series	RNN	RNN	measuring	Angular Procrustes	
377	Text	LLM	LLM	measuring	Pearson correlation	
412; 283; 43; 44	Images	Monkey (brain)	DNN	bridging	ℓ_2 -distance	
62	Images	Monkey (brain)	RNN	bridging	ℓ_2 -distance, CKA	
349	Images	Monkey (brain), Human (brain)	DNN	bridging	Task accuracy	
313	Images	Mouse (brain)	DNN	bridging	cosine distance	
181; 180; 69; 363; 128; 192; 359; 183	Images	Human (brain)	DNN	bridging	ℓ_2 -distance	
311	Phosphenes	Human (brain)	DNN	bridging	ℓ_2 -distance	
285; 395; 380	Images, Text	Human (brain)	DNN, LLM, multi-modal	bridging	ℓ_2 -distance	
374	Images	Human (brain, behavior)	DNN	bridging	RDM rank correlation	
183	Images	Human (brain)	DNN	bridging	Pearson correlation	
362	Images	Human (behavior)	DNN	bridging	RMSE	
383	Images	Human (behavior)	DNN	bridging	Pearson RDM correlation	
227	Images	Human (behavior)	DNN	bridging	Cross-entropy	
196	Images	RL agent	RL agent	bridging	RDM rank correlation	
225	Images	Human (behavior)	Diffusion model	bridging	Cosine similarity	
254; 129; 208; 108	Video	Human (brain)	DNN	bridging	ℓ_2 -distance	
343; 9; 10	Text	Human (brain)	LLM	bridging	ℓ_2 -distance	
401; 228; 16	Text	Human (behavior)	LLM	bridging	ℓ_2 -distance	
116	Images	DNN	DNN	bridging	CKA	
95	Images	Monkey (brain)	DNN	increasing	RDM cos-similarity	
72	Images	Monkey (brain)	DNN	increasing	CKA	
276; 277	Images	Human (behavior)	DNN	increasing	Cross-entropy	
66; 65; 366	Images	Human (behavior)	DNN	increasing	ℓ_2 -distance	
104; 368	Images	Human (behavior)	DNN	increasing	Hinge Loss	
278	Images	Human (behavior)	DNN	increasing	KL-divergence	
157	Images	DNN	DNN	increasing	Cross-entropy	
150; 55; 387; 307; 365	Images	DNN	DNN	increasing	KL-divergence	
252	Images	DNN	DNN	increasing	CCA	
398	Images	DNN	DNN	increasing	Procrustes measure	
233	Text	LLM	LLM	increasing	ℓ_2 -distance	

Table 2: Examples of research articles from cognitive science, neuroscience, machine learning, and other fields, that relate to representational alignment. This table is intended to illustrate the broad interdisciplinary nature of the field of representational alignment, rather than to provide a complete overview of the literature. It explicitly features studies that were accepted to the Re-Align workshop at ICLR [Grant et al., 2024]. We encourage readers to send us suggestions for making this table more comprehensive.

the possible “universe” of simple rhythmic patterns. Participants reproduced the pattern, and the average reproduction became the stimulus for a new iteration. After repeating the process a fixed number of times, the experimenter identifies the density of responses within the stimulus space. In this way, categories emerge as high-density response areas. One can show that this paradigm, under certain experimentally verifiable conditions, converges to a sample from the perceptual prior over the relevant domain [Griffiths and Kalish, 2005; Langlois et al., 2021b]. Jacoby and McDermott [2017] showed that categories identified with this method overlap with integer ratios, and that they differ between speech and musical stimuli. A big advantage of this paradigm is that it can be used to study non-experts and participants with no musical experience as it relies on minimal verbal instructions. A large-scale cross-cultural replication of this work [Jacoby et al., 2021a] tested the paradigm with 39 groups from 15 countries. The results showed categorical

prototypes in all cultures that are near simple integer ratios. However, the weight (importance) of categories varied substantially from place to place. This is in contrast to another follow-up work where American and Canadian children were tested [Nave et al., 2024]. Here, there were small differences between adults and children underscoring the idea that rhythm presentations are learned at an early age.

- **Data \mathcal{D} :** Let $\mathcal{D} := \{(i_1, i_2, i_3) \mid i_1 + i_2 + i_3 = T, \min(i_1, i_2, i_3) > f\}$ be all possible 3-interval rhythms, where T is the total duration, $i_1, i_2,$ and i_3 are the three intervals and f is the minimal possible interval (so that we avoid presenting rhythms that are too short).
- **System A:** Let f_θ be a representative group of human subjects who perform the task. The analysis is done at the group level and the output is a probability function (kernel density) of the three-interval space.
 - **Its measurements X :** Human tapping response for n randomly sampled initial seeds from \mathcal{D} . Data was collected from a group of m participants. Participants perform the serial reproduction process and repeat the initial seed. The seed becomes the input of new iterations. After a finite number of iterations (typically $K = 5$) the process stops and a new block begins with another random seed.
 - **Its embedding V :** V is the kernel density estimate for the data from the last two iterations.
- **System B:** This function stems from the same system as the function f_θ but for another group of people — hence, g_ϕ — with corresponding measurements Y and embeddings W . For example, the first system can be participants from the US and the second system can be participants from the Bolivian Amazon.
- **Differentiable and symmetric alignment function $\delta(V, W)$:** $\text{JSD}(V\|W) = \frac{1}{2} \sum V(\log V - \log M) + \frac{1}{2} \sum W(\log W - \log M)$ is the Jensen–Shannon divergence computed over the two kernel density functions where $M = \frac{1}{2}(V + W)$ is a mixture distribution of the two kernels.

4.1.2 Bridging representational spaces (Figure 1d)

Hebart et al. [2020] collected 1.46 million human triplet odd-one-out judgments to generate a sparse positive similarity embedding [SPOSE; Zheng et al., 2019] underlying these similarity judgments. In contrast to much previous work that has manually identified candidate dimensions, focused on small, non-representative representational spaces, or yielded low interpretability, Hebart et al. [2020] revealed 49 interpretable embedding dimensions in a data-driven fashion for a broad set of 1854 object categories that were highly predictive of single trial choice behavior. Instead of comparing representations using representational similarity analysis [Kriegeskorte et al., 2008a] or similar measures, this approach of identifying core representational dimensions allows for direct comparison of candidate dimensions that determine representational alignment. Therefore, it provides a pathway for interpretable representational alignment between different individuals or modalities.

- **Data \mathcal{D} :** Let $\mathcal{D} := (\{i_s, j_s, k_s\})_{s=1}^n$ be a dataset of n sets of three objects where each object in the triad is an image. Let m denote the number of distinct objects in this dataset where $m = 1854$.
- **System A:** Let f_θ be a representative human participant who outputs a discrete (odd-one-out) choice for each triplet in the data. The analysis is done at the participant level with choices pooled across participants, and the output is an odd-one-out choice for each triplet in the data.
 - **Its measurements X :** Asking each human participant to select the odd-one-out object for each triplet in the data yields $X := (\{a_s, b_s\} \mid \{i_s, j_s, k_s\})_{s=1}^n$, a human-response dataset of n ordered tuples of discrete choices. Note that f_θ is a non-deterministic function and thus its measurements are sampled from different human participants (the responses might as well be aggregated).
 - **Its embedding V :** Let $\varphi_\psi(x)$ be a differentiable embedding function with learnable variables $\mathbf{W}_X \in \mathbb{R}^{m \times p}$ where $p \ll m$ and \mathbf{W} is initialized with Gaussian random variables. Let $S_{ij} := \mathbf{w}_i^\top \mathbf{w}_j$ indicate the similarity between object representations $\mathbf{w}_i, \mathbf{w}_j$ in the p -dimensional embedding space where $S_X \in \mathbb{R}^{m \times m}$ is the affinity matrix of all pairwise object similarities. Thus, the embedding $V := W$ is the learnable variables.
- **System B:** There is no function g_ϕ in Hebart et al. [2020] but in principle one can imagine this function to stem from the same system as the function f_θ but for another group of people (e.g., different cultural groups). However, it might as well stem from other systems, such as neural network representations or brain data. In the latter cases, no triplets are directly accessible, but we can easily generate them from the measurements of the function g_ϕ , where the measurements $\mathbf{Y} := (g_\phi(s_1), \dots, g_\phi(s_m)) \in \mathbb{R}^{m \times d}$ are a stacked matrix of m

object representations⁹ from which we can infer a similarity matrix (e.g., $S_Y := \mathbf{Y}\mathbf{Y}^\top$). Subsequently, we can sample triplets from S_Y and learn the low-dimensional SPoSE embedding using these generated triplets.

- **Differentiable and directional alignment function $\delta(X, \mathbf{W})$:**

$$\delta(X, \mathbf{W}) := \arg \min_{\mathbf{W}} \frac{1}{n} - \sum_{s=1}^n \log p(\{a_s, b_s\} | \{i_s, j_s, k_s\}, \mathbf{W}) + \lambda \|\mathbf{W}\|_1,$$

where $p(\{a_s, b_s\} | \{i_s, j_s, k_s\}, \mathbf{W}) = \exp(\mathbf{w}_a^\top \mathbf{w}_b) / (\exp(\mathbf{w}_i^\top \mathbf{w}_j) + \exp(\mathbf{w}_i^\top \mathbf{w}_k) + \exp(\mathbf{w}_j^\top \mathbf{w}_k))$ and λ is a hyper-parameter that determines the strength of the sparsity-inducing ℓ_1 -regularization.

Similarly, Muttenthaler et al. [2022] used the same set of measurements in combination with a similar alignment function (same data log-likelihood function but different regularization) for learning a more robust version of the embedding \mathbf{W} using approximate Bayesian inference. They used a *spike-and-slab* Gaussian mixture prior instead of vanilla ℓ_1 -regularization and learned a matrix for the variance over the human odd-one-out choices in addition to the (mean) embedding matrix, demonstrating that this more appropriate than the above deterministic version when n is small.

4.1.3 Increasing representational alignment (Figure 1g)

Muttenthaler et al. [2023b] use human triplet odd-one-out choices to increase the alignment between neural network representation and human object similarity spaces. The human odd-one-out choices were collected using large-scale online crowd-sourcing in a previous study [Hebart et al., 2020]. The objective in Muttenthaler et al. [2023b] was to align a neural network function f_θ with the behavior of human participants g_ϕ where g_ϕ is not a deterministic function and thus the human behavior is aggregated across multiple participants. That is, their goal was to perform *representational transformation* (see §3.3.2) from the neural network representation space into the human object similarity space. Therefore, they used a *directional* and *differentiable* alignment function which — as we have seen in §3.3 — are both desirable but not necessary properties of an alignment function.

- **Data \mathcal{D} :** Let $\mathcal{D} := (\{i_s, j_s, k_s\})_{s=1}^n$ be a dataset of n sets of three objects where each object in the triad is an image. Let m denote the number of distinct objects in this dataset where $m = 1854$.
- **System A:** Let $f_\theta : \mathbb{R}^{H \times W \times C} \mapsto \mathbb{R}^p$ be a deterministic neural network function that maps an image to a p -dimensional vector representation (in its penultimate layer/image encoder space).
 - **Its measurements X :** Applying f_θ to each image in the data yields $\mathbf{X} := \mu_\alpha(f_\theta(s_1), \dots, f_\theta(s_m)) \in \mathbb{R}^{m \times p}$, a stacked matrix of m (penultimate layer) object representations.
 - **Its embedding V :** Let $S_{ij} := \mathbf{x}_i^\top \mathbf{x}_j$ be the similarity between object representations $\mathbf{x}_i, \mathbf{x}_j$ in the original representation space and $V_{ij} = \varphi_\psi(X_{ij}) := (\mathbf{W}\mathbf{x}_i + \mathbf{b})^\top (\mathbf{W}\mathbf{x}_j + \mathbf{b})$ indicate the similarity between object representations $\mathbf{x}_i, \mathbf{x}_j$ in the transformed representation space. So, $\mathbf{V} \in \mathbb{R}^{m \times m}$ is the affinity matrix of all pairwise object similarities in the transformed space. Here, the transformation matrix $\mathbf{W} \in \mathbb{R}^{p \times p}$ and the bias vector $\mathbf{b} \in \mathbb{R}^p$ are both learnable variables (optimized via SGD).
- **System B:** Let g_ϕ be a representative human participant who outputs a discrete (odd-one-out) choice for each triplet in the data.
 - **Its measurements Y :** Asking each human participant to select the odd-one-out object for each triplet in the data yields $Y := (\{a_s, b_s\} | \{i_s, j_s, k_s\})_{s=1}^n$, a human-response dataset of n ordered tuples of discrete choices. Note that g_ϕ is a non-deterministic function and thus its measurements are sampled from different human participants.
 - **Its embedding W :** There is no embedding function. Here, $W = Y$, a human response dataset of discrete odd-one-out choices.
- **Differentiable and directional alignment function $\delta(V, W)$:**

$$\delta(V, W) := \arg \min_{\mathbf{W}, \mathbf{b}} \frac{1}{n} - \sum_{s=1}^n \log p(\{a_s, b_s\} | \{i_s, j_s, k_s\}, V) + \lambda \left\| \mathbf{W} - \left(\sum_{j=1}^p \mathbf{W}_{jj} / p \right) \mathbf{I} \right\|_{\mathbb{F}}^2,$$

where $p(\{a_s, b_s\} | \{i_s, j_s, k_s\}, \mathbf{V}) = \exp(\mathbf{v}_a^\top \mathbf{v}_b) / (\exp(\mathbf{v}_i^\top \mathbf{v}_j) + \exp(\mathbf{v}_i^\top \mathbf{v}_k) + \exp(\mathbf{v}_j^\top \mathbf{v}_k))$ and λ is a hyper-parameter that determines the strength of the ℓ_2 -regularization.

⁹The dimensionality d of the object representations may or may not be collapsed. It may be collapsed if the representations are inferred from brain data or from a convolutional layer of a CNN which are both generally of tensor format.

Using the above (constrained) alignment function plus an additional contrastive learning objective that preserves the local similarity structure from the original neural network representation space allowed the authors to obtain a human-aligned representation space that showed increased representational alignment with human perception and better downstream task performance on various computer vision tasks [Muttenthaler et al., 2023b].

4.2 Neuroscience

4.2.1 Measuring representational alignment (Figure 1b)

Kriegeskorte et al. [2008b] used RSA to measure alignment between neural responses in monkey and human inferotemporal cortex. The monkey neural responses were measured with multi-array electrophysiology and the human neural responses were measured with fMRI. The objective was to compare the representational geometry across monkeys and humans to determine if IT cortex is homologous across primate species using a descriptive and symmetric alignment function.

- **Dataset \mathcal{D} :** Let $\mathcal{D} := \{s_i\}_{i=1}^n$ be a set of images depicting objects on plain white backgrounds.
- **System A:** Let $f_\theta : \mathbb{R}^{H \times W \times C} \mapsto \mathbb{R}^p$ be a Rhesus macaque monkey whose neural activity we want to record for each image in the data using electrophysiology measures.
 - **Its measurements X :** Let $X := \mu_\alpha(f_\theta(s_1), \dots, f_\theta(s_n)) \in \mathbb{R}^{n \times p}$ be the monkey’s electrophysiology signals from inferior temporal cortex for each image in the data \mathcal{D} . For each image, the electrophysiology measurements are represented by a vector of p electrodes that reflect neural activity.
 - **Its embedding V :** Upper-triangular off-diagonal elements of the representational dissimilarity matrix $S_X \in \mathbb{R}^{n \times n}$ where each entry $s_{ij}^X := 1 - \left((\mathbf{x}_i - \bar{\mathbf{x}}_i)^\top (\mathbf{x}_j - \bar{\mathbf{x}}_j) / (\|\mathbf{x}_i - \bar{\mathbf{x}}_i\|_2 \|\mathbf{x}_j - \bar{\mathbf{x}}_j\|_2) \right)$ is determined by 1 minus the Pearson correlation coefficient between image representations $\mathbf{x}_i, \mathbf{x}_j$. Thus, we have that the embedding $\mathbf{v} \in \mathbb{R}^{n(n/2-n)}$ is a (flattened) vector representation rather than a matrix.
- **System B:** Let $g_\phi : \mathbb{R}^{H \times W \times C} \mapsto \mathbb{R}^{v \times d}$ be a human participant who transforms images into neural activity.
 - **Its measurements Y :** Let $Y := \nu_\beta(g_\phi(s_1), \dots, g_\phi(s_n)) \in \mathbb{R}^{n \times v \times d}$ be the human participant’s fMRI responses from inferior temporal cortex for each image in the data \mathcal{D} . For each image, the fMRI responses are represented by a matrix of voxel \times individual neuron activities with v voxels and d neurons.
 - **Its embedding W :** Upper-triangular off-diagonal elements of the representational dissimilarity matrix $S_Y \in \mathbb{R}^{n \times n}$ where each entry $s_{ij}^Y := 1 - \left((\mathbf{y}_i - \bar{\mathbf{y}}_i)^\top (\mathbf{y}_j - \bar{\mathbf{y}}_j) / (\|\mathbf{y}_i - \bar{\mathbf{y}}_i\|_2 \|\mathbf{y}_j - \bar{\mathbf{y}}_j\|_2) \right)$ is determined by 1 minus the Pearson correlation coefficient between image representations $\mathbf{y}_i, \mathbf{y}_j$. Thus, we have that the embedding $\mathbf{w} \in \mathbb{R}^{n(n/2-n)}$ is a (flattened) vector representation of the same shape as \mathbf{v} .
- **Descriptive and symmetric alignment function $\delta(\mathbf{v}, \mathbf{w})$:** Spearman’s rank correlation coefficient between the embedding vectors \mathbf{v} and \mathbf{w} .

4.2.2 Bridging representational spaces (Figure 1e)

O’Connell and Chun [2018] introduced techniques to (a) align fMRI responses across different individuals and (b) align fMRI responses to eye movement behavior within individuals. Humans viewed images depicting natural scenes while undergoing fMRI scanning, then in a separate session viewed the images while their eye movements were recorded. To align brain activity across individuals, a linear decoding analysis was used to map each individual’s fMRI responses into a common space defined as the unit activity of a CNN, which allowed for group-level analysis over the mean of the aligned responses. To align human brain activity to eye movements, a computational salience model is applied to the CNN-aligned fMRI responses to derive a brain-based spatial priority map which was then compared to human eye movement patterns. The objective was to identify brain regions in humans that capture spatial information predictive of human eye movement patterns.

(a) *aligning fMRI responses across individuals into a common (CNN-determined) representation space:*

- **Data \mathcal{D} :** Let $\mathcal{D} := \{s_i\}_{i=1}^n$ be a set of n images, each depicting a natural scene.
- **System A:** Let $f_\theta : \mathbb{R}^{H \times W \times C} \mapsto \mathbb{R}^{v \times p}$ be a human participant who transforms images into neural activity.
 - **Its measurements X :** Let $X := \mu_\alpha(f_\theta(s_1), \dots, f_\theta(s_n)) \in \mathbb{R}^{n \times v \times p}$ be the individual’s fMRI responses for each image in the data \mathcal{D} . For each image, the fMRI responses are represented by a matrix of voxel \times individual neuron activities with v voxels and p neurons.

- **Its embedding V :** Let $\varphi_\psi(\mathbf{x}_i) : \mathbb{R}^{v \times p} \mapsto \mathbb{R}^d$ denote partial least-squares (PLS) regression that learns a linear transformation from the participant’s measurements space X to the representation space of a CNN. The transformation was applied to held-out data to map the individual fMRI responses to the embedding space such that $\mathbf{V} := (\varphi_\psi(\mathbf{x}_1), \dots, \varphi_\psi(\mathbf{x}_n)) \in \mathbb{R}^{n \times d}$. Note that a flattening operation was applied to the rows of \mathbf{X} before employing PLS regression.
 - **System B:** Let $g_\phi : \mathbb{R}^{H \times W \times C} \mapsto \mathbb{R}^{v \times p}$ be a different human participant who transforms images into neural activity.
 - **Its measurements Y :** Let $\mathbf{Y} := \nu_\beta(g_\phi(s_1), \dots, g_\phi(s_n)) \in \mathbb{R}^{n \times v \times p}$ be the individual’s fMRI responses for each natural scenes image in the data \mathcal{D} .
 - **Its embedding W :** The same PLS regression mapping as above was used to map from the participant’s measurements space \mathbf{Y} to the representation space of a CNN. Similarly, the transformation was applied to held-out data to map the individual fMRI responses to the embedding space such that $\mathbf{W} := (\chi_\omega(\mathbf{y}_1), \dots, \chi_\omega(\mathbf{y}_n)) \in \mathbb{R}^{n \times d}$.
 - **Symmetric alignment function $\delta(V, W)$:** $\delta(\mathbf{v}_i, \mathbf{w}_i) := \frac{(\mathbf{v}_i - \bar{\mathbf{v}}_i)^\top (\mathbf{w}_i - \bar{\mathbf{w}}_i)}{\|\mathbf{v}_i - \bar{\mathbf{v}}_i\|_2 \|\mathbf{w}_i - \bar{\mathbf{w}}_i\|_2}$, where $\delta(\mathbf{v}_i, \mathbf{w}_i)$ denotes the Pearson correlation (coefficient) between the representations of function f_θ and function g_ϕ respectively for the same image in the shared (CNN-determined) embedding space.
- (b) *aligning fMRI responses to eye movement behavior:*
- **Data \mathcal{D} :** Let $\mathcal{D} := \{s_i\}_{i=1}^n$ be the same set of images as in (a).
 - **System A:** Let $f_\theta : \mathbb{R}^{H \times W \times C} \mapsto \mathbb{R}^{v \times p}$ be a human participant whose neural activity is recorded for each image in the data.
 - **Its measurements X :** Let $\mathbf{X} := \mu_\alpha(\varphi_\psi(f_\theta(s_1)), \dots, \varphi_\psi(f_\theta(s_n))) \in \mathbb{R}^{n \times d}$ be the group-level human fMRI responses transformed into a shared (CNN-determined) representation space (see embedding space above).
 - **Its embedding V :** The group-level CNN-transformed fMRI responses were averaged across the CNN activity feature dimension and layers to derive a brain-based spatial priority map predicting where people would look in an image. So, $\mathbf{V} \in \mathbb{R}^{n \times m}$
 - **System B:** Let $g_\phi : \mathbb{R}^{H \times W \times C} \mapsto \mathbb{R}^{t \times z}$ be the same human participant whose continuous eye movement patterns (instead of neural activity) is recorded for each image in the data.
 - **Its measurements Y :** Let $\mathbf{Y} := \nu_\beta(g_\phi(s_1), \dots, g_\phi(s_n)) \in \mathbb{R}^{n \times t \times p}$ be the individual participant’s (continuous) eye movement recordings (derived from an eye-tracking camera) for each image in the data \mathcal{D} .
 - **Its embedding W :** Let $W = \{x_i, y_i\}_{i=1}^n$ be the set of $(x, y) \in \mathbb{R}_+^2$ coordinates defining the location of all fixations for a given image in \mathcal{D} where n is the number of fixations.
 - **Descriptive and directional alignment function $\delta(V, W)$:** The Normalized Scanpath Saliency (NSS) is the mean of the spatial priority map activations corresponding to fixation locations such that $\text{NSS}(\mathbf{v}, \mathbf{w}) = \frac{1}{n} \sum_{(a,b) \in W} V_{ab}$.

4.2.3 Increasing representational alignment (Figure 1h)

Khosla and Wehbe [2022] trained CNNs to predict human fMRI responses in visual brain regions. While previous work had compared alignment in fMRI and image-optimized CNN representations using descriptive measures, this work aimed to increase human fMRI and CNN alignment by directly optimizing CNNs to be aligned with fMRI responses. They find that CNNs optimized to predict responses in high-level visual brain regions recapitulate visual behaviors including classification and making aligned similarity judgments to humans.

- **Data \mathcal{D} :** Let $\mathcal{D} := \{s_i\}_{i=1}^n$ be a set of n images, each depicting a natural scene.
- **System A:** Let $f_\theta : \mathbb{R}^{H \times W \times C} \mapsto \mathbb{R}^{v \times p}$ be a human participant whose neural activity we want to measure for a set of images.
 - **Its measurements X :** Let $\mathbf{X} := (f_\theta(s_1), \dots, f_\theta(s_n)) \in \mathbb{R}^{n \times v \times p}$ be the individual’s fMRI responses for each image in the data \mathcal{D} . For each image, the fMRI responses are represented by a matrix of voxel \times individual neuron activities with v voxels and p neurons.
 - **Its embedding V :** Let $\varphi_\psi(\mathbf{X}_i) : \mathbb{R}^{v \times p} \mapsto \mathbb{R}^v$ be an aggregation function that maps a matrix of voxel by neuron activities to a single activity per voxel. Thus, $\mathbf{V} \in \mathbb{R}^{n \times v}$.
- **System B:** Let $g_\phi : \mathbb{R}^{H \times W \times C} \mapsto \mathbb{R}^p$ be a deterministic neural network function that maps an image to a p -dimensional vector representation (in its penultimate layer space).

- **Its measurements Y :** Applying g_ϕ to each image in the data \mathcal{D} yields $\mathbf{Y} := (g_\phi(s_1), \dots, g_\phi(s_n)) \in \mathbb{R}^{n \times p}$, a stacked matrix of n (penultimate layer) image representations.
- **Its embedding W :** Let $\chi_\omega(\mathbf{y}_i) : \mathbb{R}^p \mapsto \mathbb{R}^v$ be a factorized linear readout (with learnable variables) that transforms penultimate layer image representations into human brain activity. Therefore, $\mathbf{W} := (\chi_\omega(\mathbf{y}_1), \dots, \chi_\omega(\mathbf{y}_n)) \in \mathbb{R}^{n \times v}$.
- **Differentiable and symmetric alignment function $\delta(V, W)$:** $\text{MSE}(\mathbf{v}_i, \mathbf{w}_i) = \frac{1}{v} \sum_{j=1}^v (\mathbf{v}_{ij} - \mathbf{w}_{ij})^2$.

4.3 Artificial Intelligence and Machine Learning

4.3.1 Measuring representational alignment (Figure 1c)

Just as it is possible to measure the similarity between representations of biological neurons, it is also possible to measure the similarity between representations of artificial neural networks. A variety of neural network representational similarity measures have been proposed [Raghu et al., 2017; Morcos et al., 2018; Williams et al., 2021; Ding et al., 2021]. Centered Kernel Alignment (CKA) is a particularly simple and widely-used approach for this purpose [Kornblith et al., 2019]:

- **Data \mathcal{D} :** Let $\mathcal{D} := \{s_i\}_{i=1}^n$ be a dataset of n images or text sequences.
- **System A:** Any neural network function. Let $f_\theta : \mathbb{R}^{H \times W \times C} \cup \mathbb{R}^{T \times K} \mapsto \mathbb{R}^p$ be a deterministic neural network function that maps a set of inputs (images or text sequences) to a set of outputs.
 - **Its measurements X :** Let $\mathbf{X} \in \mathbb{R}^{n \times p}$ be the matrix of activations extracted from a layer/module of the neural network function f_θ where $\mathbf{X} := \mu_\alpha(f_\theta(s_1), \dots, f_\theta(s_n))$.
 - **Its embedding V :** Here, φ_ψ is the identity function (in the case of linear CKA) or an arbitrary feature mapping applied to the set of measurements \mathbf{X} where $\mathbf{V} := (\varphi_\psi(\mathbf{x}_1), \dots, \varphi_\psi(\mathbf{x}_n)) \in \mathbb{R}^{n \times m}$.
- **System B:** Any neural network function. Let $g_\phi : \mathbb{R}^{H \times W \times C} \cup \mathbb{R}^{T \times K} \mapsto \mathbb{R}^d$ be another deterministic neural network function that maps a set of inputs (images or text sequences) to a set of outputs.
 - **Its measurements Y :** Let $\mathbf{Y} \in \mathbb{R}^{n \times d}$ be the matrix of activations extracted from a layer/module of the neural network function g_ϕ where $\mathbf{Y} := \nu_\beta(g_\phi(s_1), \dots, g_\phi(s_n))$.
 - **Its embedding W :** Here, φ is the identity function (in the case of linear CKA) or an arbitrary feature mapping applied to the set of measurements \mathbf{Y} where $\mathbf{W} := (\chi_\omega(\mathbf{y}_1), \dots, \chi_\omega(\mathbf{y}_n)) \in \mathbb{R}^{n \times z}$.
- **Differentiable and symmetric alignment function $\delta(V, W)$:**

$$\text{CKA} = \frac{\|\mathbf{V}^\top \mathbf{H} \mathbf{W}\|_{\mathbb{F}}^2}{\|\mathbf{V}^\top \mathbf{H} \mathbf{V}\|_{\mathbb{F}} \|\mathbf{W}^\top \mathbf{H} \mathbf{W}\|_{\mathbb{F}}} = \frac{\text{tr}(\mathbf{V} \mathbf{V}^\top \mathbf{H} \mathbf{W} \mathbf{W}^\top \mathbf{H})}{\|\mathbf{H} \mathbf{V} \mathbf{V}^\top \mathbf{H}\|_{\mathbb{F}} \|\mathbf{H} \mathbf{W} \mathbf{W}^\top \mathbf{H}\|_{\mathbb{F}}},$$

where $\mathbf{H}_n = \mathbf{I}_n - \frac{1}{n} \mathbf{1} \mathbf{1}^\top$ is the centering matrix.

Depending on the choice of the feature mapping, \mathbf{V} and \mathbf{W} can be expensive or impossible to compute directly. For example, the feature mapping associated with the radial basis function kernel is infinite-dimensional. In these cases one has to compute similarity matrices $\mathbf{K} = \mathbf{V} \mathbf{V}^\top$ and $\mathbf{L} = \mathbf{W} \mathbf{W}^\top$ by evaluating kernel functions $K_{ij} = k(\mathbf{x}_i, \mathbf{x}_j)$ and $L_{ij} = l(\mathbf{x}_i, \mathbf{x}_j)$.

4.3.2 Bridging representational spaces (Figure 1f)

By enforcing text and image representational alignment, multimodal models achieve better cross-task transfer compared to standard multitask learning. Specifically, Gupta et al. [2017] demonstrate better inductive transfer from visual recognition to visual question answering (VQA) than standard methods, stating that visual recognition additionally improves, in particular for categories that have relatively few recognition training labels but frequently appear in the query setting. Their setup is the following:

- **Data \mathcal{D} :** Let $\mathcal{D} := \{r_i, w_i\}_{i=1}^n$ be a dataset of n images with corresponding text descriptions.
- **System A:** Any neural network function. Let $f_\theta : \mathbb{R}^{H \times W \times C} \mapsto \mathbb{R}^p$ be a deterministic neural network function that maps a set of images to a set of vectorized outputs.
 - **Its measurements X :** Let $\mathbf{X} := \mu_\alpha(f_\theta(r_1), \dots, f_\theta(r_n)) \in \mathbb{R}^{n \times p}$ be the average pooled features from an ImageNet-trained ResNet-50 — which represents the neural network function f_θ — for all n images in the dataset \mathcal{D} .

- **Its embedding V :** Let $V := (\varphi_\psi(\mathbf{x}_1), \dots, \varphi_\psi(\mathbf{x}_n)) \in \mathbb{R}^{n \times m}$ the embedding matrix where $\varphi = \mathbb{1}$ and $m = p$.
- **System B:** Any neural network function. Let $g_\phi : \mathbb{R}^{T \times K} \mapsto \mathbb{R}^{t \times d}$ be another deterministic neural network function that maps a set of text sequences to a set of vectorized outputs.
 - **Its measurements Y :** By applying two fully connected layers (that have 300 output units each) from the neural network function g_ϕ to pretrained word2vec representations [Mikolov et al., 2013b] of the text descriptions w we obtain $\mathbf{Y} := \nu_\beta(g_\phi(\mathbf{w}'_1), \dots, g_\phi(\mathbf{w}'_n)) \in \mathbb{R}^{n \times t \times d}$, a stacked tensor of d -dimensional representations for each word in the text description.
 - **Its embedding W :** Let $\mathbf{W} := (\chi_\omega(\mathbf{y}_1), \dots, \chi_\omega(\mathbf{y}_n)) \in \mathbb{R}^{n \times t \times z}$ be the embedding tensor where $\varphi = \mathbb{1}$ and $z = d$.
- **Differentiable and directional alignment function $\delta(V, W)$:** Depending on whether a word in the text description is an object or an attribute, Gupta et al. [2017] use a different loss function for aligning image and text representations. Therefore, the authors partition the text descriptions into object and attribute sets. If a word in the text description w_i corresponding to an image r_i is an object, then the alignment between the image and text representations is increased by minimizing the following objective,

$$\delta(V, W) := \mathcal{L}_{\text{obj}}(f_\theta, g_\phi) := \frac{1}{|w_i^{\text{obj}}|} \sum_{l \in w_i^{\text{obj}}} \frac{1}{|\mathcal{O}|} \sum_{k \in \{\mathcal{O} \setminus w_i^{\text{obj}}\}} \max\{0, \eta_{\text{obj}} + \mathbf{x}_i^\top g_\phi(\mathcal{O})_k - \mathbf{x}_i^\top Y_{il}^{\text{obj}}\},$$

where \mathcal{O}^{10} is the set of the 1000 most frequent object categories in the Visual Genome dataset [Krishna et al., 2017] and $\eta_{\text{obj}} \in \mathbb{R}$ is a margin. If the word, however, is an attribute, then the following loss function is minimized instead,

$$\mathcal{L}_{\text{attr}}(f_\theta, g_\phi) := \sum_{t \in \mathcal{T}} \mathbb{1}[t \in \mathcal{T}] (1 - \Gamma(t)) \log[\sigma(\mathbf{x}_i^\top g_\phi(\mathcal{T})_t)] + \mathbb{1}[t \notin \mathcal{T}] \Gamma(t) \log[1 - \sigma(\mathbf{x}_i^\top g_\phi(\mathcal{T})_t)],$$

where $\sigma : \mathbb{R} \mapsto [0, 1]$ is a sigmoid activation function, $\Gamma(t)$ is the fraction of positive samples for attribute t in a mini-batch, and \mathcal{T}^{11} denotes the set of the 1000 most frequent attribute categories in the Visual Genome dataset [Krishna et al., 2017].

4.3.3 Increasing representational alignment (Figure 1i)

The distillation of knowledge from a teacher network into a student network is a powerful tool in machine learning. It is used to a) compress a large teacher network into a smaller (and faster) student model, b) transfer knowledge from one modality to another (e.g. RGB to depth images), and c) combine the knowledge from an ensemble of teachers into a single student network. While initial work in this area Hinton et al. [2015] focused on behavioral alignment, Tian et al. [2019] proposed a general framework for transferring knowledge by aligning (intermediate) representations. Their setup for transfer between modalities (b) is as follows:

- **Data \mathcal{D} :** Let $\mathcal{D} := \{(s_i, r_i)\}_{i=1}^n$ be a dataset of n pairs of different modalities (e.g., RGB and depth images).
- **System A:** Let $f_\theta : \mathbb{R}^{H \times W \times C_1} \mapsto \mathbb{R}^p$ be any (pretrained) neural network function that maps a set of inputs (e.g., RGB images) to a set of outputs and takes the role of the teacher network.
 - **Its measurements X :** Let $\mathbf{X} \in \mathbb{R}^{n \times p}$ be the matrix of activations extracted from a layer/module of the neural network function f_θ for all n RGB images where $\mathbf{X} := \mu_\alpha(f_\theta(s_1), \dots, f_\theta(s_n))$.
 - **Its embedding V :** Here φ_ψ is the identity function, so $\mathbf{V} = \mathbf{X}$.
- **System B:** Any trainable neural network function that takes the role of the student network. Let $g_\phi : \mathbb{R}^{H \times W \times C_2} \mapsto \mathbb{R}^d$ be another deterministic neural network function that maps a different set of inputs (e.g., depth images) to a set of outputs.
 - **Its measurements Y :** Let $\mathbf{Y} \in \mathbb{R}^{n \times q}$ be the matrix of activations extracted from a layer/module of the neural network function g_ϕ for all n depth images where $\mathbf{Y} := \nu_\beta(g_\phi(r_1), \dots, g_\phi(r_n))$.
 - **Its embedding W :** Here χ_ω is the identity function, so $\mathbf{W} = \mathbf{Y}$.

¹⁰Since we deal with non-contextual word representations, here, we can simply treat \mathcal{O} as a sequence of words rather than a set and apply the neural network function g_ϕ (sequentially) to it.

¹¹Again, here we can treat \mathcal{T} as a sequence of words rather than a set and apply g_ϕ to the sequence to obtain a representation for each attribute word.

- **Differentiable and directional alignment function** $\delta(V, W)$:

$$\begin{aligned}\delta(V, W) &= \max_h \mathcal{L}_{\text{critic}}(g_\phi, h) \\ &= \mathbb{E}_{P(X, Y)} [\log h(\mathbf{x}, \mathbf{y})] + N \mathbb{E}_{P(X)P(Y)} [\log(1 - h(\mathbf{x}, \mathbf{y}))].\end{aligned}$$

Here $h : \mathbb{R}^p \times \mathbb{R}^q \mapsto [0, 1]$ is a differentiable function that is trained alongside the student. Thus in this case, the alignment function $\delta(V, W)$ is not fixed but instead fitted to the teacher and student networks f_θ and g_ϕ . Note that the two expectations are taken over sampling matching pairs of inputs (i.e. (s_i, r_i)) and over non-matching pairs of inputs (i.e. (s_i, r_j) with $i \neq j$) respectively. The factor N is a hyperparameter that determines the relative frequency of non-matching pairs with respect to matching pairs. Tian et al. [2019] show that in this setup $\mathcal{L}_{\text{critic}}$ is a lower bound on the mutual information $I(\mathbf{V}; \mathbf{W})$.

5 Open problems & challenges in representational alignment

In the previous sections, we have presented a unifying framework for analyzing representational alignment that encompasses a wide range of research disciplines. We highlighted commonalities in the work being pursued by researchers across these fields: despite their seemingly disparate natures, each field is conducting profound inquiries into representational alignment and researchers from each field bring complementary perspectives to the table.

We next look ahead and outline a series of challenging unsolved questions that transcend these disciplines. We hope that by identifying these shared challenges, we promote a holistic approach to problem-solving that can catalyze inter-disciplinary collaboration and lead to further progress: not just in each individual field, but across them (and perhaps even sparking new sub-disciplines). We encourage an exchange of ideas and perspectives among our diverse scientific communities, whose combined efforts are well-positioned to help unravel the complexities of representational alignment and advance the design of more representation-aligned information processing systems.

5.1 Selecting data and stimuli

Any attempt to either measure or increase representational alignment begins with selecting the dataset \mathcal{D} over which to compute alignment. The degree of alignment measured, or the results of increasing alignment, can depend dramatically on the dataset used.

In particular, if the dataset over which representation alignment is computed is too restricted, the results may not generalize. For example, various features may be confounded in naturalistic data, which can lead to overestimating alignment between models that rely on different features [e.g. Malcolm et al., 2016; Groen et al., 2018; Dujmović et al., 2022]. For example, the strong correlation between shape and texture in natural photos may mask the extent to which humans and CNNs rely on distinct features for object recognition (Landau et al., 1988; Baker et al., 2018; Geirhos et al., 2019; Hermann et al., 2020; though cf. Jagadeesh and Gardner, 2022). Likewise, selecting natural stimuli to test an effect of a single feature can introduce biases in other correlated features [Rust and Movshon, 2005]—for example, confounds between lower-level statistical features like Fourier power and more conceptual features like subjective distance or object category can make it harder to identify which is driving neural activity from natural images [Lescroart et al., 2015].

On the other hand, it may be invalid to draw certain inferences based on representations of overly simplistic, even if carefully controlled, stimuli. For example, processing naturalistic stimuli, such as reading a long, continuous text, may engage fundamentally different processes than more controlled tasks over shorter stimuli [Hasson et al., 2015]. As a more concrete example, retinal neurons were originally studied with simple bar and grating stimuli; however, some retinal neurons are sensitive to more complex interactions of features, such as foreground motion against a moving background [Ölveczky et al., 2003]. Thus, there are dramatic representational differences on datasets of naturalistic stimuli [Karamanlis et al., 2022]. Research in machine learning has similarly shown that studying model representations in the context of one dataset may suggest that neurons encode a particular type of feature that is quite different than what appears to be encoded when studying representations in the context of a different dataset. For example, neurons in the language model BERT [Devlin et al., 2018] appear to encode song titles given one dataset, but dates of historical events given another [Bolukbasi et al., 2021]. Thus, the interpretations we draw from our analyses may be biased by the limitations of the data we consider. This issue is not restricted to sparse coding: similar issues can arise under distribution shifts when using RSA or other distributed representation analyses [Dujmović et al., 2022; Friedman et al., 2024]. Thus, it is important to assess representational similarity on as diverse a dataset as possible — ideally one that includes both naturalistic stimuli, and more controlled ones that explicitly reduce confounding among important features [Rust and Movshon, 2005; Bowers et al., 2022; Hermann et al., 2023] — and to test on held-out categories of stimuli, in order to determine the generality of the analysis.

However, as noted above (§2.2.5), representational alignment and dataset selection can be mutually reinforcing. Representational alignment can be used to identify key cases where models disagree, by synthesizing optimally

“controversial stimuli” that maximally distinguish between the representation spaces [Golan et al., 2022; Groen et al., 2018], or even by selecting the most controversial among large sets of natural stimuli [Hosseini et al., 2023], which can then be tested on humans or animals. Likewise, representational alignment can be used to optimize stimuli that drive a particular response [Tuckute et al., 2023]. The mechanisms of alignment can then be diagnosed through controlled experiments that manipulate stimulus factors [e.g. Opielka et al., 2024]. Thus, there can be a virtuous cycle in which measuring representational alignment allows for better selection of datasets that support precisely measuring and understanding representational alignment, and so on. These investigations demand a multidisciplinary perspective drawing on data collection and experimentation practices across research communities.

5.2 Defining, probing, and characterizing representations

Once we have chosen systems to compare, and stimuli over which to compare them, we must decide how to present the stimuli to them and how to extract representations. For example, human image processing is recurrent and in some cases this computation can produce more accurate representations over time; thus in some cases non-recurrent network behavior may appear similar to humans under time pressure, but not humans given long times to process a stimulus [e.g. Elsayed et al., 2018]—and presumably some of the underlying representations would reflect this evolution. Thus, details like time of stimulus presentation may in some cases substantially affect the measured representational patterns and similarity between two systems. Likewise, neural representations are dynamic and context-sensitive, and thus presentation order can affect the representation of stimuli. Thus, the presentations format should ideally be designed to align between the two systems as closely as possible, and randomize factors that cannot be aligned.

Extracting representations also poses challenges. For example, in a deep transformer language model, which layers or components (e.g. attention heads or MLPs) should we analyze? If we are interested in human brain activity, how should we record it? Indirect measures like fMRI or EEG can distort or enhance features compared to the information that is computationally available to the underlying system [Ritchie et al., 2019]. Or, if we record single-cell neural activity from cortical cells, which regions should we target? These decisions can radically change the results of the analysis. For example, certain kinds of knowledge may be localized in particular regions or components in natural [Kanwisher et al., 1997] and artificial [Manning et al., 2020; Meng et al., 2022] neural networks. Which regions should we study?

Ideally, we would compute representations over all regions and components of each system, and compare these pairwise. Pairwise comparison can reveal similarities in processing, such as parallels in progression through regions of the visual cortex and artificial CNNs [Yamins and DiCarlo, 2016]. However, it is often experimentally or computationally infeasible to do these analyses in full. Often, it is necessary to rely on the prior literature—and the available tools—to constrain the hypothesis space of representations to consider. Conversations amongst researchers spanning varied disciplines can ensure such choices are well-informed. However, even once we have selected a method of extracting representations, understanding the role that these representations play in computation remains conceptually challenging, as we discuss in section 5.2.2.

5.2.1 Eliciting representations from black-box systems

How do we measure the representational alignment of black-box systems whose inner workings we cannot access? One technique that we described above is collecting similarity judgments, but there are often cases where running similarity experiments is not feasible, e.g., when we work with a high dimensional and large dataset (however, see Marjeh et al. [2023a] for some recent progress in this direction). An alternative is based on Markov Chain Monte Carlo (MCMC) sampling processes that are widely used in machine learning and physics [Metropolis et al., 1953; Hastings, 1970]. The method was first introduced by Sanborn and Griffiths [2007] where participants gradually refined high-dimensional objects by acting as the rejection function in an MCMC sampling chain. Under specific conditions that can be empirically validated, this method converges to a sample from the hidden distribution or representational prior of the participants [Sanborn et al., 2010].

Another similarly adaptive technique is serial reproduction [Xu and Griffiths, 2010; Langlois et al., 2017]. This method employs a Gibbs sampling algorithm where participants are tasked with directly recalling and replicating intricate objects, effectively sampling from the underlying prior. Examples include the reproduction of rhythmic sequences [Jacoby and McDermott, 2017; Jacoby et al., 2021a], melodies [Anglada-Tort et al., 2023], or specific spatial positions shown to the participants [Langlois et al., 2021b]. This methodology is especially potent in areas where the black-box system, in this instance, a human, can reproduce intricate objects without intermediaries. A recent advancement by Harrison et al. [2020] suggests a technique for modifying object dimensions by interacting with it using a computer slider. Using the Gibbs sampler, this approach has been instrumental in deriving foundational semantic “prototypes” for facial structures [Harrison et al., 2020], emotional prosody [Van Rijn et al., 2021; van Rijn et al., 2022], visual patterns [Kumar et al., 2022], and musical chords [Marjeh et al., 2024a].

It is worth noting that while these methods predominantly involve human subjects, there is a significant overlap with machine learning generative paradigms. Indeed, Marjeh et al. [2023b] have recently demonstrated the mathematical parallels between serial reproduction and diffusion processes. This connection hints at the promising potential of representation elicitation methods in enhancing the interpretability of machine learning, as well as fostering generative models that better resonate with human preferences in forthcoming research.

5.2.2 The relationship between representation and computation

In general, we are interested in understanding (or modifying) the representational structure of a system in order to understand (or modify) more abstract computations. However, this raises a thorn for representational alignment research: our methods and interpretation of results depend upon the complex relationship between representation and computation [cf. Churchland and Sejnowski, 1988]. Here, we highlight some challenges and questions about this relationship.

Extraneous influences on representations: Representations may be shaped by other implementation-level factors that are not essential to the computational process. For example, biological representations may be constrained by energetic demands [e.g., Laughlin, 2001], while deep learning representations may be biased by which features are already represented before training, or which are learned more readily [Hermann and Lampinen, 2020; Farrell et al., 2023; Lampinen et al., 2024]. These extraneous factors may cause us to either under- or overestimate representational similarity between systems with different learning processes and implementations [Dujmović et al., 2022; Griffiths et al., 2023; Friedman et al., 2023].

Context-dependent & dynamic representation: Biological neural representations are dynamic and contextual; they change with repetition [Grill-Spector et al., 2006], attention [Cukur et al., 2013; Birman and Gardner, 2019], context [Brette, 2019; Deniz et al., 2023], and time [Rule et al., 2019]. When performing representational similarity analysis, we are forced to treat a single representation (or a within-participant average) as though it were a canonical representation of that stimulus. However, this inevitably elides important details of the dynamic role each representation plays in the system’s computation.

Philosophical issues in representation and computation: The practical issues above hint at deeper philosophical issues. Representational alignment is grounded in a computational perspective on natural intelligence, particularly, the notion that a system must necessarily form representations of its inputs in order to produce intelligent behavior. This perspective underlies, for example, the idea that there exists an embedding “function” that can be mapped across a set of stimuli to produce a tensor of embeddings.

However, other perspectives de-emphasize representation and computation in favor of the dynamic interaction between an intelligent system and its environment [e.g., Brooks, 1991; Cisek, 1999]. From such perspectives, measuring alignment between tensors of “representations” may seem misguided. Indeed, as noted above, the brain is a dynamical system whose responses to stimuli change and adapt. Thus, how can we philosophically justify aligning “representations” between artificial and natural intelligence?

While we acknowledge the challenges posed by these issues, we take a more *pragmatic* perspective on representation [cf., Poldrack, 2021; Cao, 2022] and interpret a system’s internal responses as representations insofar as they play a “representation-like” role in its behavior. The empirical evidence that aligning representations of neural networks to human ones can improve generalization and transferability [e.g., Muttenthaler et al., 2023b] helps to justify this approach. However, we believe that more deeply analyzing the dynamic role of the system’s internal responses in its behavioral interactions could yield greater insights, or greater ability to align systems. Indeed, some recent works are moving in this direction; for example, Ostrow et al. [2024] propose a Dynamical Similarity Analysis method that focuses on temporal dynamics, and find that it more accurately identifies similarities among recurrent networks on various tasks.

5.3 Measuring alignment

There are also challenges in measuring alignment between systems. As noted above (§3.3.4), different measures of similarity have distinct advantages and disadvantages. For example, we may be interested in asymmetries that are obscured by symmetrical metrics, or we may want to evaluate how fitting parameters in the alignment changes conclusions. In many cases, different metrics can yield different conclusions about the relationship between two systems [e.g. Minnema and Herbelot, 2019; Cloos et al., 2024a]. Thus, as noted above, it is useful to compare systems using multiple metrics.

Yet, there are also shared challenges across similarity measures that are more difficult to address, again due to the complex relationship between representation and computation. For example, similarity metrics generally impose the assumption that smaller differences between two representations are less important than larger ones. For example, (unregularized) linear regression, or RDMs computed with Euclidean distance, assume that the squared distance between

two representations measures how important the distinctions between them are. However, this may not always be a good assumption. Sometimes even if a system represents two signals equally well, and uses them equally often, one will carry much less variance — i.e., changes in the signal will result in smaller changes in the representations as measured by Euclidean distance metrics — perhaps due to inductive biases or learning dynamics [Lampinen et al., 2024]. Unless we have some way of knowing how “important” different aspects of a representation are to each system’s computations, and accordingly adapting our similarity measures, our measures of representational alignment will fail to perfectly capture the underlying computational similarity.

5.4 Will representational alignment help improve the alignment of behavior?

Representational alignment focuses on *the representation space of a system*; i.e., the activations yielded by the information processing function of a system (see §3). However, as noted above, the relationship between representation and computation is complex. The outputs of systems can be aligned even if these systems have different representations, and vice versa [e.g. Hermann and Lampinen, 2020; Davari et al., 2023; Cloos et al., 2024a]; likewise, systems that have similar representations early in processing may diverge in later regions to produce different outputs [Singer et al., 2022]. Thus, representational alignment between systems is not a prerequisite for aligned outputs, nor will it guarantee them.

However, initial representations constrain what a system will learn to output, and conversely, what a system learns to output will shape its representations. Thus, although it may be possible to achieve output alignment without representational alignment, the tight coupling between representations and outputs motivates studying representational alignment as one potential tool for achieving output alignment. Representational alignment could help researchers to pinpoint potential causes for output (mis-)alignment of systems, and could be used as a complement to more direct strategies for improving output alignment [Peterson et al., 2018; Barrett et al., 2018; Toneva and Wehbe, 2019; Fel et al., 2022; Muttenthaler et al., 2023a,b; Fu et al., 2023], which may be especially important when designing human-centric AI thought partners [Collins et al., 2024b].

5.5 Possible risks of representational alignment

It is important to acknowledge that there may be risks to representational alignment. For instance, increased representational alignment could potentially make it more difficult for a person to detect that outputs are generated by a model rather than a person. In the case of aligning with a biological system, it is paramount to consider which systems (e.g., which humans) we do or do not wish to align towards, and what downstream biases could occur as a result of these potentially implicit design choices [cf. Gabriel, 2020]. We encourage further work to characterize possible risks and develop frameworks to guard against such possible negative ramifications.

6 Conclusion

Representational alignment is increasingly central to the various fields that study information processing, including cognitive science, neuroscience, and machine learning. In each field, researchers attempt to *measure* the alignment between representations from different systems, to *bridge* between distinct systems by bringing their representations into a shared space, and to *increase* the representational alignment of two systems. However, there is no clear common language for discussion between these different communities; thus, researchers are often unaware of related ideas, methods, and empirical results. In this Perspective, we have attempted to build bridges to help align terminology and methods across these fields, and to highlight some of the history and recent developments within each. We hope that our work will simultaneously increase the sharing of related ideas and methods across fields, and raise awareness of common challenges and open questions. More broadly, we hope that seeing the varied perspectives outlined here will inspire other researchers to apply the ideas and tools of representational alignment to understanding or building (more) intelligent systems.

Acknowledgments

LM and KRM acknowledge funding from the German Federal Ministry of Education and Research (BMBF) for the grants BIFOLD22B and BIFOLD23B. KRM was supported in part by the Institute of Information and Communications Technology Planning and Evaluation (IITP) grant funded by the Korea Government: No. 2019-0-00079, Artificial Intelligence Graduate School Program, Korea University; and No. 2022-0-00984, Development of Artificial Intelligence Technology for Personalized Plug-and-Play Explanation and Verification of Explanation. KMC acknowledges support from the Marshall Commission and Cambridge Trust. AW acknowledges support from a Turing AI Fellowship under grant EP/V025279/1, The Alan Turing Institute, and the Leverhulme Trust via CFI. This work was supported by an NSERC fellowship (567554-2022) to IS. JA acknowledges funding through a Medical Research Council intramural programme (MC_UU_00030/7), a Gates Cambridge Scholarship through the Bill and Melinda Gates Foundation, and additional support through Intel Labs. We thank Mike Mozer and Alex Williams for their excellent comments on an earlier version of this manuscript.

References

- [1] Amro Abbas and Stéphane Deny. Progress and limitations of deep networks to recognize objects in unusual poses. *arXiv preprint arXiv:2207.08034*, 2022.
- [2] Jannis Ahlert, Thomas Klein, Felix A Wichmann, and Robert Geirhos. How aligned are different alignment metrics? In *ICLR 2024 Workshop on Representational Alignment*, 2024.
- [3] Kaarina Aho, Brett D Roads, and Bradley C Love. System alignment supports cross-domain learning and zero-shot generalisation. *Cognition*, 227:105200, 2022.
- [4] Kaarina Aho, Brett D Roads, and Bradley C Love. Signatures of cross-modal alignment in children’s early concepts. *Proceedings of the National Academy of Sciences (in press)*, 1:1, 2023.
- [5] Emily J Allen, Ghislain St-Yves, Yihan Wu, Jesse L Breedlove, Jacob S Prince, Logan T Dowdle, Matthias Nau, Brad Caron, Franco Pestilli, Ian Charest, et al. A massive 7T fMRI dataset to bridge cognitive neuroscience and artificial intelligence. *Nature neuroscience*, 25(1):116–126, 2022.
- [6] Manuel Anglada-Tort, Peter MC Harrison, Harin Lee, and Nori Jacoby. Large-scale iterated singing experiments reveal oral transmission mechanisms underlying music evolution. *Current Biology*, 33(8):1472–1486, 2023.
- [7] Richard Antonello and Alexander Huth. Predictive coding or just feature discovery? an alternative account of why language models fit brain data. *Neurobiology of Language*, pages 1–16, 2022.
- [8] Ioanna Maria Attarian, Brett D Roads, and Michael Curtis Mozer. Transforming neural network visual representations to predict human judgments of similarity. In *NeurIPS 2020 Workshop SVRHM*, 2020.
- [9] Khai Loong Aw and Mariya Toneva. Training language models to summarize narratives improves brain alignment. In *Eleventh International Conference on Learning Representations*. OpenReview. net, 2023.
- [10] Khai Loong Aw, Syrielle Montariol, Badr AlKhamissi, Martin Schrimpf, and Antoine Bosselut. Instruction-tuning aligns llms to the human brain. *arXiv preprint arXiv:2312.00575*, 2023.
- [11] Sebastian Bach, Alexander Binder, Grégoire Montavon, Frederick Klauschen, Klaus-Robert Müller, and Wojciech Samek. On pixel-wise explanations for non-linear classifier decisions by layer-wise relevance propagation. *PLOS ONE*, 10(7):e0130140, 2015.
- [12] David Baehrens, Timon Schroeter, Stefan Harmeling, Motoaki Kawanabe, Katja Hansen, and Klaus-Robert Müller. How to explain individual classification decisions. *The Journal of Machine Learning Research*, 11: 1803–1831, 2010.
- [13] Yuntao Bai, Saurav Kadavath, Sandipan Kundu, Amanda Askell, Jackson Kernion, Andy Jones, Anna Chen, Anna Goldie, Azalia Mirhoseini, Cameron McKinnon, et al. Constitutional ai: Harmlessness from ai feedback. *arXiv preprint arXiv:2212.08073*, 2022.
- [14] Bowen Baker, Ilge Akkaya, Peter Zhokov, Joost Huizinga, Jie Tang, Adrien Ecoffet, Brandon Houghton, Raul Sampedro, and Jeff Clune. Video pretraining (vpt): Learning to act by watching unlabeled online videos. *Advances in Neural Information Processing Systems*, 35:24639–24654, 2022.
- [15] Nicholas Baker, Hongjing Lu, Gennady Erlikhman, and Philip J Kellman. Deep convolutional networks do not classify based on global object shape. *PLoS computational biology*, 14(12):e1006613, 2018.
- [16] Wanqian Bao and Uri Hasson. Identifying and interpreting non-aligned human conceptual representations using language modeling. *arXiv preprint arXiv:2403.06204*, 2024.
- [17] H Clark Barrett. Towards a cognitive science of the human: cross-cultural approaches and their urgency. *Trends in cognitive sciences*, 24(8):620–638, 2020.
- [18] Maria Barrett, Joachim Bingel, Nora Hollenstein, Marek Rei, and Anders Sjøgaard. Sequence classification with human attention. In *Proceedings of the 22nd Conference on Computational Natural Language Learning*, pages 302–312, Brussels, Belgium, October 2018. Association for Computational Linguistics.
- [19] David Bau, Bolei Zhou, Aditya Khosla, Aude Oliva, and Antonio Torralba. Network dissection: Quantifying interpretability of deep visual representations. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 6541–6549, 2017.
- [20] Yoshua Bengio, Aaron C. Courville, and Pascal Vincent. Unsupervised feature learning and deep learning: A review and new perspectives. *CoRR*, abs/1206.5538, 2012. URL <http://arxiv.org/abs/1206.5538>.
- [21] Brent Berlin and Paul Kay. *Basic color terms: Their universality and evolution*. University of California Press, 1991.
- [22] John W Berry. *Cross-cultural psychology: Research and applications*. Cambridge University Press, 2002.

- [23] Sudeep Bhatia. Inductive reasoning in minds and machines. *Psychological Review*, 2023.
- [24] Sudeep Bhatia and Russell Richie. Transformer networks of human conceptual knowledge. *Psychological review*, 2022.
- [25] Sudeep Bhatia, Russell Richie, and Wanling Zou. Distributed semantic representations for modeling human judgment. *Current Opinion in Behavioral Sciences*, 29:31–36, 2019.
- [26] Daniel Birman and Justin L Gardner. A flexible readout mechanism of human sensory representations. *Nature communications*, 10(1):3500, 2019.
- [27] A. Bobu, A. Bajcsy, J. F. Fisac, S. Deglurkar, and A. D. Dragan. Quantifying hypothesis space misspecification in learning from human–robot demonstrations and physical corrections. *IEEE Transactions on Robotics*, pages 1–20, 2020.
- [28] Andreea Bobu, Marius Wiggert, Claire Tomlin, and Anca D Dragan. Feature expansive reward learning: Rethinking human input. In *Proceedings of the 2021 ACM/IEEE International Conference on Human-Robot Interaction*, pages 216–224, 2021.
- [29] Andreea Bobu, Andi Peng, Pulkit Agrawal, Julie Shah, and Anca D Dragan. Aligning robot and human representations. *arXiv preprint arXiv:2302.01928*, 2023.
- [30] Gemma Boleda. Distributional semantics and linguistic theory. *Annual Review of Linguistics*, 6:213–234, 2020.
- [31] Tolga Bolukbasi, Adam Pearce, Ann Yuan, Andy Coenen, Emily Reif, Fernanda Viégas, and Martin Wattenberg. An interpretability illusion for bert. *arXiv preprint arXiv:2104.07143*, 2021.
- [32] Tyler Bonnen, Stephanie Fu, Yutong Bai, Thomas O’Connell, Yoni Friedman, Nancy Kanwisher, Joshua B. Tenenbaum, and Alexei A. Efros. Evaluating multiview object consistency in humans and image models, 2024. URL <https://arxiv.org/abs/2409.05862>.
- [33] Jeffrey S Bowers, Gaurav Malhotra, Marin Dujmović, Milton Llera Montero, Christian Tsvetkov, Valerio Biscione, Guillermo Puebla, Federico Adolphi, John E Hummel, Rachel F Heaton, et al. Deep problems with neural network models of human vision. *Behavioral and Brain Sciences*, pages 1–74, 2022.
- [34] Stefania Bracci, J Brendan Ritchie, Ioannis Kalfas, and Hans P Op de Beeck. The ventral visual pathway represents animal appearance over animacy, unlike human behavior and deep neural networks. *Journal of Neuroscience*, 39(33):6513–6525, 2019.
- [35] Stefania Bracci, Jakob Mraz, Astrid Zeman, Gaëlle Leys, and Hans Op de Beeck. The representational hierarchy in human and artificial visual systems in the presence of object-scene regularities. *PLoS computational biology*, 19(4):e1011086, 2023.
- [36] Mark J Brandt. Measuring the belief system of a person. *Journal of Personality and Social Psychology*, 2022.
- [37] Romain Brette. Is coding a relevant metaphor for the brain? *Behavioral and Brain Sciences*, 42:e215, 2019.
- [38] Rodney A Brooks. Intelligence without representation. *Artificial intelligence*, 47(1-3):139–159, 1991.
- [39] Davis Brown, Madelyn Ruth Shapiro, Alyson Bittner, Jackson Warley, and Henry Kvinge. Wild comparisons: A study of how representation similarity changes when input data is drawn from a shifted distribution. In *ICLR 2024 Workshop on Representational Alignment*, 2024.
- [40] Kalesha Bullard, Sonia Chernova, and Andrea L Thomaz. Human-driven feature selection for a robotic agent learning classification tasks from demonstration. In *2018 IEEE International Conference on Robotics and Automation (ICRA)*, pages 6923–6930. IEEE, 2018.
- [41] Collin Burns, Haotian Ye, Dan Klein, and Jacob Steinhardt. Discovering latent knowledge in language models without supervision. *arXiv preprint arXiv:2212.03827*, 2022.
- [42] Erica L Busch, Lukas Slipski, Ma Feilong, J Swaroop Guntupalli, Matteo Visconti di Oleggio Castello, Jeremy F Huckins, Samuel A Nastase, M Ida Gobbini, Tor D Wager, and James V Haxby. Hybrid hyperalignment: A single high-dimensional model of shared information embedded in cortical patterns of response and functional connectivity. *NeuroImage*, 233:117975, 2021.
- [43] Santiago A Cadena, George H Denfield, Edgar Y Walker, Leon A Gatys, Andreas S Tolias, Matthias Bethge, and Alexander S Ecker. Deep convolutional models improve predictions of macaque v1 responses to natural images. *PLoS computational biology*, 15(4):e1006897, 2019.
- [44] Charles F Cadieu, Ha Hong, Daniel LK Yamins, Nicolas Pinto, Diego Ardila, Ethan A Solomon, Najib J Majaj, and James J DiCarlo. Deep neural networks rival the representation of primate it cortex for core visual object recognition. *PLoS computational biology*, 10(12):e1003963, 2014.

- [45] Maya Cakmak and Andrea L Thomaz. Designing robot learners that ask good questions. In *Proceedings of the seventh annual ACM/IEEE international conference on Human-Robot Interaction*, pages 17–24, 2012.
- [46] Rosa Cao. Putting representations to use. *Synthese*, 200(2):151, 2022.
- [47] Susan Carey. Conceptual differences between children and adults. *Mind and Language*, 3(3):167–181, 1988.
- [48] Mathilde Caron, Hugo Touvron, Ishan Misra, Hervé Jégou, Julien Mairal, Piotr Bojanowski, and Armand Joulin. Emerging properties in self-supervised vision transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 9650–9660, October 2021.
- [49] Stephen Casper, Xander Davies, Claudia Shi, Thomas Krendl Gilbert, Jérémy Scheurer, Javier Rando, Rachel Freedman, Tomasz Korbak, David Lindner, Pedro Freire, et al. Open problems and fundamental limitations of reinforcement learning from human feedback. *arXiv*, 2023.
- [50] Charlotte Caucheteux and Jean-Rémi King. Brains and algorithms partially converge in natural language processing. *Communications biology*, 5(134), 2022.
- [51] Alan Chan, Rebecca Salganik, Alva Markelius, Chris Pang, Nitarshan Rajkumar, Dmitrii Krasheninnikov, Lauro Langosco, Zhonghao He, Yawen Duan, Micah Carroll, et al. Harms from increasingly agentic algorithmic systems. In *Proceedings of the 2023 ACM Conference on Fairness, Accountability, and Transparency*, pages 651–666, 2023.
- [52] Po-Hsuan (Cameron) Chen, Janice Chen, Yaara Yeshurun, Uri Hasson, James Haxby, and Peter J Ramadge. A reduced-dimension fmri shared response model. In C. Cortes, N. Lawrence, D. Lee, M. Sugiyama, and R. Garnett, editors, *Advances in Neural Information Processing Systems (NIPS)*, volume 28, 2015a.
- [53] Po-Hsuan Cameron Chen, Janice Chen, Yaara Yeshurun, Uri Hasson, James Haxby, and Peter J Ramadge. A reduced-dimension fmri shared response model. *Advances in Neural Information Processing Systems*, 28, 2015b.
- [54] Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A simple framework for contrastive learning of visual representations. In Hal Daumé III and Aarti Singh, editors, *Proceedings of the 37th International Conference on Machine Learning*, pages 1597–1607, 13–18 Jul 2020.
- [55] Jang Hyun Cho and Bharath Hariharan. On the efficacy of knowledge distillation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, October 2019.
- [56] Paul F Christiano, Jan Leike, Tom Brown, Miljan Martic, Shane Legg, and Dario Amodei. Deep reinforcement learning from human preferences. *Advances in Neural Information Processing Systems*, 30, 2017.
- [57] Patricia S Churchland and Terrence J Sejnowski. Perspectives on cognitive neuroscience. *Science*, 242(4879): 741–745, 1988.
- [58] Radoslaw M. Cichy, Nikolaus Kriegeskorte, Kamila M. Jozwik, Jasper J.F. van den Bosch, and Ian Charest. The spatiotemporal neural dynamics underlying perceived similarity for real-world objects. *NeuroImage*, 194:12–24, 2019. ISSN 1053-8119.
- [59] Radoslaw Martin Cichy, Dimitrios Pantazis, and Aude Oliva. Resolving human object recognition in space and time. *Nature Neuroscience*, 17(3):455–462, 2014.
- [60] Radoslaw Martin Cichy, Aditya Khosla, Dimitrios Pantazis, Antonio Torralba, and Aude Oliva. Comparison of deep neural networks to spatio-temporal cortical dynamics of human visual object recognition reveals hierarchical correspondence. *Scientific Reports*, 6(1):27755, 2016.
- [61] Paul Cisek. Beyond the computer metaphor: Behaviour as interaction. *Journal of Consciousness Studies*, 6 (11-12):125–142, 1999.
- [62] Nathan Cloos, Markus Siegel, Scott L Brincat, Earl K Miller, and Christopher J Cueva. Differentiable optimization of similarity scores between models and brains. In *ICLR 2024 Workshop on Representational Alignment*, 2024a.
- [63] Nathan Cloos, Guangyu Robert Yang, and Christopher J. Cueva. A framework for standardizing similarity measures in a rapidly evolving field, 2024b. URL <https://arxiv.org/abs/2409.18333>.
- [64] Katherine M. Collins, Umang Bhatt, and Adrian Weller. Eliciting and learning with soft labels from every annotator. *Proceedings of the AAAI Conference on Human Computation and Crowdsourcing*, 10(1):40–52, Oct. 2022. doi:10.1609/hcomp.v10i1.21986.
- [65] Katherine M Collins, Matthew Barker, Mateo Espinosa Zarlenga, Naveen Raman, Umang Bhatt, Mateja Jamnik, Ilia Sucholutsky, Adrian Weller, and Krishnamurthy Dvijotham. Human uncertainty in concept-based AI systems. *AIES*, 2023a.
- [66] Katherine M Collins, Umang Bhatt, Weiyang Liu, Vihari Piratla, Ilia Sucholutsky, Bradley Love, and Adrian Weller. Human-in-the-loop mixup. In *Uncertainty in Artificial Intelligence*, pages 454–464. PMLR, 2023b.

- [67] Katherine M Collins, Najoung Kim, Yonatan Bitton, Verena Rieser, Shayegan Omidshafiei, Yushi Hu, Sherol Chen, Senjuti Dutta, Minsuk Chang, Kimin Lee, et al. Beyond thumbs up/down: Untangling challenges of fine-grained feedback for text-to-image generation. In *Proceedings of the AAAI/ACM Conference on AI, Ethics, and Society*, volume 7, pages 293–303, 2024a.
- [68] Katherine M Collins, Ilia Sucholutsky, Umang Bhatt, Kartik Chandra, Lionel Wong, Mina Lee, Cedegao E Zhang, Tan Zhi-Xuan, Mark Ho, Vikash Mansinghka, et al. Building machines that learn and think with people. *Nature Human Behaviour*, 8(10):1851–1863, 2024b.
- [69] Colin Conwell, Jacob S Prince, Kendrick N Kay, George A Alvarez, and Talia Konkle. What can 1.8 billion regressions tell us about the pressures shaping high-level visual representation in brains and machines? *BioRxiv*, pages 2022–03, 2022.
- [70] Tolga Cukur, Shinji Nishimoto, Alexander G Huth, and Jack L Gallant. Attention during natural vision warps semantic representation across the human brain. *Nature neuroscience*, 16(6):763–770, 2013.
- [71] Max Dabagia, Konrad P. Kording, and Eva L. Dyer. Aligning latent representations of neural activity. *Nature Biomedical Engineering*, 7(4):337–343, 2023. ISSN 2157-846X. URL <https://www.nature.com/articles/s41551-022-00962-7>.
- [72] Joel Dapello, Kohitij Kar, Martin Schrimpf, Robert Geary, Michael Ferguson, David D Cox, and James J DiCarlo. Aligning model and macaque inferior temporal cortex representations improves model-to-human behavioral alignment and adversarial robustness. *bioRxiv*, pages 2022–07, 2022.
- [73] Angel Daruna, Lakshmi Nair, Weiyu Liu, and Sonia Chernova. Towards robust one-shot task execution using knowledge graph embeddings. In *2021 IEEE International Conference on Robotics and Automation (ICRA)*, pages 11118–11124. IEEE, 2021.
- [74] MohammadReza Davari, Stefan Horoi, Amine Natik, Guillaume Lajoie, Guy Wolf, and Eugene Belilovsky. Reliability of cka as a similarity measure in deep learning. In *The Eleventh International Conference on Learning Representations*, 2023.
- [75] Fatma Deniz, Christine Tseng, Leila Wehbe, Tom Dupré la Tour, and Jack L Gallant. Semantic representations during language comprehension are affected by context. *Journal of Neuroscience*, 43(17):3144–3158, 2023.
- [76] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- [77] Jörn Diedrichsen, Eva Berlot, Marieke Mur, Heiko H Schütt, and Nikolaus Kriegeskorte. Comparing representational geometries using the unbiased distance correlation. *arXiv*, 2020.
- [78] Diana C Dima, Tyler M Tomita, Christopher J Honey, and Leyla Isik. Social-affective features drive human representations of observed actions. *Elife*, 11:e75027, 2022.
- [79] Diana C Dima, Sugitha Janarthanan, Jody C Culham, and Yalda Mohsenzadeh. Shared representations of human actions across vision and language. *Neuropsychologia*, 202:108962, 2024.
- [80] Frances Ding, Jean-Stanislas Denain, and Jacob Steinhardt. Grounding representation similarity through statistical testing. *Advances in Neural Information Processing Systems*, 34:1556–1568, 2021.
- [81] Adrien Doerig, Rowan P Sommers, Katja Seeliger, Blake Richards, Jenann Ismael, Grace W Lindsay, Konrad P Kording, Talia Konkle, Marcel AJ Van Gerven, Nikolaus Kriegeskorte, et al. The neuroconnectionist research programme. *Nature Reviews Neuroscience*, pages 1–20, 2023.
- [82] Sarah Dolscheid, Shakila Shayan, Asifa Majid, and Daniel Casasanto. The thickness of musical pitch: Psychophysical evidence for linguistic relativity. *Psychological science*, 24(5):613–621, 2013.
- [83] Yinpeng Dong, Shouwei Ruan, Hang Su, Caixin Kang, Xingxing Wei, and Jun Zhu. ViewFool: evaluating the robustness of visual recognition to adversarial viewpoints. *arXiv preprint arXiv:2210.03895*, 2022.
- [84] Yuguang Duan and Gary Lupyan. Divergence in word meanings and its consequence for communication. In *Proceedings of the Annual Meeting of the Cognitive Science Society*, volume 45, 2023.
- [85] Marin Dujmović, Jeffrey S Bowers, Federico Adolphi, and Gaurav Malhotra. Some pitfalls of measuring representational similarity using representational similarity analysis. *bioRxiv*, pages 2022–04, 2022.
- [86] Lyndon Duong, Jingyang Zhou, Josue Nassar, Jules Berman, Jeroen Olieslagers, and Alex H Williams. Representational dissimilarity metric spaces for stochastic neural networks. In *The Eleventh International Conference on Learning Representations*, 2023.
- [87] Kshitij Dwivedi, Michael F. Bonner, Radoslaw Martin Cichy, and Gemma Roig. Unveiling functions of the visual cortex using task-specific deep neural networks. *PLOS Computational Biology*, 17(8):1–22, 08 2021.

- [88] Peter Eckersley. Impossibility and uncertainty theorems in ai value alignment (or why your AGI should not have a utility function). *arXiv preprint arXiv:1901.00064*, 2018.
- [89] Shimon Edelman. Representation is representation of similarities. *Behavioral and Brain Sciences*, 21(4):449–467, 1998. doi:10.1017/S0140525X98001253.
- [90] Gosta Ekman. Dimensions of color vision. *The Journal of Psychology*, 38(2):467–474, 1954.
- [91] Gamaleldin Elsayed, Shreya Shankar, Brian Cheung, Nicolas Papernot, Alexey Kurakin, Ian Goodfellow, and Jascha Sohl-Dickstein. Adversarial examples that fool both computer vision and time-limited humans. *Advances in neural information processing systems*, 31, 2018.
- [92] Kawin Ethayarajh, David Duvenaud, and Graeme Hirst. Towards understanding linear word analogies. *CoRR*, abs/1810.04882, 2018. URL <http://arxiv.org/abs/1810.04882>.
- [93] Matthew Farrell, Stefano Recanatesi, and Eric Shea-Brown. From lazy to rich to exclusive task representations in neural networks and neural codes. *Current Opinion in Neurobiology*, 83:102780, 2023.
- [94] Jenelle Feather, Alex Durango, Ray Gonzalez, and Josh McDermott. Metamers of neural networks reveal divergence from human perceptual systems. *Advances in Neural Information Processing Systems*, 32, 2019.
- [95] Callie Federer, Haoyan Xu, Alona Fyshe, and Joel Zylberberg. Improved object recognition using neural networks trained to mimic the brain’s statistical properties. *Neural Networks*, 131:103–114, 2020. ISSN 0893-6080.
- [96] Thomas Fel, Ivan F Rodriguez Rodriguez, Drew Linsley, and Thomas Serre. Harmonizing the object recognition strategies of deep neural networks with humans. *Advances in Neural Information Processing Systems*, 35: 9432–9446, 2022.
- [97] Chelsea Finn, Sergey Levine, and Pieter Abbeel. Guided cost learning: Deep inverse optimal control via policy optimization. In *Proceedings of the 33rd International Conference on International Conference on Machine Learning - Volume 48*, page 49–58, 2016.
- [98] Chelsea Finn, Pieter Abbeel, and Sergey Levine. Model-agnostic meta-learning for fast adaptation of deep networks. In *Proceedings of the 34th International Conference on Machine Learning - Volume 70*, page 1126–1135, 2017.
- [99] Susan T Fiske. Stereotype content: Warmth and competence endure. *Current Directions in Psychological Science*, 27(2):67–73, 2018.
- [100] Stanislav Fort, Huiyi Hu, and Balaji Lakshminarayanan. Deep ensembles: A loss landscape perspective. *arXiv preprint arXiv:1912.02757*, 2019.
- [101] Michael C Frank, Daniel L Everett, Evelina Fedorenko, and Edward Gibson. Number as a cognitive technology: Evidence from pirahã language and cognition. *Cognition*, 108(3):819–824, 2008.
- [102] Dan Friedman, Andrew Kyle Lampinen, Lucas Dixon, Danqi Chen, and Asma Ghandeharioun. Comparing representational and functional similarity in small transformer language models. In *UniReps: the First Workshop on Unifying Representations in Neural Models*, 2023.
- [103] Dan Friedman, Andrew Lampinen, Lucas Dixon, Danqi Chen, and Asma Ghandeharioun. Interpretability illusions in the generalization of simplified models. *Proceedings of the 41st International Conference on Machine Learning*, 2024.
- [104] Stephanie Fu, Netanel Tamir, Shobhita Sundaram, Lucy Chai, Richard Zhang, Tali Dekel, and Phillip Isola. Dreamsim: Learning new dimensions of human visual similarity using synthetic data. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, editors, *Advances in Neural Information Processing Systems*, volume 36, pages 50742–50768. Curran Associates, Inc., 2023.
- [105] Christina M Funke, Judy Borowski, Karolina Stosio, Wieland Brendel, Thomas SA Wallis, and Matthias Bethge. Five points to check when comparing visual perception in humans and machines. *Journal of Vision*, 21(3):16–16, 2021.
- [106] Alona Fyshe, Leila Wehbe, Partha Pratim Talukdar, Brian Murphy, and Tom M. Mitchell. A compositional and interpretable semantic space. In Rada Mihalcea, Joyce Yue Chai, and Anoop Sarkar, editors, *NAACL HLT 2015, The 2015 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Denver, Colorado, USA, May 31 - June 5, 2015*, pages 32–41. The Association for Computational Linguistics, 2015. doi:10.3115/V1/N15-1004. URL <https://doi.org/10.3115/v1/n15-1004>.
- [107] Iason Gabriel. Artificial intelligence, values, and alignment. *Minds and machines*, 30(3):411–437, 2020.
- [108] Kathy Garcia, Emalie McMahon, Colin Conwell, Michael F Bonner, and Leyla Isik. Modeling dynamic social vision highlights gaps between deep learning and humans. 2024.

- [109] Robert Geirhos, Carlos RM Temme, Jonas Rauber, Heiko H Schütt, Matthias Bethge, and Felix A Wichmann. Generalisation in humans and deep neural networks. *Advances in Neural Information Processing Systems*, 31, 2018.
- [110] Robert Geirhos, Patricia Rubisch, Claudio Michaelis, Matthias Bethge, Felix A Wichmann, and Wieland Brendel. ImageNet-trained CNNs are biased towards texture; increasing shape bias improves accuracy and robustness. In *International Conference on Learning Representations*, 2019.
- [111] Robert Geirhos, Kristof Meding, and Felix A Wichmann. Beyond accuracy: quantifying trial-by-trial behaviour of CNNs and humans by measuring error consistency. *Advances in Neural Information Processing Systems*, 33: 13890–13902, 2020a.
- [112] Robert Geirhos, Kantharaju Narayanappa, Benjamin Mitzkus, Matthias Bethge, Felix A Wichmann, and Wieland Brendel. On the surprising similarities between supervised and self-supervised models. *arXiv preprint arXiv:2010.08377*, 2020b.
- [113] Robert Geirhos, Kantharaju Narayanappa, Benjamin Mitzkus, Tizian Thieringer, Matthias Bethge, Felix A. Wichmann, and Wieland Brendel. Partial success in closing the gap between human and machine vision. In *Advances in Neural Information Processing Systems*, pages 23885–23899, 2021.
- [114] Robert Geirhos, Roland S Zimmermann, Blair Bilodeau, Wieland Brendel, and Been Kim. Don’t trust your eyes: on the (un) reliability of feature visualizations. In *Forty-first International Conference on Machine Learning*, 2023.
- [115] Asma Ghandeharioun, Been Kim, Chun-Liang Li, Brendan Jou, Brian Eoff, and Rosalind Picard. Dissect: Disentangled simultaneous explanations via concept traversals. In *International Conference on Learning Representations*, 2021.
- [116] Charles Godfrey, Davis Brown, Tegan Emerson, and Henry Kvinge. On the symmetries of deep learning models and their internal representations. *Advances in Neural Information Processing Systems*, 35:11893–11905, 2022.
- [117] Tal Golan, Prashant C Raju, and Nikolaus Kriegeskorte. Controversial stimuli: Pitting neural networks against each other as models of human cognition. *Proceedings of the National Academy of Sciences*, 117(47):29330–29337, 2020.
- [118] Tal Golan, Wenxuan Guo, Heiko H Schütt, and Nikolaus Kriegeskorte. Distinguishing representational geometries with controversial stimuli: Bayesian experimental design and its application to face dissimilarity judgments. *arXiv preprint arXiv:2211.15053*, 2022.
- [119] Ariel Goldstein, Zaid Zada, Eliav Buchnik, Mariano Schain, Amy Price, Bobbi Aubrey, Samuel A Nastase, Amir Feder, Dotan Emanuel, Alon Cohen, et al. Shared computational principles for language processing in humans and deep language models. *Nature neuroscience*, 25(3):369–380, 2022.
- [120] Robert L Goldstone and Brian J Rogosky. Using relations within conceptual systems to translate across conceptual systems. *Cognition*, 84(3):295–320, 2002.
- [121] Erin Grant, Iliia Sucholutsky, Jascha Achterberg, Katherine Hermann, and Lukas Muttenthaler. First workshop on representational alignment (re-align). In *ICLR 2024 Workshops*, 2024. URL <https://openreview.net/forum?id=bTkdoH5CuG>.
- [122] David M Green. Consistency of auditory detection judgments. *Psychological Review*, 71(5):392–407, 1964.
- [123] Arthur Gretton, Olivier Bousquet, Alex Smola, and Bernhard Schölkopf. Measuring statistical dependence with hilbert-schmidt norms. In Sanjay Jain, Hans Ulrich Simon, and Etsuji Tomita, editors, *Algorithmic Learning Theory*. Springer Berlin Heidelberg, 2005.
- [124] Thomas L Griffiths and Michael L Kalish. A bayesian view of language evolution by iterated learning. In *Proceedings of the annual meeting of the cognitive science society*, volume 27, 2005.
- [125] Thomas L. Griffiths, Sreejan Kumar, and R. Thomas McCoy. On the hazards of relating representations and inductive biases. *Behavioral and Brain Sciences*, 46:e275, 2023. doi:10.1017/S0140525X23002042.
- [126] Kalanit Grill-Spector, Richard Henson, and Alex Martin. Repetition and the brain: neural models of stimulus-specific effects. *Trends in cognitive sciences*, 10(1):14–23, 2006.
- [127] Iris IA Groen, Michelle R Greene, Christopher Baldassano, Li Fei-Fei, Diane M Beck, and Chris I Baker. Distinct contributions of functional and deep neural network features to representational similarity of scenes in human brain and behavior. *Elife*, 7:e32962, 2018.
- [128] Umut Güçlü and Marcel AJ van Gerven. Deep neural networks reveal a gradient in the complexity of neural representations across the ventral stream. *Journal of Neuroscience*, 35(27):10005–10014, 2015.

- [129] Umut Güçlü and Marcel AJ van Gerven. Increasingly complex representations of natural movies across the dorsal stream are shared between subjects. *NeuroImage*, 145:329–336, 2017.
- [130] Tanmay Gupta, Kevin Shih, Saurabh Singh, and Derek Hoiem. Aligned image-word representations improve inductive transfer across vision-language tasks. In *Proceedings of the IEEE International Conference on Computer Vision*, pages 4213–4222, 2017.
- [131] Dylan Hadfield-Menell, Smitha Milli, Pieter Abbeel, Stuart J Russell, and Anca Dragan. Inverse reward design. *Advances in Neural Information Processing Systems*, 30, 2017.
- [132] Peter Harrison, Raja Marjeh, Federico Adolfi, Pol van Rijn, Manuel Anglada-Tort, Ofer Tchernichovski, Pauline Larrouy-Maestri, and Nori Jacoby. Gibbs sampling with people. *Advances in Neural Information Processing Systems*, 33:10659–10671, 2020.
- [133] Sarah E Harvey, Brett W Larsen, and Alex H Williams. Duality of bures and shape distances with implications for comparing neural representations. *arXiv preprint arXiv:2311.11436*, 2023.
- [134] Nick Haslam and Steve Loughnan. Dehumanization and infrahumanization. *Annual review of psychology*, 65: 399–423, 2014.
- [135] Uri Hasson, Yuval Nir, Ifat Levy, Galit Fuhrmann, and Rafael Malach. Intersubject synchronization of cortical activity during natural vision. *Science*, 303(5664):1634–1640, 2004.
- [136] Uri Hasson, Asif A Ghazanfar, Bruno Galantucci, Simon Garrod, and Christian Keysers. Brain-to-brain coupling: a mechanism for creating and sharing a social world. *Trends in cognitive sciences*, 16(2):114–121, 2012a.
- [137] Uri Hasson, Asif A Ghazanfar, Bruno Galantucci, Simon Garrod, and Christian Keysers. Brain-to-brain coupling: a mechanism for creating and sharing a social world. *Trends in cognitive sciences*, 16(2):114–121, 2012b.
- [138] Uri Hasson, Janice Chen, and Christopher J Honey. Hierarchical process memory: memory as an integral component of information processing. *Trends in cognitive sciences*, 19(6):304–313, 2015.
- [139] W Keith Hastings. Monte Carlo sampling methods using Markov chains and their applications. 1970.
- [140] James V Haxby, J Swaroop Guntupalli, Andrew C Connolly, Yaroslav O Halchenko, Bryan R Conroy, M Ida Gobbini, Michael Hanke, and Peter J Ramadge. A common, high-dimensional model of the representational space in human ventral temporal cortex. *Neuron*, 72(2):404–416, 2011.
- [141] James V Haxby, J Swaroop Guntupalli, Samuel A Nastase, and Ma Feilong. Hyperalignment: Modeling shared information encoded in idiosyncratic cortical topographies. *elife*, 9:e56601, 2020.
- [142] Martin N Hebart, Charles Y Zheng, Francisco Pereira, and Chris I Baker. Revealing the multidimensional mental representations of natural objects underlying human similarity judgements. *Nature Human Behaviour*, 4(11): 1173–1185, 2020.
- [143] Joseph Henrich, Steven J Heine, and Ara Norenzayan. Most people are not weird. *Nature*, 466(7302):29–29, 2010a.
- [144] Joseph Henrich, Steven J Heine, and Ara Norenzayan. The weirdest people in the world? *Behavioral and brain sciences*, 33(2-3):61–83, 2010b.
- [145] Katherine Hermann and Andrew Lampinen. What shapes feature representations? exploring datasets, architectures, and training. *Advances in Neural Information Processing Systems*, 33:9995–10006, 2020.
- [146] Katherine Hermann, Ting Chen, and Simon Kornblith. The origins and prevalence of texture bias in convolutional neural networks. In H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin, editors, *Advances in Neural Information Processing Systems*, volume 33, pages 19000–19015, 2020.
- [147] Katherine L Hermann, Hossein Mobahi, Thomas Fel, and Michael C Mozer. On the foundations of shortcut learning. *arXiv preprint arXiv:2310.16228*, 2023.
- [148] Pablo Hernández-Cámara, Jorge Vila-Tomás, Valero Laparra, and Jesus Malo. Dissecting the effectiveness of deep features as a perceptual metric. *Available at SSRN 4609207*, 2023.
- [149] Pablo Hernández-Cámara, Jorge Vila-Tomás, Jesus Malo, and Valero Laparra. Measuring human-clip alignment at different abstraction levels. In *ICLR 2024 Workshop on Representational Alignment*, 2024.
- [150] Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. Distilling the knowledge in a neural network. *arXiv preprint arXiv:1503.02531*, 2015.
- [151] Geoffrey E Hinton et al. Learning distributed representations of concepts. In *Proceedings of the eighth annual conference of the cognitive science society*, volume 1, page 12. Amherst, MA, 1986.

- [152] Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural Computation*, 9(8):1735–1780, 1997.
- [153] Paul Hoffman. An individual differences approach to semantic cognition: Divergent effects of age on representation, retrieval and selection. *Scientific reports*, 8(1):8145, 2018.
- [154] Nora Hollenstein, Maria Barrett, Marius Troendle, Francesco Bigioli, Nicolas Langer, and Ce Zhang. Advancing nlp with cognitive language processing signals. *arXiv preprint arXiv:1904.02682*, 2019.
- [155] Tomoyasu Horikawa and Yukiyasu Kamitani. Generic decoding of seen and imagined objects using hierarchical visual features. *Nature Communications*, 8(1):15037, 2017.
- [156] Tomoyasu Horikawa and Yukiyasu Kamitani. Attention modulates neural representation to render reconstructions according to subjective appearance. *Communications Biology*, 5(34), 2022.
- [157] Stefan Horoi, Albert Manuel Orozco Camacho, Eugene Belilovsky, and Guy Wolf. Harmony in diversity: Merging neural networks with canonical correlation analysis. In *Forty-first International Conference on Machine Learning*, 2024.
- [158] Eghbal A Hosseini, Noga Zaslavsky, Colton Casto, and Evelina Fedorenko. Teasing apart the representational spaces of ann language models to discover key axes of model-to-brain alignment. In *Conference on Cognitive Computational Neuroscience (CCN 2023)*, Oxford, UK, Aug, pages 24–27, 2023.
- [159] Qingqing Huang, Aren Jansen, Joonseok Lee, Ravi Ganti, Judith Yue Li, and Daniel PW Ellis. Mulan: A joint embedding of music audio and natural language. *arXiv preprint arXiv:2208.12415*, 2022.
- [160] Lukas S Huber, Robert Geirhos, and Felix A Wichmann. The developmental trajectory of object recognition robustness: children are like small adults but unlike big deep neural networks. *Journal of Vision*, 2022.
- [161] Evan Hubinger, Chris van Merwijk, Vladimir Mikulik, Joar Skalse, and Scott Garrabrant. Risks from learned optimization in advanced machine learning systems. *arXiv preprint arXiv:1906.01820*, 2019.
- [162] Minyoung Huh, Brian Cheung, Tongzhou Wang, and Phillip Isola. The platonic representation hypothesis. *arXiv preprint arXiv:2405.07987*, 2024.
- [163] Leyla Isik, Jedediah Singer, Joseph R Madsen, Nancy Kanwisher, and Gabriel Kreiman. What is changing when: Decoding visual information in movies from human intracranial recordings. *Neuroimage*, 180:147–159, 2018.
- [164] Robert A Jacobs and Christopher J Bates. Comparing the visual representations and performance of humans and deep neural networks. *Current Directions in Psychological Science*, 28(1):34–39, 2019.
- [165] Nori Jacoby and Josh H McDermott. Integer ratio priors on musical rhythm revealed cross-culturally by iterated reproduction. *Current Biology*, 27(3):359–370, 2017.
- [166] Nori Jacoby, Eduardo A Undurraga, Malinda J McPherson, Joaquín Valdés, Tomás Ossandón, and Josh H McDermott. Universal and non-universal features of musical pitch perception revealed by singing. *Current Biology*, 29(19):3229–3243, 2019.
- [167] Nori Jacoby, Rainer Polak, Jessica Grahn, Daniel J Cameron, Kyung Myun Lee, Ricardo Godoy, Eduardo A Undurraga, Tomas Huanca, Timon Thalwitzer, Noumouké Doumbia, et al. Universality and cross-cultural variation in mental representations of music revealed by global comparison of rhythm priors. *PsyArXiv*, 2021a.
- [168] Nori Jacoby, Rainer Polak, Jessica Grahn, Daniel J Cameron, Kyung Myun Lee, Ricardo Godoy, Eduardo A Undurraga, Tomas Huanca, Timon Thalwitzer, Noumouké Doumbia, et al. Universality and cross-cultural variation in mental representations of music revealed by global comparison of rhythm priors. *PsyArXiv*, 2021b.
- [169] Akshay V Jagadeesh and Justin L Gardner. Texture-like representation of objects in human visual cortex. *Proceedings of the National Academy of Sciences*, 119(17):e2115302119, 2022.
- [170] Shailee Jain and Alexander G Huth. Incorporating context into language encoding models for fmri. In *NIPS*, pages 6629–6638, 2018.
- [171] Priyank Jaini, Kevin Clark, and Robert Geirhos. Intriguing properties of generative classifiers. In *The Twelfth International Conference on Learning Representations*, 2023.
- [172] Kamila M Jozwik, Nikolaus Kriegeskorte, and Marieke Mur. Visual features as stepping stones toward semantics: Explaining object similarity in it and perception with non-negative least squares. *Neuropsychologia*, 83:201–226, 2016.
- [173] Lukasz Kaiser, Aidan N. Gomez, Noam Shazeer, Ashish Vaswani, Niki Parmar, Llion Jones, and Jakob Uszkoreit. One model to learn them all. *arXiv preprint arXiv:1706.05137*, 2017.
- [174] Nancy Kanwisher, Josh McDermott, and Marvin M Chun. The fusiform face area: a module in human extrastriate cortex specialized for face perception. *Journal of Neuroscience*, 17(11):4302–4311, 1997.

- [175] Dimokratis Karamanlis, Helene Marianne Schreyer, and Tim Gollisch. Retinal encoding of natural scenes. *Annual Review of Vision Science*, 8:171–193, 2022.
- [176] Andrej Karpathy and Li Fei-Fei. Deep visual-semantic alignments for generating image descriptions. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2015.
- [177] Carina Kauf, Greta Tuckute, Roger P Levy, Jacob Andreas, and Evelina Fedorenko. Lexical semantic content, not syntactic structure, is the main contributor to ANN-brain similarity of fmri responses in the language network. *Neurobiology of Language*, pages 1–81, 2023.
- [178] Genji Kawakita, Ariel Mikhael Zeleznikow-Johnston, Ken Takeda, Naotsugu Tsuchiya, and Masafumi Oizumi. Is my "red" your "red"?: Unsupervised alignment of qualia structures via optimal transport. In *ICLR 2024 Workshop on Representational Alignment*, 2023.
- [179] Alexander JE Kell, Daniel LK Yamins, Erica N Shook, Sam V Norman-Haignere, and Josh H McDermott. A task-optimized neural network replicates human auditory behavior, predicts brain responses, and reveals a cortical processing hierarchy. *Neuron*, 98(3):630–644, 2018.
- [180] Seyed-Mahdi Khaligh-Razavi and Nikolaus Kriegeskorte. Deep supervised, but not unsupervised, models may explain it cortical representation. *PLoS Computational Biology*, 10(11):e1003915, 2014.
- [181] Seyed-Mahdi Khaligh-Razavi, Linda Henriksson, Kendrick Kay, and Nikolaus Kriegeskorte. Fixed versus mixed rsa: Explaining visual representations by fixed and mixed feature sets from shallow and deep computational models. *Journal of Mathematical Psychology*, 76:184–197, 2017.
- [182] Meenakshi Khosla and Leila Wehbe. High-level visual areas act like domain-general filters with strong selectivity and functional specialization. *bioRxiv*, pages 2022–03, 2022.
- [183] Meenakshi Khosla and Alex H Williams. Soft matching distance: A metric on neural representations that captures single-neuron tuning. *arXiv preprint arXiv:2311.09466*, 2023.
- [184] Tim C Kietzmann, Courtney J Spoerer, Lynn KA Sörensen, Radoslaw M Cichy, Olaf Hauk, and Nikolaus Kriegeskorte. Recurrence is required to capture the representational dynamics of the human visual system. *Proceedings of the National Academy of Sciences*, 116(43):21854–21863, 2019.
- [185] Been Kim, Martin Wattenberg, Justin Gilmer, Carrie Cai, James Wexler, Fernanda Viegas, et al. Interpretability beyond feature attribution: Quantitative testing with concept activation vectors (tcav). In *International conference on machine learning*, pages 2668–2677, 2018.
- [186] Yoon Kim and Alexander M. Rush. Sequence-level knowledge distillation. In Jian Su, Xavier Carreras, and Kevin Duh, editors, *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing, EMNLP 2016, Austin, Texas, USA, November 1-4, 2016*, pages 1317–1327. The Association for Computational Linguistics, 2016.
- [187] Marcie L. King, Iris I.A. Groen, Adam Steel, Dwight J. Kravitz, and Chris I. Baker. Similarity judgments and cortical visual responses reflect different properties of object and scene categories in naturalistic images. *NeuroImage*, 197:368–382, 2019. ISSN 1053-8119.
- [188] Jan H Kirchner, Logan Smith, Jacques Thibodeau, Kyle McDonell, and Laria Reynolds. Researching alignment research: Unsupervised analysis. *arXiv preprint arXiv:2206.02841*, 2022.
- [189] Max Klabunde, Tobias Schumacher, Markus Strohmaier, and Florian Lemmerich. Similarity of neural network models: A survey of functional and representational measures, 2023.
- [190] Pang Wei Koh, Thao Nguyen, Yew Siang Tang, Stephen Mussmann, Emma Pierson, Been Kim, and Percy Liang. Concept bottleneck models. In *International Conference on Machine Learning*, pages 5338–5348, 2020.
- [191] Lawrence Kohlberg. *The psychology of moral development: The nature and validity of moral stages*. Harper & Row, 1984.
- [192] Talia Konkle and George A Alvarez. A self-supervised domain-general learning framework for human ventral stream representation. *Nature communications*, 13(1):491, 2022.
- [193] Talia Konkle, Colin Conwell, Jacob S Prince, and George A Alvarez. What can 5.17 billion regression fits tell us about the representational format of the high-level human visual system? *Journal of Vision*, 22(14):4422–4422, 2022.
- [194] Simon Kornblith, Mohammad Norouzi, Honglak Lee, and Geoffrey Hinton. Similarity of neural network representations revisited. In Kamalika Chaudhuri and Ruslan Salakhutdinov, editors, *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pages 3519–3529, 2019.

- [195] Atesh Koul, Davide Ahmar, Gian Domenico Iannetti, and Giacomo Novembre. Spontaneous dyadic behaviour predicts the emergence of interpersonal neural synchrony. *NeuroImage*, 277:120233, 2023. ISSN 1053-8119.
- [196] Tom Kouwenhoven, Max Peepkorn, Bram Van Dijk, and Tessa Verhoef. The curious case of representational alignment: Unravelling visio-linguistic tasks in emergent communication. *arXiv preprint arXiv:2407.17960*, 2024.
- [197] Nikolaus Kriegeskorte and Marieke Mur. Inverse mds: Inferring dissimilarity structure from multiple item arrangements. *Frontiers in Psychology*, 3:245, 2012.
- [198] Nikolaus Kriegeskorte, Marieke Mur, and Peter A Bandettini. Representational similarity analysis-connecting the branches of systems neuroscience. *Frontiers in Systems Neuroscience*, 2008a.
- [199] Nikolaus Kriegeskorte, Marieke Mur, Douglas A Ruff, Roozbeh Kiani, Jerzy Bodurka, Hossein Esteky, Keiji Tanaka, and Peter A Bandettini. Matching categorical object representations in inferior temporal cortex of man and monkey. *Neuron*, 60(6):1126–1141, 2008b.
- [200] Ranjay Krishna, Yuke Zhu, Oliver Groth, Justin Johnson, Kenji Hata, Joshua Kravitz, Stephanie Chen, Yannis Kalantidis, Li-Jia Li, David A. Shamma, Michael S. Bernstein, and Li Fei-Fei. Visual genome: Connecting language and vision using crowdsourced dense image annotations. *International Journal of Computer Vision*, 123(1):32–73, 2017. doi:10.1007/s11263-016-0981-7. URL <https://doi.org/10.1007/s11263-016-0981-7>.
- [201] Jonas Kubilius, Stefania Bracci, and Hans P. Op de Beeck. Deep neural networks as a computational model for human shape sensitivity. *PLOS Computational Biology*, 12:1–26, 04 2016.
- [202] Jonas Kubilius, Martin Schrimpf, Kohitij Kar, Rishi Rajalingham, Ha Hong, Najib Majaj, Elias Issa, Pouya Bashivan, Jonathan Prescott-Roy, Kailyn Schmidt, Aran Nayebi, Daniel Bear, Daniel L Yamins, and James J DiCarlo. Brain-like object recognition with high-performing shallow recurrent ANNs. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 32, 2019.
- [203] Sreejan Kumar, Cameron T Ellis, Thomas P O’Connell, Marvin M Chun, and Nicholas B Turk-Browne. Searching through functional space reveals distributed visual, auditory, and semantic coding in the human brain. *PLOS Computational Biology*, 16(12):e1008457, 2020.
- [204] Sreejan Kumar, Ishita Dasgupta, Jonathan Cohen, Nathaniel Daw, and Thomas Griffiths. Meta-learning of structured task distributions in humans and machines. In *International Conference on Learning Representations*, 2021. URL <https://openreview.net/forum?id=-gvHfE3Xf5>.
- [205] Sreejan Kumar, Carlos G Correa, Ishita Dasgupta, Raja Marjeh, Michael Y Hu, Robert Hawkins, Jonathan D Cohen, Karthik Narasimhan, Tom Griffiths, et al. Using natural language and program abstractions to instill human inductive biases in machines. *Advances in Neural Information Processing Systems*, 35:167–180, 2022.
- [206] Sreejan Kumar, Ishita Dasgupta, Nathaniel D. Daw, Jonathan. D. Cohen, and Thomas L. Griffiths. Disentangling abstraction from statistical pattern matching in human and machine learning. *PLOS Computational Biology*, 19(8):1–21, 08 2023a. doi:10.1371/journal.pcbi.1011316. URL <https://doi.org/10.1371/journal.pcbi.1011316>.
- [207] Sreejan Kumar, Theodore R. Sumers, Takateru Yamakoshi, Ariel Goldstein, Uri Hasson, Kenneth A. Norman, Thomas L. Griffiths, Robert D. Hawkins, and Samuel A. Nastase. Shared functional specialization in transformer-based language models and the human brain. *bioRxiv*, 2023b. doi:10.1101/2022.06.08.495348. URL <https://www.biorxiv.org/content/early/2023/07/21/2022.06.08.495348>.
- [208] Benjamin Lahner, Kshitij Dwivedi, Polina Iamshchinina, Monika Graumann, Alex Lascelles, Gemma Roig, Alessandro Thomas Gifford, Bowen Pan, SouYoung Jin, N Apurva Ratan Murty, et al. Modeling short visual events through the bold moments video fmri dataset and metadata. *Nature communications*, 15(1):6241, 2024.
- [209] Balaji Lakshminarayanan, Alexander Pritzel, and Charles Blundell. Simple and scalable predictive uncertainty estimation using deep ensembles. In I. Guyon, U. Von Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 30, 2017.
- [210] Andrew Kyle Lampinen, Stephanie CY Chan, and Katherine Hermann. Learned feature representations are biased by complexity, learning order, position, and more. *Transactions on Machine Learning Research*, 2024.
- [211] Barbara Landau, Linda B Smith, and Susan S Jones. The importance of shape in early lexical learning. *Cognitive development*, 3(3):299–321, 1988.
- [212] Richard D Lange, Devin Kwok, Jordan Kyle Matelsky, Xinyue Wang, David Rolnick, and Konrad Kording. Deep networks as paths on the manifold of neural representations. In Timothy Doster, Tegan Emerson, Henry Kvinge, Nina Miolane, Mathilde Papillon, Bastian Rieck, and Sophia Sanborn, editors, *Proceedings of 2nd Annual*

- Workshop on Topology, Algebra, and Geometry in Machine Learning (TAG-ML)*, volume 221 of *Proceedings of Machine Learning Research*, pages 102–133. PMLR, 28 Jul 2023.
- [213] Thomas Langlois, Nori Jacoby, Jordan W Suchow, and Thomas L Griffiths. Uncovering visual priors in spatial memory using serial reproduction. In *Proceedings of the 39th Annual Meeting of the Cognitive Science Society*, 2017.
- [214] Thomas Langlois, Haicheng Zhao, Erin Grant, Ishita Dasgupta, Tom Griffiths, and Nori Jacoby. Passive attention in artificial neural networks predicts human visual selectivity. *Advances in Neural Information Processing Systems*, 34:27094–27106, 2021a.
- [215] Thomas A Langlois, Nori Jacoby, Jordan W Suchow, and Thomas L Griffiths. Serial reproduction reveals the geometry of visuospatial representations. *Proceedings of the National Academy of Sciences*, 118(13): e2012938118, 2021b.
- [216] Sebastian Lapuschkin, Stephan Wäldchen, Alexander Binder, Grégoire Montavon, Wojciech Samek, and Klaus-Robert Müller. Unmasking clever hans predictors and assessing what machines really learn. *Nature communications*, 10(1):1096, 2019.
- [217] Simon B Laughlin. Energy as a constraint on the coding and processing of sensory information. *Current opinion in neurobiology*, 11(4):475–480, 2001.
- [218] Yann LeCun and Yoshua Bengio. *Convolutional Networks for Images, Speech, and Time Series*, page 255–258. MIT Press, 1998.
- [219] Yann LeCun, Yoshua Bengio, and Geoffrey Hinton. Deep learning. *Nature*, 521(7553):436–444, 2015.
- [220] Mark D Lescroart, Dustin E Stansbury, and Jack L Gallant. Fourier power, subjective distance, and object categories all provide plausible models of bold responses in scene-selective visual areas. *Frontiers in computational neuroscience*, 9:135, 2015.
- [221] Sergey Levine, Zoran Popovic, and Vladlen Koltun. Feature construction for inverse reinforcement learning. In *Advances in Neural Information Processing Systems*, pages 1342–1350, 2010.
- [222] Qiang Li, Alex Gomez-Villa, Marcelo Bertalmío, and Jesús Malo. Contrast sensitivity functions in autoencoders. *Journal of Vision*, 22(6):8–8, 2022.
- [223] Youwei Liang, Junfeng He, Gang Li, Peizhao Li, Arseniy Klimovskiy, Nicholas Carolan, Jiao Sun, Jordi Pont-Tuset, Sarah Young, Feng Yang, et al. Rich human feedback for text-to-image generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 19401–19411, 2024.
- [224] Grace W Lindsay, Josh Merel, Tom Mrsic-Flogel, and Maneesh Sahani. Divergent representations of ethological visual inputs emerge from supervised, unsupervised, and reinforcement learning. *arXiv preprint arXiv:2112.02027*, 2021.
- [225] Lorenz Linhardt, Marco Morik, Sidney Bender, and Naima Elosegui Borrás. An analysis of human alignment of latent diffusion models. *arXiv preprint arXiv:2403.08469*, 2024.
- [226] Benjamin Lipkin, Lionel Wong, Gabriel Grand, and Joshua B Tenenbaum. Evaluating statistical language models as pragmatic reasoners. *arXiv preprint arXiv:2305.01020*, 2023.
- [227] Han Liu, Yizhou Tian, Chacha Chen, Shi Feng, Yuxin Chen, and Chenhao Tan. Learning human-compatible representations for case-based decision support. *arXiv preprint arXiv:2303.04809*, 2023.
- [228] Tong Liu, Iza Škrjanec, and Vera Demberg. Temperature-scaling surprisal estimates improve fit to human reading times—but does it do so for the “right reasons”? In *ICLR 2024 Workshop on Representational Alignment*, 2024.
- [229] Yichuan Liu, Elise A Piazza, Erez Simony, Patricia A Shewokis, Banu Onaral, Uri Hasson, and Hasan Ayaz. Measuring speaker–listener neural coupling with functional near infrared spectroscopy. *Scientific Reports*, 7 (43293), 2017.
- [230] John Locke. *An essay concerning human understanding*. Kay & Troutman, 1847.
- [231] Ben Lonnqvist, Alasdair DF Clarke, and Ramakrishna Chakravarthi. Crowding in humans is unlike that in convolutional neural networks. *Neural Networks*, 126:262–274, 2020.
- [232] Qihong Lu, Po-Hsuan Chen, Jonathan W Pillow, Peter J Ramadge, Kenneth A Norman, and Uri Hasson. Shared representational geometry across neural networks. *arXiv preprint arXiv:1811.11684*, 2018.
- [233] Jinqi Luo, Tianjiao Ding, Kwan Ho Ryan Chan, Darshan Thaker, Aditya Chattopadhyay, Chris Callison-Burch, and René Vidal. Pace: Parsimonious concept engineering for large language models. *arXiv preprint arXiv:2406.04331*, 2024.

- [234] Hoai Luu-Duc and Jun Miura. An incremental feature set refinement in a programming by demonstration scenario. In *2019 IEEE 4th International Conference on Advanced Robotics and Mechatronics (ICARM)*, pages 372–377. IEEE, 2019.
- [235] Michael L Mack, Bradley C Love, and Alison R Preston. Dynamic updating of hippocampal object representations reflects new conceptual knowledge. *Proceedings of the National Academy of Sciences*, 113(46):13203–13208, 2016.
- [236] Florian P Mahner, Lukas Muttenthaler, Umut Güçlü, and Martin N Hebart. Dimensions underlying the representational alignment of deep neural networks with humans. *arXiv preprint arXiv:2406.19087*, 2024.
- [237] Valentino Maiorca, Luca Moschella, Antonio Norelli, Marco Fumero, Francesco Locatello, and Emanuele Rodolà. Latent space translation via semantic alignment. *arXiv preprint arXiv:2311.00664*, 2023.
- [238] Asifa Majid and Niclas Burenhult. Odors are expressible in language, as long as you speak the right language. *Cognition*, 130(2):266–270, 2014.
- [239] Asifa Majid, Melissa Bowerman, Sotaro Kita, Daniel BM Haun, and Stephen C Levinson. Can language restructure cognition? The case for space. *Trends in Cognitive Sciences*, 8(3):108–114, 2004.
- [240] George L Malcolm, Iris IA Groen, and Chris I Baker. Making sense of real-world scenes. *Trends in cognitive sciences*, 20(11):843–856, 2016.
- [241] Gaurav Malhotra, Marin Dujmović, and Jeffrey S Bowers. Feature blindness: a challenge for understanding and modelling visual object recognition. *PLOS Computational Biology*, 18(5):e1009572, 2022.
- [242] Horia Mania, John Miller, Ludwig Schmidt, Moritz Hardt, and Benjamin Recht. Model similarity mitigates test set overuse. *Advances in Neural Information Processing Systems*, 32, 2019.
- [243] Christopher D Manning, Kevin Clark, John Hewitt, Urvashi Khandelwal, and Omer Levy. Emergent linguistic structure in artificial neural networks trained by self-supervision. *Proceedings of the National Academy of Sciences*, 117(48):30046–30054, 2020.
- [244] Elman Mansimov, Emilio Parisotto, Lei Jimmy Ba, and Ruslan Salakhutdinov. Generating images from captions with attention. *4th International Conference on Learning Representations, ICLR*, 2016.
- [245] Raja Marjeh, Iliia Sucholutsky, Theodore R Sumers, Nori Jacoby, and Thomas L Griffiths. Predicting human similarity judgments using large language models. *arXiv preprint arXiv:2202.04728*, 2022.
- [246] Raja Marjeh, Pol Van Rijn, Iliia Sucholutsky, Theodore Sumers, Harin Lee, Thomas L. Griffiths, and Nori Jacoby. Words are all you need? language as an approximation for human similarity judgments. In *The Eleventh International Conference on Learning Representations*, 2023a.
- [247] Raja Marjeh, Iliia Sucholutsky, Thomas A Langlois, Nori Jacoby, and Thomas L. Griffiths. Analyzing diffusion as serial reproduction. In *Proceedings of the 40th International Conference on Machine Learning*. PMLR, 2023b.
- [248] Raja Marjeh, Peter MC Harrison, Harin Lee, Fotini Deligiannaki, and Nori Jacoby. Timbral effects on consonance disentangle psychoacoustic mechanisms and suggest perceptual origins for musical scales. *Nature Communications*, 15(1):1482, 2024a.
- [249] Raja Marjeh, Iliia Sucholutsky, Pol van Rijn, Nori Jacoby, and Thomas L Griffiths. Large language models predict human sensory judgments across six modalities. *Scientific Reports*, 14(1):21445, 2024b.
- [250] Rogier B. Mars, Saâd Jbabdi, and Matthew F. S. Rushworth. A common space approach to comparative neuroscience. *Annual review of neuroscience*, 2021. URL <https://api.semanticscholar.org/CorpusID:231804835>.
- [251] Louis Marti, Shengyi Wu, Steven T Piantadosi, and Celeste Kidd. Latent diversity in human concepts. *Open Mind*, 7:79–92, 2023.
- [252] Patrick McClure and Nikolaus Kriegeskorte. Representational distance learning for deep neural networks. *Frontiers in computational neuroscience*, 10:131, 2016.
- [253] Josh H McDermott, Andriana J Lehr, and Andrew J Oxenham. Individual differences reveal the basis of consonance. *Current Biology*, 20(11):1035–1041, 2010.
- [254] Emalie McMahan, Michael F Bonner, and Leyla Isik. Hierarchical organization of social action features along the lateral visual pathway. *Current Biology*, 33(23):5035–5047, 2023.
- [255] Kristof Meding, Luca M Schulze Buschoff, Robert Geirhos, and Felix A Wichmann. Trivial or impossible–dichotomous data difficulty masks model differences (on ImageNet and beyond). In *International Conference on Learning Representations*, 2021.

- [256] Johannes Mehrer, Courtney J Spoerer, Nikolaus Kriegeskorte, and Tim C Kietzmann. Individual differences among deep neural network models. *Nature communications*, 11(1):5725, 2020.
- [257] Kevin Meng, David Bau, Alex Andonian, and Yonatan Belinkov. Locating and editing factual associations in gpt. *Advances in Neural Information Processing Systems*, 35:17359–17372, 2022.
- [258] Gabriele Merlin and Mariya Toneva. Language models and brain alignment: beyond word-level semantics and prediction. *arXiv preprint arXiv:2212.00596*, 2022.
- [259] Meir Meshulam, Liat Hasenfratz, Hanna Hillman, Yun-Fei Liu, Mai Nguyen, Kenneth A Norman, and Uri Hasson. Neural alignment predicts learning outcomes in students taking an introduction to computer science course. *Nature communications*, 12(1):1922, 2021.
- [260] Nicholas Metropolis, Arianna W Rosenbluth, Marshall N Rosenbluth, Augusta H Teller, and Edward Teller. Equation of state calculations by fast computing machines. *The Journal of Chemical Physics*, 21(6):1087–1092, 1953.
- [261] Tomas Mikolov, Ilya Sutskever, Kai Chen, Greg S Corrado, and Jeff Dean. Distributed representations of words and phrases and their compositionality. *Advances in Neural Information Processing Systems*, 26, 2013a.
- [262] Tomas Mikolov, Ilya Sutskever, Kai Chen, Greg S Corrado, and Jeff Dean. Distributed representations of words and phrases and their compositionality. In C.J. Burges, L. Bottou, M. Welling, Z. Ghahramani, and K.Q. Weinberger, editors, *Advances in Neural Information Processing Systems*, volume 26. Curran Associates, Inc., 2013b.
- [263] Kevin Miller and Rochel Gelman. The child’s representation of number: A multidimensional scaling analysis. *Child development*, pages 1470–1479, 1983.
- [264] Patricia H Miller. *Theories of developmental psychology*. Macmillan, 2002.
- [265] Gosse Minnema and Aurélie Herbelot. From brain space to distributional space: The perilous journeys of fMRI decoding. In Fernando Alva-Manchego, Eunsol Choi, and Daniel Khashabi, editors, *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics: Student Research Workshop*, pages 155–161, Florence, Italy, July 2019. Association for Computational Linguistics. doi:10.18653/v1/P19-2021. URL <https://aclanthology.org/P19-2021>.
- [266] Mazda Moayeri, Keivan Rezaei, Maziar Sanjabi, and Soheil Feizi. Text-to-concept (and back) via cross-model alignment. *arXiv preprint arXiv:2305.06386*, 2023.
- [267] Milton L Montero, Jeffrey S Bowers, Rui Ponte Costa, Casimir JH Ludwig, and Gaurav Malhotra. Lost in latent space: Disentangled models and the challenge of combinatorial generalisation. *arXiv preprint arXiv:2204.02283*, 2022.
- [268] Ari Morcos, Maithra Raghu, and Samy Bengio. Insights on representational similarity in neural networks with canonical correlation. *Advances in Neural Information Processing Systems*, 31, 2018.
- [269] Yasuhide Mori, Hironobu Takahashi, and Ryuichi Oka. Automatic word assignment to images based on image division and vector quantization. page 285–293, 2000.
- [270] Luca Moschella, Valentino Maiorca, Marco Fumero, Antonio Norelli, Francesco Locatello, and Emanuele Rodolà. Relative representations enable zero-shot latent space communication. In *The Eleventh International Conference on Learning Representations*, 2023.
- [271] Kushin Mukherjee, Siddharth Suresh, Xizheng Yu, and Gary Lupyan. The role of shared labels and experiences in representational alignment. In *ICLR 2024 Workshop on Representational Alignment*, 2024.
- [272] Rafael Müller, Simon Kornblith, and Geoffrey E Hinton. When does label smoothing help? In H. Wallach, H. Larochelle, A. Beygelzimer, F. d’Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 32, 2019.
- [273] Marieke Mur, Mirjam Meys, Jerzy Bodurka, Rainer Goebel, Peter A Bandettini, and Nikolaus Kriegeskorte. Human object-similarity judgments reflect and transcend the primate-it object representation. *Frontiers in psychology*, 4:128, 2013.
- [274] Alex Graeme Murphy, Joel Zylberberg, and Alona Fyshe. Correcting biased centered kernel alignment measures in biological and artificial neural networks. In *ICLR 2024 Workshop on Representational Alignment*, 2024. URL <https://openreview.net/forum?id=E1NRrGtIHG>.
- [275] Lukas Muttenthaler, Charles Y Zheng, Patrick McClure, Robert A Vandermeulen, Martin N Hebart, and Francisco Pereira. Vice: Variational interpretable concept embeddings. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh, editors, *Advances in Neural Information Processing Systems*, volume 35, pages 33661–33675. Curran Associates, Inc., 2022.

- [276] Lukas Muttenthaler, Jonas Dippel, Lorenz Linhardt, Robert A. Vandermeulen, and Simon Kornblith. Human alignment of neural network representations. In *The Eleventh International Conference on Learning Representations*, 2023a.
- [277] Lukas Muttenthaler, Lorenz Linhardt, Jonas Dippel, Robert A Vandermeulen, Katherine Hermann, Andrew Lampinen, and Simon Kornblith. Improving neural network representations using human similarity judgments. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, editors, *Advances in Neural Information Processing Systems*, volume 36, pages 50978–51007. Curran Associates, Inc., 2023b.
- [278] Lukas Muttenthaler, Klaus Greff, Frieda Born, Bernhard Spitzer, Simon Kornblith, Michael C Mozer, Klaus-Robert Müller, Thomas Unterthiner, and Andrew K Lampinen. Aligning machine and human visual representations across abstraction levels. *arXiv preprint arXiv:2409.06509*, 2024a.
- [279] Lukas Muttenthaler, Robert A. Vandermeulen, Qiuyi Zhang, Thomas Unterthiner, and Klaus-Robert Müller. Set learning for accurate and calibrated models. In *The Twelfth International Conference on Learning Representations*, 2024b. URL <https://openreview.net/forum?id=HZ3S17EI0o>.
- [280] Neel Nanda, Lawrence Chan, Tom Liberum, Jess Smith, and Jacob Steinhardt. Progress measures for grokking via mechanistic interpretability. *arXiv preprint arXiv:2301.05217*, 2023.
- [281] Vedant Nanda, Till Speicher, Camila Kolling, John P Dickerson, Krishna Gummadi, and Adrian Weller. Measuring representational robustness of neural networks through shared invariances. In *International Conference on Machine Learning*, pages 16368–16382, 2022.
- [282] Karli Nave, Chantal Carrillo, Nori Jacoby, Laurel Trainor, and Erin Hannon. The development of rhythmic categories as revealed through an iterative production task. *Cognition*, 242:105634, 2024. ISSN 0010-0277.
- [283] Aran Nayebi, Daniel Bear, Jonas Kubilius, Kohitij Kar, Surya Ganguli, David Sussillo, James J DiCarlo, and Daniel L Yamins. Task-driven convolutional recurrent models of the visual system. *Advances in Neural Information Processing Systems*, 31, 2018.
- [284] Mai Nguyen, Ashley Chang, Emily Micciche, Meir Meshulam, Samuel A Nastase, and Uri Hasson. Teacher-student neural coupling during teaching and learning. *Social Cognitive and Affective Neuroscience*, 17(4): 367–376, 2022.
- [285] Mitja Nikolaus, Milad Mozafari, Nicholas Asher, Leila Reddy, and Rufin VanRullen. Modality-agnostic fmri decoding of vision and language. In *ICLR 2024 Workshop on Representational Alignment*, 2024.
- [286] Hamed Nili, Cai Wingfield, Alexander Walther, Li Su, William Marslen-Wilson, and Nikolaus Kriegeskorte. A toolbox for representational similarity analysis. *PLoS computational biology*, 10(4):e1003553, 2014.
- [287] Antonio Norelli, Marco Fumero, Valentino Maiorca, Luca Moschella, Emanuele Rodola, and Francesco Locatello. Asif: Coupled data turns unimodal models to multimodal without training. *arXiv preprint arXiv:2210.01738*, 2022.
- [288] Thomas P O’Connell, Tyler Bonnen, Yoni Friedman, Ayush Tewari, Josh B Tenenbaum, Vincent Sitzmann, and Nancy Kanwisher. Approaching human 3d shape perception with neurally mappable models. *arXiv preprint arXiv:2308.11300*, 2023.
- [289] Kerem Oktar, Ilia Sucholutsky, Tania Lombrozo, and Thomas Griffiths. Dimensions of disagreement: Unpacking divergence and misalignment in cognitive science and artificial intelligence. *arXiv preprint arXiv:2310.12994*, 2023.
- [290] Chris Olah, Arvind Satyanarayan, Ian Johnson, Shan Carter, Ludwig Schubert, Katherine Ye, and Alexander Mordvintsev. The building blocks of interpretability. *Distill*, 3(3):e10, 2018.
- [291] Chris Olah, Nick Cammarata, Ludwig Schubert, Gabriel Goh, Michael Petrov, and Shan Carter. Zoom in: An introduction to circuits. *Distill*, 5(3), March 2020.
- [292] Bence P Ölveczky, Stephen A Baccus, and Markus Meister. Segregation of object and background motion in the retina. *Nature*, 423(6938):401–408, 2003.
- [293] Subba Reddy Oota, Jashn Arora, Veeral Agarwal, Mounika Marreddy, Manish Gupta, and Bapi Raju Surampudi. Neural language taskonomy: Which nlp tasks are the most predictive of fmri brain activity? *arXiv preprint arXiv:2205.01404*, 2022.
- [294] Subba Reddy Oota, Manish Gupta, and Mariya Toneva. Joint processing of linguistic properties in brains and language models. *Advances in Neural Information Processing Systems*, 2023.
- [295] Gustaw Opielka, Jessica Loke, and H Steven Scholte. Saliency suppressed, semantics surfaced: Visual transformations in neural networks and the brain. In *ICLR 2024 Workshop on Representational Alignment*, 2024.

- [296] Maxime Oquab, Timothée Darcet, Théo Moutakanni, Huy V. Vo, Marc Szafraniec, Vasil Khalidov, Pierre Fernandez, Daniel HAZIZA, Francisco Massa, Alaaeldin El-Nouby, Mido Assran, Nicolas Ballas, Wojciech Galuba, Russell Howes, Po-Yao Huang, Shang-Wen Li, Ishan Misra, Michael Rabbat, Vasu Sharma, Gabriel Synnaeve, Hu Xu, Herve Jegou, Julien Mairal, Patrick Labatut, Armand Joulin, and Piotr Bojanowski. DINOv2: Learning robust visual features without supervision. *Transactions on Machine Learning Research*, 2024. ISSN 2835-8856. URL <https://openreview.net/forum?id=a68SUt6zFt>.
- [297] Mitchell Ostrow, Adam Eisen, Leo Kozachkov, and Ila Fiete. Beyond geometry: Comparing the temporal structure of computation in neural circuits with dynamical similarity analysis. *Advances in Neural Information Processing Systems*, 36, 2024.
- [298] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in Neural Information Processing Systems*, 35:27730–27744, 2022.
- [299] Thomas P O’Connell and Marvin M Chun. Predicting eye movement patterns from fmri responses to natural scenes. *Nature Communications*, 9(5159), 2018.
- [300] David M O’Shaughnessy, Tania Cruz Cordero, Francis Mollica, Isabelle Boni, Julian Jara-Ettinger, Edward Gibson, and Steven T Piantadosi. Diverse mathematical knowledge among indigenous amazonians. *Proceedings of the National Academy of Sciences*, 120(35):e2215999120, 2023.
- [301] Tianyu Pang, Kun Xu, Chao Du, Ning Chen, and Jun Zhu. Improving adversarial robustness via promoting ensemble diversity. In *International Conference on Machine Learning*, pages 4970–4979, 2019.
- [302] Wonpyo Park, Dongju Kim, Yan Lu, and Minsu Cho. Relational knowledge distillation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2019.
- [303] Andi Peng, Ilya Sucholutsky, Belinda Li, Theodore Sumers, Thomas Griffiths, Jacob Andreas, and Julie Shah. Learning with language-guided state abstractions. In *RSS Workshop on Social Intelligence in Humans and Robots*, 2023.
- [304] Jeffrey Pennington, Richard Socher, and Christopher D Manning. Glove: Global vectors for word representation. In *Proceedings of the 2014 conference on empirical methods in natural language processing (EMNLP)*, pages 1532–1543, 2014.
- [305] Joshua C Peterson, Joshua T Abbott, and Thomas L Griffiths. Evaluating (and improving) the correspondence between deep neural networks and human representations. *Cognitive Science*, 42(8):2648–2669, 2018.
- [306] Joshua C. Peterson, Ruairidh M. Battleday, Thomas L. Griffiths, and Olga Russakovsky. Human uncertainty makes classification more robust. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, October 2019.
- [307] Mary Phuong and Christoph Lampert. Towards understanding knowledge distillation. In Kamalika Chaudhuri and Ruslan Salakhutdinov, editors, *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pages 5142–5151. PMLR, 09–15 Jun 2019.
- [308] Jean Piaget. *The Child’s Conception of the World*. Paladin, 1973.
- [309] Elise A Piazza, Liat Hasenfratz, Uri Hasson, and Casey Lew-Williams. Infant and adult brains are coupled to the dynamics of natural communication. *Psychological Science*, 31(1):6–17, 2020.
- [310] Gorana Pobric, Elizabeth Jefferies, and Matthew A Lambon Ralph. Amodal semantic representations depend on both anterior temporal lobes: evidence from repetitive transcranial magnetic stimulation. *Neuropsychologia*, 48(5):1336–1342, 2010.
- [311] Galen Pogoncheff, Jacob Granley, Alfonso Rodil, Leili Soo, Lily Marie Turkstra, Lucas Gil Nadolskis, Arantxa Alfaro Saez, Cristina Soto Sanchez, Eduardo Fernandez Jover, and Michael Beyeler. Beyond sight: Probing alignment between image models and blind v1. In *ICLR 2024 Workshop on Representational Alignment*, 2024.
- [312] Russell A Poldrack. The physics of representation. *Synthese*, 199(1-2):1307–1325, 2021.
- [313] Dean A Pospisil, Brett W Larsen, Sarah E Harvey, and Alex H Williams. Estimating shape distances on neural representations with limited samples. In *The Twelfth International Conference on Learning Representations*, 2024.
- [314] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision. In Marina Meila and Tong Zhang, editors, *Proceedings of the 38th International Conference on Machine Learning*, volume 139 of *Proceedings of Machine Learning Research*, pages 8748–8763. PMLR, 18–24 Jul 2021.

- [315] Maithra Raghu, Justin Gilmer, Jason Yosinski, and Jascha Sohl-Dickstein. Svcca: Singular vector canonical correlation analysis for deep learning dynamics and interpretability. *Advances in Neural Information Processing Systems*, 30, 2017.
- [316] Rouhollah Rahmatizadeh, Pooya Abolghasemi, Ladislau Bölöni, and Sergey Levine. Vision-based multi-task manipulation for inexpensive robots using end-to-end learning from demonstration. In *2018 IEEE International Conference on Robotics and Automation, ICRA 2018, Brisbane, Australia, May 21-25, 2018*, pages 3758–3765. IEEE, 2018. doi:10.1109/ICRA.2018.8461076. URL <https://doi.org/10.1109/ICRA.2018.8461076>.
- [317] Rishi Rajalingham, Elias B Issa, Pouya Bashivan, Kohitij Kar, Kailyn Schmidt, and James J DiCarlo. Large-scale, high-resolution comparison of the core visual object recognition behavior of humans, monkeys, and state-of-the-art deep artificial neural networks. *Journal of Neuroscience*, 38(33):7255–7269, 2018.
- [318] Aravind Rajeswaran, Vikash Kumar, Abhishek Gupta, Giulia Vezzani, John Schulman, Emanuel Todorov, and Sergey Levine. Learning complex dexterous manipulation with deep reinforcement learning and demonstrations. In Hadas Kress-Gazit, Siddhartha S. Srinivasa, Tom Howard, and Nikolay Atanasov, editors, *Robotics: Science and Systems XIV, Carnegie Mellon University, Pittsburgh, Pennsylvania, USA, June 26-30, 2018*, 2018. doi:10.15607/RSS.2018.XIV.049. URL <http://www.roboticsproceedings.org/rss14/p49.html>.
- [319] Matthew A Lambon Ralph, Elizabeth Jefferies, Karalyn Patterson, and Timothy T Rogers. The neural and computational bases of semantic cognition. *Nature reviews neuroscience*, 18(1):42–55, 2017.
- [320] Aditya Ramesh, Mikhail Pavlov, Gabriel Goh, Scott Gray, Chelsea Voss, Alec Radford, Mark Chen, and Ilya Sutskever. Zero-shot text-to-image generation. In *International Conference on Machine Learning*, pages 8821–8831. PMLR, 2021.
- [321] Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. Hierarchical text-conditional image generation with clip latents. *arXiv preprint arXiv:2204.06125*, 2022.
- [322] Sunayana Rane, Polyphony Bruna, Ilija Sucholutsky, Christopher Kello, and Thomas Griffiths. Concept alignment. *1st NeurIPS Workshop on AI meets Moral Philosophy and Moral Psychology (MP2)*, 2023a.
- [323] Sunayana Rane, Mark Ho, Ilija Sucholutsky, and Thomas L Griffiths. Concept alignment as a prerequisite for value alignment. *arXiv preprint arXiv:2310.20059*, 2023b.
- [324] Sunayana Rane, Mira L Nencheva, Zeyu Wang, Casey Lew-Williams, Olga Russakovsky, and Thomas L Griffiths. Predicting word learning in children from the performance of computer vision systems. In *Proceedings of the Annual Meeting of the Cognitive Science Society*, volume 45, 2023c.
- [325] J Brendan Ritchie, David Michael Kaplan, and Colin Klein. Decoding the brain: Neural representation and the limits of multivariate pattern analysis in cognitive neuroscience. *The British Journal for the Philosophy of Science*, 2019.
- [326] Brett D Roads and Bradley C Love. Learning as the unsupervised alignment of conceptual systems. *Nature Machine Intelligence*, 2(1):76–82, 2020.
- [327] Brett D. Roads and Bradley C. Love. Enriching imagenet with human similarity judgments and psychological embeddings. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 3547–3557, 2021.
- [328] Brett D. Roads and Bradley C. Love. Modeling similarity and psychological space. *Annual Review of Psychology*, 75, 2024.
- [329] Timothy T Rogers and James L McClelland. *Semantic cognition: A parallel distributed processing approach*. MIT press, 2004.
- [330] Karsten Roth, Lukas Thede, A. Sophia Koepke, Oriol Vinyals, Olivier J Henaff, and Zeynep Akata. Fantastic gains and where to find them: On the existence and prospect of general knowledge transfer between any pretrained model. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=m50eKHcttz>.
- [331] Michael E Rule, Timothy O’Leary, and Christopher D Harvey. Causes and consequences of representational drift. *Current opinion in neurobiology*, 58:141–147, 2019.
- [332] Nicole C Rust and J Anthony Movshon. In praise of artifice. *Nature neuroscience*, 8(12):1647–1650, 2005.
- [333] Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily L. Denton, Seyed Kamyar Seyed Ghasemipour, Raphael Gontijo Lopes, Burcu Karagol Ayan, Tim Salimans, Jonathan Ho, David J. Fleet, and Mohammad Norouzi. Photorealistic text-to-image diffusion models with deep language understanding. *Advances in Neural Information Processing Systems*, 2022.

- [334] Wojciech Samek, Alexander Binder, Grégoire Montavon, Sebastian Lapuschkin, and Klaus-Robert Müller. Evaluating the visualization of what a deep neural network has learned. *IEEE Transactions on Neural Networks and Learning Systems*, 28(11):2660–2673, 2017a. doi:10.1109/TNNLS.2016.2599820.
- [335] Wojciech Samek, Alexander Binder, Grégoire Montavon, Sebastian Lapuschkin, and Klaus-Robert Müller. Evaluating the visualization of what a deep neural network has learned. *IEEE Transactions on Neural Networks and Learning Systems*, 28(11):2660–2673, 2017b. doi:10.1109/TNNLS.2016.2599820.
- [336] Wojciech Samek, Grégoire Montavon, Andrea Vedaldi, Lars Kai Hansen, and Klaus-Robert Müller. *Explainable AI: interpreting, explaining and visualizing deep learning*, volume 11700. Springer Nature, 2019.
- [337] Adam Sanborn and Thomas Griffiths. Markov chain Monte Carlo with people. *Advances in Neural Information Processing Systems*, 20, 2007.
- [338] Adam N Sanborn, Thomas L Griffiths, and Richard M Shiffrin. Uncovering mental representations with markov chain monte carlo. *Cognitive Psychology*, 60(2):63–106, 2010.
- [339] Edward Sapir. *Selected Writings of Edward Sapir*. University of California Press, 1968.
- [340] Andrew M Saxe, James L McClelland, and Surya Ganguli. A mathematical theory of semantic development in deep neural networks. *Proceedings of the National Academy of Sciences*, 116(23):11537–11546, 2019.
- [341] Steffen Schneider, Jin Hwa Lee, and Mackenzie Weygandt Mathis. Learnable latent embeddings for joint behavioural and neural analysis. *Nature*, May 2023. ISSN 1476-4687. doi:10.1038/s41586-023-06031-6. URL <https://doi.org/10.1038/s41586-023-06031-6>.
- [342] Martin Schrimpf, Jonas Kubilius, Ha Hong, Najib J Majaj, Rishi Rajalingham, Elias B Issa, Kohitij Kar, Pouya Bashivan, Jonathan Prescott-Roy, Franziska Geiger, et al. Brain-score: Which artificial neural network for object recognition is most brain-like? *BioRxiv*, page 407007, 2018.
- [343] Martin Schrimpf, Idan Asher Blank, Greta Tuckute, Carina Kauf, Eghbal A Hosseini, Nancy Kanwisher, Joshua B Tenenbaum, and Evelina Fedorenko. The neural architecture of language: Integrative modeling converges on predictive processing. *Proceedings of the National Academy of Sciences*, 118(45), 2021.
- [344] Heiko H Schütt, Alexander D Kipnis, Jörn Diedrichsen, and Nikolaus Kriegeskorte. Statistical inference on representational geometries. *Elife*, 12:e82566, 2023.
- [345] Dan Schwartz, Mariya Toneva, and Leila Wehbe. Inducing brain-relevant bias in natural language processing models. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 32, 2019.
- [346] K. Seeliger, L. Ambrogioni, Y. Güçlütürk, L. M. van den Bulk, U. Güçlü, and M. A. J. van Gerven. End-to-end neural system identification with neural information flow. *PLOS Computational Biology*, 17(2):1–22, 02 2021. doi:10.1371/journal.pcbi.1008558. URL <https://doi.org/10.1371/journal.pcbi.1008558>.
- [347] Katja Seeliger, Matthias Fritsche, Umut Güçlü, Sanne Schoenmakers, J-M Schoffelen, Sander E Bosch, and MAJ Van Gerven. Convolutional neural network-based encoding and decoding of visual object recognition in space and time. *NeuroImage*, 180:253–266, 2018.
- [348] Thomas Serre. Deep learning: the good, the bad, and the ugly. *Annual Review of Vision Science*, 5:399–426, 2019.
- [349] Nicholas J Sexton and Bradley C Love. Reassessing hierarchical correspondences between brain and deep networks through direct interface. *Science Advances*, 8(28):eabm2219, 2022.
- [350] Guohua Shen, Tomoyasu Horikawa, Kei Majima, and Yukiyasu Kamitani. Deep image reconstruction from human brain activity. *PLoS computational biology*, 15(1):e1006633, 2019.
- [351] Roger N Shepard. The analysis of proximities: multidimensional scaling with an unknown distance function. i. *Psychometrika*, 27(2):125–140, 1962.
- [352] Roger N Shepard. Multidimensional scaling, tree-fitting, and clustering. *Science*, 210(4468):390–398, 1980.
- [353] Roger N Shepard and Phipps Arabie. Additive clustering: Representation of similarities as combinations of discrete overlapping properties. *Psychological Review*, 86(2):87, 1979.
- [354] Roger N Shepard and Susan Chipman. Second-order isomorphism of internal representations: Shapes of states. *Cognitive psychology*, 1(1):1–17, 1970.
- [355] Lauren J Silbert, Christopher J Honey, Erez Simony, David Poeppel, and Uri Hasson. Coupled neural systems underlie the production and comprehension of naturalistic narrative speech. *Proceedings of the National Academy of Sciences*, 111(43):E4687–E4696, 2014.

- [356] Johannes JD Singer, Katja Seeliger, Tim C Kietzmann, and Martin N Hebart. From photos to sketches-how humans and deep neural networks process objects across different levels of visual abstraction. *Journal of vision*, 22(2):4–4, 2022.
- [357] Kihyuk Sohn. Improved deep metric learning with multi-class n-pair loss objective. *Advances in Neural Information Processing Systems (NIPS)*, 2016.
- [358] Le Song, Alex Smola, Arthur Gretton, Karsten Borgwardt, and Justin Bedo. Supervised feature selection via dependence estimation, 2007.
- [359] Ghislain St-Yves, Emily J Allen, Yihan Wu, Kendrick Kay, and Thomas Naselaris. Brain-optimized deep neural network models of human visual areas learn non-hierarchical representations. *Nature communications*, 14(1): 3329, 2023.
- [360] Greg J Stephens, Lauren J Silbert, and Uri Hasson. Speaker–listener neural coupling underlies successful communication. *Proceedings of the National Academy of Sciences*, 107(32):14425–14430, 2010.
- [361] Arjen Stolk, Lennart Verhagen, and Ivan Toni. Conceptual alignment: How brains achieve mutual understanding. *Trends in cognitive sciences*, 20(3):180–191, 2016.
- [362] Katherine R Storrs, Barton L Anderson, and Roland W Fleming. Unsupervised learning predicts human perception and misperception of gloss. *Nature Human Behaviour*, 5(10):1402–1417, 2021a.
- [363] Katherine R Storrs, Tim C Kietzmann, Alexander Walther, Johannes Mehrer, and Nikolaus Kriegeskorte. Diverse deep neural networks all predict human inferior temporal cortex well, after training and fitting. *Journal of cognitive neuroscience*, 33(10):2044–2064, 09 2021b. doi:10.1162/jocn_a_01755.
- [364] Ilia Sucholutsky and Thomas L Griffiths. Alignment with human representations supports robust few-shot learning. *arXiv preprint arXiv:2301.11990*, 2023.
- [365] Ilia Sucholutsky and Matthias Schonlau. Soft-label dataset distillation and text dataset distillation. In *2021 International Joint Conference on Neural Networks (IJCNN)*, pages 1–8. IEEE, 2021.
- [366] Ilia Sucholutsky, Ruairidh M Battleday, Katherine M Collins, Raja Marjeh, Joshua Peterson, Pulkit Singh, Umang Bhatt, Nori Jacoby, Adrian Weller, and Thomas L Griffiths. On the informativeness of supervision signals. In *Uncertainty in Artificial Intelligence*, pages 2036–2046, 2023.
- [367] Gustavo Sudre, Dean Pomerleau, Mark Palatucci, Leila Wehbe, Alona Fyshe, Riitta Salmelin, and Tom Mitchell. Tracking neural coding of perceptual and semantic features of concrete nouns. *NeuroImage*, 62(1):451–463, 2012.
- [368] Shobhita Sundaram, Stephanie Fu, Lukas Muttenthaler, Netanel Yakir Tamir, Lucy Chai, Simon Kornblith, Trevor Darrell, and Phillip Isola. When does perceptual alignment benefit vision representations? In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024. URL <https://openreview.net/forum?id=Nm1nmLYMz4>.
- [369] Siddharth Suresh, Kushin Mukherjee, Xizheng Yu, Wei-Chun Huang, Lisa Padua, and Timothy Rogers. Conceptual structure coheres in human cognition but not in large language models. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 722–738, 2023.
- [370] Siddharth Suresh, Wei-Chun Huang, Kushin Mukherjee, and Timothy T Rogers. Categories vs semantic features: What shape the similarities people discern in photographs of objects? In *ICLR 2024 Workshop on Representational Alignment*, 2024.
- [371] Soh Takahashi, Masaru Sasaki, Ken Takeda, and Masafumi Oizumi. Self-supervised learning facilitates neural representation structures that can be unsupervisedly aligned to human behaviors. In *ICLR 2024 Workshop on Representational Alignment*, 2024.
- [372] Ken Takeda, Kota Abe, Jun Kitazono, and Masafumi Oizumi. Unsupervised alignment reveals structural commonalities and differences in neural representations of natural scenes across individuals and brain areas. In *ICLR 2024 Workshop on Representational Alignment*, 2024.
- [373] Farzaneh Taleb, Miguel Serras Vasco, Nona Rajabi, Mårten Björkman, and Danica Kragic. Do foundation models smell like humans? In *ICLR 2024 Workshop on Representational Alignment*, 2024.
- [374] Priya Tarigopula, Scott Laurence Fairhall, Anna Bavaresco, Nhut Truong, and Uri Hasson. Improved prediction of behavioral and neural similarity spaces using pruned dnns. *Neural Networks*, 168:89–104, 2023.
- [375] Jessica Taylor, Eliezer Yudkowsky, Patrick LaVictoire, and Andrew Critch. Alignment for advanced machine learning systems. *Ethics of Artificial Intelligence*, pages 342–382, 2016.
- [376] Joshua Tenenbaum. Learning the structure of similarity. *Advances in Neural Information Processing Systems*, 8, 1995.

- [377] Bill Thompson, Seán G Roberts, and Gary Lupyan. Cultural influences on word meanings revealed through large-scale semantic alignment. *Nature Human Behaviour*, 4(10):1029–1038, 2020.
- [378] Yonglong Tian, Dilip Krishnan, and Phillip Isola. Contrastive representation distillation. *arXiv preprint arXiv:1910.10699*, 2019.
- [379] Mariya Toneva. *Bridging Language in Machines with Language in the Brain*. PhD thesis, Carnegie Mellon University, 2021.
- [380] Mariya Toneva and Leila Wehbe. Interpreting and improving natural-language processing (in machines) with natural language-processing (in the brain). In H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 32, 2019.
- [381] Mariya Toneva, Otilia Stretcu, Barnabás Póczos, Leila Wehbe, and Tom M Mitchell. Modeling task effects on meaning representation in the brain via zero-shot meg prediction. *Advances in Neural Information Processing Systems*, 33:5284–5295, 2020.
- [382] Faraz Torabi, Garrett Warnell, and Peter Stone. Behavioral cloning from observation. In *Proceedings of the 27th International Joint Conference on Artificial Intelligence*, page 4950–4957, 2018. ISBN 9780999241127.
- [383] Nhut Truong, Dario Pesenti, and Uri Hasson. Explaining human comparisons using alignment-importance heatmaps. In *Proceedings of the Annual Meeting of the Cognitive Science Society*, volume 46, 2024.
- [384] Mycal Tucker and Greta Tuckute. Increasing brain-llm alignment via information-theoretic compression. In *UniReps: the First Workshop on Unifying Representations in Neural Models*, 2023.
- [385] Mycal Tucker, Yilun Zhou, and Julie A Shah. Latent space alignment using adversarially guided self-play. *International Journal of Human–Computer Interaction*, 38(18-20):1753–1771, 2022.
- [386] Greta Tuckute, Aalok Sathe, Shashank Srikant, Maya Taliaferro, Mingye Wang, Martin Schrimpf, Kendrick Kay, and Evelina Fedorenko. Driving and suppressing the human language network using large language models. *BioRxiv*, pages 2023–04, 2023.
- [387] Frederick Tung and Greg Mori. Similarity-preserving knowledge distillation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, October 2019.
- [388] Elliot Turiel. The development of morality. *Child and adolescent development: An advanced course*, pages 473–514, 2008.
- [389] Brandon M. Turner, Birte U. Forstmann, Bradley C. Love, Thomas J. Palmeri, and Leendert Van Maanen. Approaches to analysis in model-based cognitive neuroscience. *Journal of Mathematical Psychology*, 76:65–79, 2017. ISSN 0022-2496. doi:<https://doi.org/10.1016/j.jmp.2016.01.001>. URL <https://www.sciencedirect.com/science/article/pii/S0022249616000031>. Model-based Cognitive Neuroscience.
- [390] Amos Tversky. Features of similarity. *Psychological Review*, 84(4):327, 1977.
- [391] Aäron van den Oord, Yazhe Li, and Oriol Vinyals. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748*, 2018.
- [392] Pol Van Rijn, Silvan Mertes, Dominik Schiller, Peter Harrison, Pauline Larrouy-Maestri, Elisabeth André, and Nori Jacoby. Exploring emotional prototypes in a high dimensional tts latent space. *arXiv preprint arXiv:2105.01891*, 2021.
- [393] Pol van Rijn, Silvan Mertes, Dominik Schiller, Piotr Dura, Hubert Siuzdak, Peter Harrison, Elisabeth André, and Nori Jacoby. Voiceme: Personalized voice generation in tts. *arXiv preprint arXiv:2203.15379*, 2022.
- [394] Aria Wang, Michael Tarr, and Leila Wehbe. Neural taskonomy: Inferring the similarity of task-derived representations from brain activity. *Advances in Neural Information Processing Systems*, 32, 2019.
- [395] Aria Y Wang, Kendrick Kay, Thomas Naselaris, Michael J Tarr, and Leila Wehbe. Better models of human high-level visual cortex emerge from natural language supervision with a large and diverse dataset. *Nature Machine Intelligence*, 5(12):1415–1426, 2023.
- [396] Leila Wehbe, Brian Murphy, Partha Talukdar, Alona Fyshe, Aaditya Ramdas, and Tom Mitchell. Simultaneously uncovering the patterns of brain regions involved in different story reading subprocesses. *PLOS ONE*, 9(11):1–19, 11 2014a. doi:10.1371/journal.pone.0112575. URL <https://doi.org/10.1371/journal.pone.0112575>.
- [397] Leila Wehbe, Ashish Vaswani, Kevin Knight, and Tom Mitchell. Aligning context-based statistical models of language with brain activity during reading. In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 233–243, 2014b.
- [398] Vivian White, Muawiz Sajjad Chaudhary, Guy Wolf, Guillaume Lajoie, and Kameron Decker Harris. Learning and aligning structured random feature networks. In *ICLR 2024 Workshop on Representational Alignment*, 2024.

- [399] Benjamin Lee Whorf. *Language, thought, and reality: Selected writings of Benjamin Lee Whorf*. MIT press, 2012.
- [400] Felix A Wichmann and Robert Geirhos. Are deep neural networks adequate behavioral models of human visual perception? *Annual Review of Vision Science*, 9, 2023.
- [401] Ethan G Wilcox. On the predictive power of neural language models for human real-time comprehension behavior. *arXiv preprint arXiv:2006.01912*, 2020.
- [402] Alex H Williams, Erin Kunz, Simon Kornblith, and Scott Linderman. Generalized shape metrics on neural representations. *Advances in Neural Information Processing Systems*, 34:4738–4750, 2021.
- [403] Myron Wish and J Douglas Carroll. Applications of individual differences scaling to studies of human perception and judgment. In Edward C. Carterette and Morton P. Friedman, editors, *Handbook of perception*, volume 2, pages 449–491. Academic Press, 1974.
- [404] Yanzhao Wu, Ling Liu, Zhongwei Xie, Ka-Ho Chow, and Wenqi Wei. Boosting ensemble accuracy by revisiting ensemble diversity metrics. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16469–16477, 2021.
- [405] Zeqiu Wu, Yushi Hu, Weijia Shi, Nouha Dziri, Alane Suhr, Prithviraj Ammanabrolu, Noah A Smith, Mari Ostendorf, and Hannaneh Hajishirzi. Fine-grained human feedback gives better rewards for language model training. *Advances in Neural Information Processing Systems*, 36:59008–59033, 2023.
- [406] Sally Y Xie, Jessica K Flake, Ryan M Stolier, Jonathan B Freeman, and Eric Hehman. Facial impressions are predicted by the structure of group stereotypes. *Psychological Science*, 32(12):1979–1993, 2021.
- [407] Jing Xu and Thomas L Griffiths. A rational analysis of the effects of memory biases on serial reproduction. *Cognitive Psychology*, 60(2):107–126, 2010.
- [408] Kelvin Xu, Jimmy Ba, Ryan Kiros, Kyunghyun Cho, Aaron Courville, Ruslan Salakhudinov, Rich Zemel, and Yoshua Bengio. Show, attend and tell: Neural image caption generation with visual attention. In Francis Bach and David Blei, editors, *Proceedings of the 32nd International Conference on Machine Learning*, pages 2048–2057, 2015.
- [409] Kelvin Xu, Ellis Ratner, Anca Dragan, Sergey Levine, and Chelsea Finn. Learning a prior over intent via meta-inverse reinforcement learning. In Kamalika Chaudhuri and Ruslan Salakhudinov, editors, *Proceedings of the 36th International Conference on Machine Learning*, pages 6952–6962, 2019.
- [410] Yaoda Xu and Maryam Vaziri-Pashkam. Limits to visual representational correspondence between convolutional neural networks and the human brain. *Nature communications*, 12(1):2065, 2021.
- [411] Daniel LK Yamins and James J DiCarlo. Using goal-driven deep learning models to understand sensory cortex. *Nature Neuroscience*, 19(3):356–365, 2016.
- [412] Daniel LK Yamins, Ha Hong, Charles F Cadieu, Ethan A Solomon, Darren Seibert, and James J DiCarlo. Performance-optimized hierarchical models predict neural responses in higher visual cortex. *Proceedings of the National Academy of Sciences*, 111(23):8619–8624, 2014.
- [413] Chih-Kuan Yeh, Been Kim, Sercan Arik, Chun-Liang Li, Tomas Pfister, and Pradeep Ravikumar. On completeness-aware concept-based explanations in deep neural networks. *Advances in Neural Information Processing Systems*, 33:20554–20565, 2020.
- [414] Jiahui Yu, Yuanzhong Xu, Jing Yu Koh, Thang Luong, Gunjan Baid, Zirui Wang, Vijay Vasudevan, Alexander Ku, Yinfei Yang, Burcu Karagol Ayan, Ben Hutchinson, Wei Han, Zarana Parekh, Xin Li, Han Zhang, Jason Baldridge, and Yonghui Wu. Scaling autoregressive models for content-rich text-to-image generation. *Transactions on Machine Learning Research*, 2022.
- [415] Mateo Espinosa Zarlenga, Pietro Barbiero, Gabriele Ciravegna, Giuseppe Marra, Francesco Giannini, Michelangelo Diligenti, Frederic Precioso, Stefano Melacci, Adrian Weller, Pietro Lio, et al. Concept embedding models. In *Conference on Neural Information Processing Systems*, 2022.
- [416] Xiaohua Zhai, Basil Mustafa, Alexander Kolesnikov, and Lucas Beyer. Sigmoid loss for language image pre-training. *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, 2023.
- [417] Tianhao Zhang, Zoe McCarthy, Owen Jow, Dennis Lee, Xi Chen, Ken Goldberg, and Pieter Abbeel. Deep imitation learning for complex manipulation tasks from virtual reality teleoperation. In *2018 IEEE International Conference on Robotics and Automation, ICRA 2018, Brisbane, Australia, May 21-25, 2018*, pages 1–8. IEEE, 2018. doi:10.1109/ICRA.2018.8461249. URL <https://doi.org/10.1109/ICRA.2018.8461249>.

-
- [418] Charles Y Zheng, Francisco Pereira, Chris I Baker, and Martin N Hebart. Revealing interpretable object representations from human behavior. *Seventh International Conference on Learning Representations, ICLR*, 2019.
- [419] Chengxu Zhuang, Siming Yan, Aran Nayebi, Martin Schrimpf, Michael C Frank, James J DiCarlo, and Daniel LK Yamins. Unsupervised neural network models of the ventral visual stream. *Proceedings of the National Academy of Sciences*, 118(3):e2014196118, 2021.
- [420] Daniel M Ziegler, Nisan Stiennon, Jeffrey Wu, Tom B Brown, Alec Radford, Dario Amodei, Paul Christiano, and Geoffrey Irving. Fine-tuning language models from human preferences. *arXiv preprint arXiv:1909.08593*, 2019.
- [421] Andy Zou, Long Phan, Sarah Chen, James Campbell, Phillip Guo, Richard Ren, Alexander Pan, Xuwang Yin, Mantas Mazeika, Ann-Kathrin Dombrowski, Shashwat Goel, Nathaniel Li, Michael J. Byun, Zifan Wang, Alex Mallen, Steven Basart, Sanmi Koyejo, Dawn Song, Matt Fredrikson, J. Zico Kolter, and Dan Hendrycks. Representation engineering: A top-down approach to AI transparency. *arXiv:2310.01405*, 2023.