

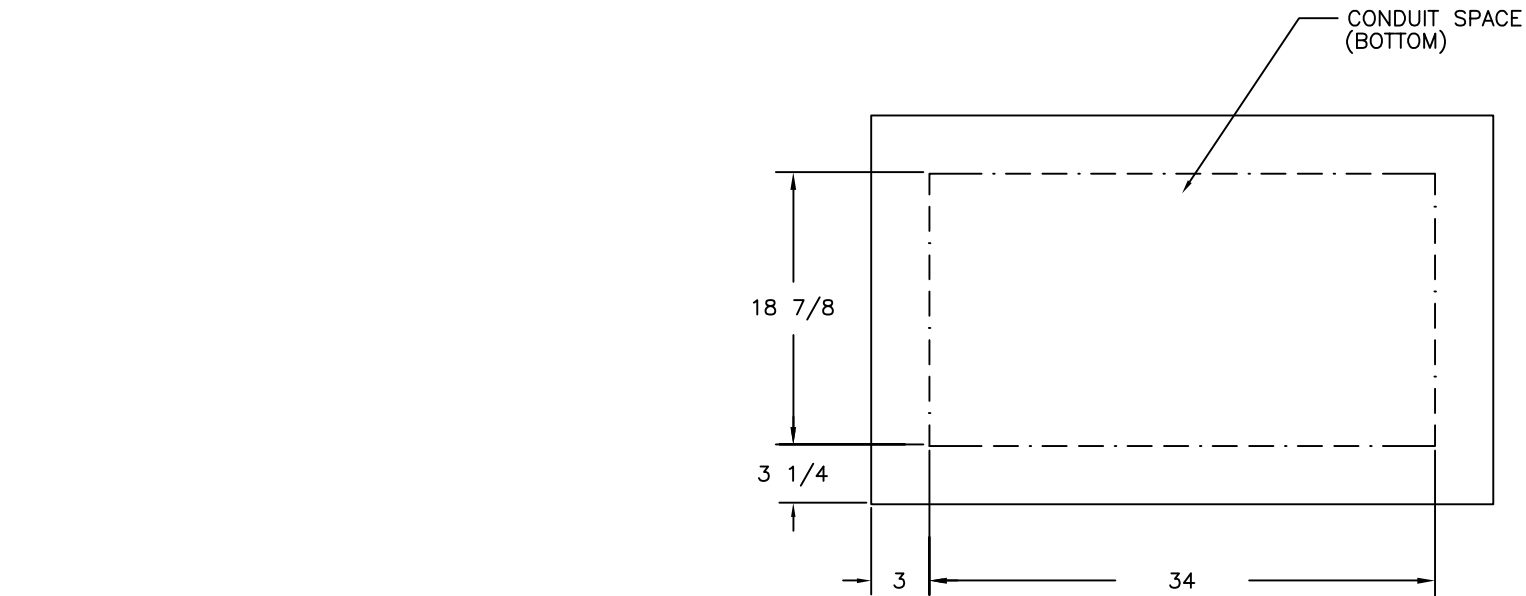
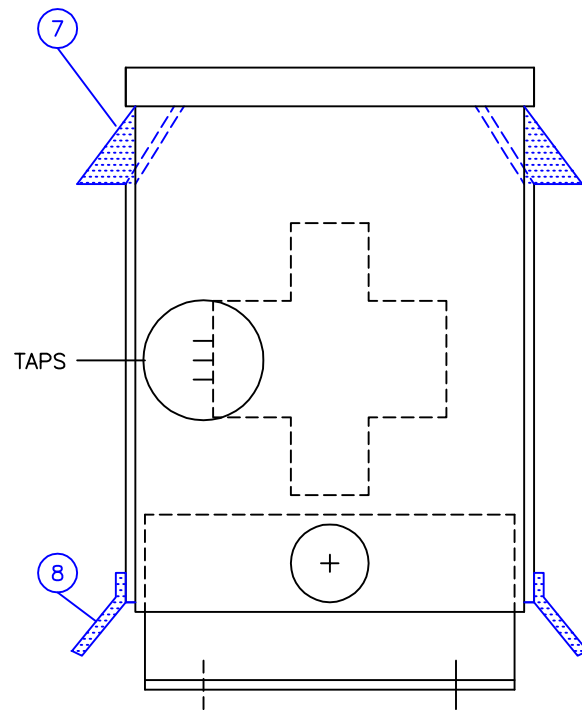


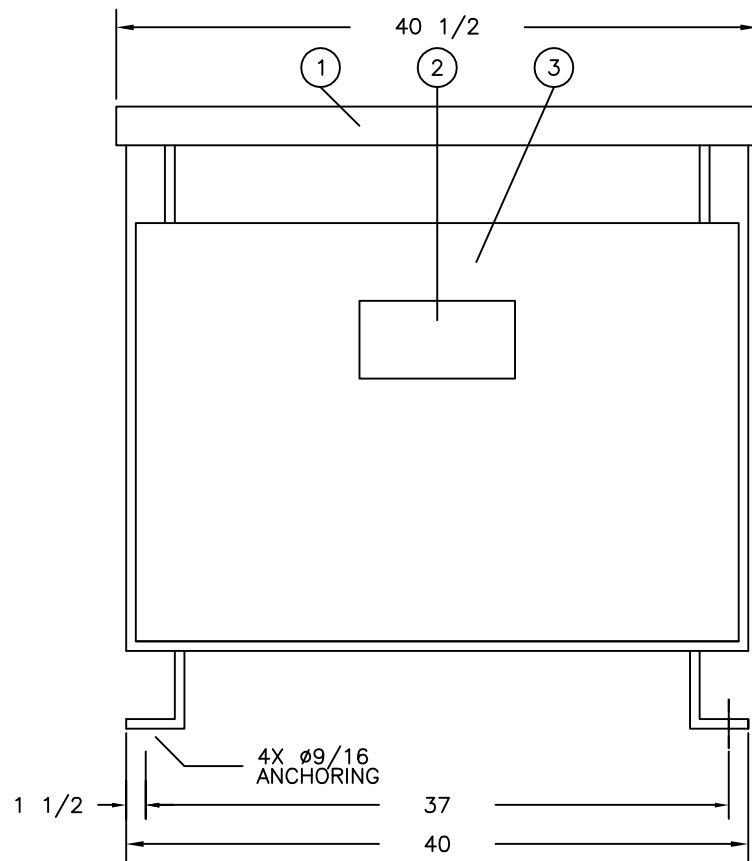

REFERENCE ONLY

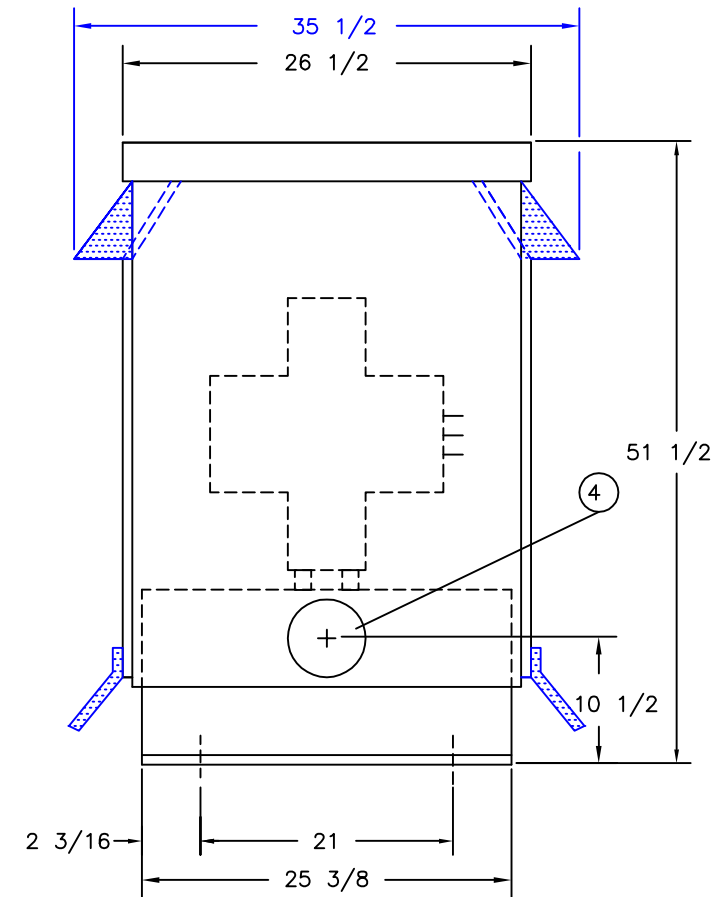

NOTES:

- 1) THIS DRAWING IS NOT FOR CONSTRUCTION PURPOSES. VERIFY WITH FACTORY BEFORE CONSTRUCTION.
- 2) K FACTOR MIGHT CHANGE CASE DIMENSIONS, CHECK WITH FACTORY BEFORE CONSTRUCTION.
- 3) TRANSFORMERS ARE MANUFACTURED AND TESTED PER APPLICABLE ANSI, NEMA AND IEEE STDS, LATEST REVISION.
- 4) UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES WITH $\pm 1/4$ " TOLERANCE.
- 5) TRANSFORMER IS U.L. LISTED.
- 6) WEIGHTS, DIMENSIONS & CONSTRUCTION MAY CHANGE WITHOUT PRIOR NOTICE.

PARTS LIST		
ITEM	QTY	DESCRIPTION
1	1	TOP COVER - REMOVABLE
2	1	DIAGRAMATIC NAMEPLATE
3	2	FRONT & REAR PANEL - REMOVABLE
4	2	PROVISION FOR 5" KNOCKOUT
7	2	WEATHERSHIELD, OUTDOOR UNITS ONLY
8	2	RAIN DEFLECTOR, OUTDOOR UNITS ONLY

TRANSFORMER'S PROPERTIES						
KVA RATING	TEMP RISE	APPRX WT (LBS)		TAPS @ PRI. VOLTS		
		ALUM	COPPER	480	240	208
150	-	-	-	-	-	-
	80°C	1090	1240	2A4B 2.5%	2A4B 2.5%	2A4B 2.5%
225	150°C	1280	1440	2A4B 2.5%	2A4B 2.5%	1A2B 5%
	115°C	1380	1520	2A4B 2.5%	2A4B 2.5%	1A2B 5%
300	80°C	1430	1640	2A4B 2.5%	1A2B 5%	1A2B 5%
	150°C	1520	1730	2A4B 2.5%	1A2B 5%	1A2B 5%
300	115°C	2100	1870	2A4B 2.5%	1A2B 5%	1A2B 5%
	-	-	-	-	-	-

S.O. NO: ---
DWG FOR: ☐ RECORD ☐ APPROVAL ☐ QUOTE

CUST/JOB NAME:
CUST ORDER NO:
SERIAL NO:
ID TAG:

KVA:
HIGH VOLTAGE:
LOW VOLTAGE:
HV TAPS: SEE TABLE
HV-KV BIL: 10
LV-KV BIL: 10
PHASE: 3
FREQ-HZ: 60
TEMP RISE-°C:
COOLING CLASS: AA
COOLING FLUID:
WINDING COND:
PAINT/COATING: ANSI 61 GRAY
APPRX WT-LBS: SEE TABLE

HV COORD: -
LV COORD: -

PAGE 1 OF 1		SCALE: NONE	TITLE: DRY TRANSFORMER OUTLINE- OUTDOOR 600V DRY TYPE 'D' GENERAL PURPOSE	
BY		DATE		
CADD: ME		9/18/03		
CHKD:				
APPD:				
REVISIONS				



3430 E. 26TH STREET, VERNON, CA 90056 • TEL (213) 726-6888 • FAX (213) 726-8224

CAD NO.	REV.
---	---