

AL54-CY Cylindrical Lock

Bring Access Control to Every Door



Overview

The AL54-CY Cylindrical Lock empowers organizations to upgrade traditional lock-and-key systems with a smart, connected solution. With access control across every door, organizations can centrally manage all doors and immediately trigger changes — like initiating lockdowns — with a single click via web or mobile.

Organizations can choose from three variations with different key cores: conventional, full-size interchangeable, and small format interchangeable.

All locks can be easily set up right within Verkada Command, requiring no additional software. Admins can receive proactive alerts about low battery status, lock or hub disconnection, and change in door state. Coupled with over-the-air firmware updates, these features help ensure locks are fully functional at all times.

End users can enjoy a seamless unlock experience, using a variety of credentials — including hands-free Bluetooth intent unlock — to access doors, with clear LED feedback to confirm the door's status.

Key features

Automated latch bolt monitoring

Ensure doors are closed, locked, and latched with a built-in latch bolt monitor and door position indicator. Receive proactive alerts for when doors are held open.

Long-range wireless connection

Using Verkada's VLink protocol, immediately connect up to 16 locks with the WH32 wireless hub. The hub is wired to a Verkada access controller and can support any lock within a 150 feet radius or up to 2000 feet with a clear line of sight.

Local schedule override button

Trigger immediate changes to a door's schedule — like access controlled to unlocked, and unlocked back to access controlled — with a simple button press directly on the lock.

Built to last

With a ten-year warranty, UL's three-hour fire rating, and extensive cycle testing, the AL54-CY is a robust solution for a variety of doors and environments.

LF-, HF-, Bluetooth, and NFC support

Unlock doors with a wide array of credentials, from low-frequency proximity cards and high-frequency NFC credentials such as Apple Wallet. A built-in reflective sensor also supports Bluetooth Intent Unlock.

Intuitive interior and exterior LED feedback

Gain instant visual confirmation of a door's status — access granted, access denied, lockdown states, and connectivity status — on either side of the door based on the color and blinking pattern of the LED indicator.



AL54-CY

Tech Specs

Variations

Note: The locks do not ship with key cores. A plastic construction key core is included with the lock, but not the actual key core itself. See "Compatible Cylinders and Keys" for more information on existing cores which are supported.

AL54-CY-CC-01-26-HW



Cylindrical Lock, Conventional Core

AL54-CY-FC-01-26-HW



Cylindrical Lock, Full Size
Interchangeable Core

AL54-CY-SC-01-26-HW



Cylindrical Lock, Small Format
Interchangeable Core

General

Dimensions (with handle)	Exterior Assembly: 177.3 x 170.8 x 91.9 mm Interior Assembly: 265.9 x 171.4 x 92.4 mm	Dimensions (without handle)	Exterior Assembly: 177.3 x 82.3 x 35.0 mm Interior Assembly: 266.0 x 83.6 x 35.5 mm
Weight	3.16 kg	Operating Temperature	-35° to 55°C (-31° to 131°F)
Operating Humidity	5-90%	Ratings	IP65, IK08

Mechanical Compatibility

Door Thickness	1-3/8 to 2 inch	Backset	2-3/8, 2-3/4 inch
Handing	Field Reversible	Door Position Indicator	Included in box, needs installation
Lever	Zinc Die Cast, Plated	Finish	Satin Chrome Plated
Strike Plate	Included in the box: -9106 with lip 1-1/8" x 2-3/4" -9109 ANSI with lip 1-1/4" x 4 7/8"	Latch Bolt Monitor	Built-in
Compatible Cylinders and Keys	Schlage Conventional Core: 6 Pin Schlage FSIC: 6 Pin SFIC: 6 Pin, 7 Pin Any key designed for one of the cores listed above is compatible		



AL54-CY

Tech Specs

Power

Power Supply	8XAA L91 lithium batteries (nominal voltage \geq 1.5V)	Battery Life	18 months ¹
Backup Power	Provided via a USB-C cable connected to a 5V power bank	Voltage Range	5V to 7.2V
Maximum Current Requirement	1.8A (peak), 5.5 mA (average)		


Connectivity & Communication

System Interface	Wireless communication via VLink protocol to Verkada wireless hub & access controller	Wireless Frequency Range	915.0 - 915.7 MHz
Wireless Communication Range	Up to 150 ft with obstructions Up to 2000 ft with clear line of sight	Audio-visual Communication	LED Feedback (Interior and Exterior), Buzzer Feedback

Credentials

Credential Technologies	Low Frequency (125 KHz) High Frequency (13.56 MHz) Mobile NFC (13.56MHz) Bluetooth Low Energy (2.4GHz)	Read Range	Low Frequency (125 KHz): up to 8cm High Frequency (13.56 MHz): up to 4cm Mobile NFC (13.56MHz): up to 4cm Bluetooth Low Energy (2.4GHz): up to 8cm
Credential Validation Time	<1 second		

Dimensions

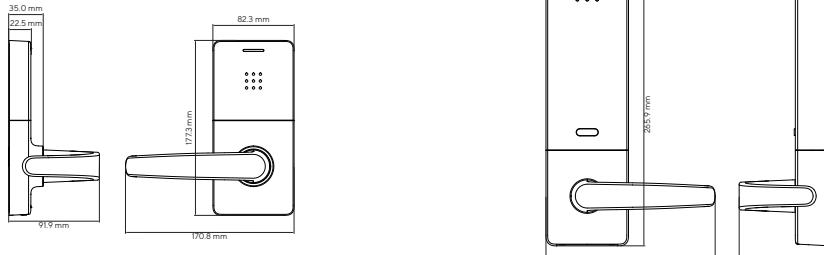

Compliance & Availability

Compliance	FCC, IC, UL10C, ANSI/BHMA A156.2 Grade 1 ² , UL294 (pending), ULC60389-11-1 (pending), ANSI/BHMA A156.25 (pending)	Availability	USA, CAN
-------------------	---	---------------------	----------

1. Battery life depends on the radio environment and usage. The battery life featured on this datasheet has been calculated using the following assumptions: clean radio environment, polling time of 10 seconds, 60 access events per day, and door open events on ingress and egress.

2. ANSI/BHMA A156.2 certification was completed on the AL54-CY-CC-01-26-HW model.



Communication Architecture

Variations


The AL54-CY requires the use of a dedicated AC12 access controller and a WH32 wireless hub to set up the lock. The AL54-CY is not compatible with other controllers or wireless hubs. Each AC12 controller can support up to 16 locks and can connect to 1-4 WH32 wireless hubs. WH32 hubs connect to the AC12 controller via RS485.

There are two primary configurations¹:

Direct connection (1-2 hubs)	Daisy-chaining (3-4 Hubs)
Organizations can directly connect one or two WH32 hubs to the reader ports on the AC12. In this setup, the hubs must be within 1,500 feet of the AC12.	For configurations requiring three or four hubs, two hubs are connected directly to the AC12 reader ports, and each of these two hubs can then be daisy-chained to one additional hub via RS-485. In this scenario, the hubs must be within 300 feet of the AC12 or any adjacent WH32 hub.

The VLink wireless range between the locks and the hub can vary depending on the environment. In typical indoor environments, the locks must be within 100-150 feet of the WH32 hub. In unobstructed environments with clear line of sight, this range can extend up to 2,000 feet from the hub.

See below for an example set up:

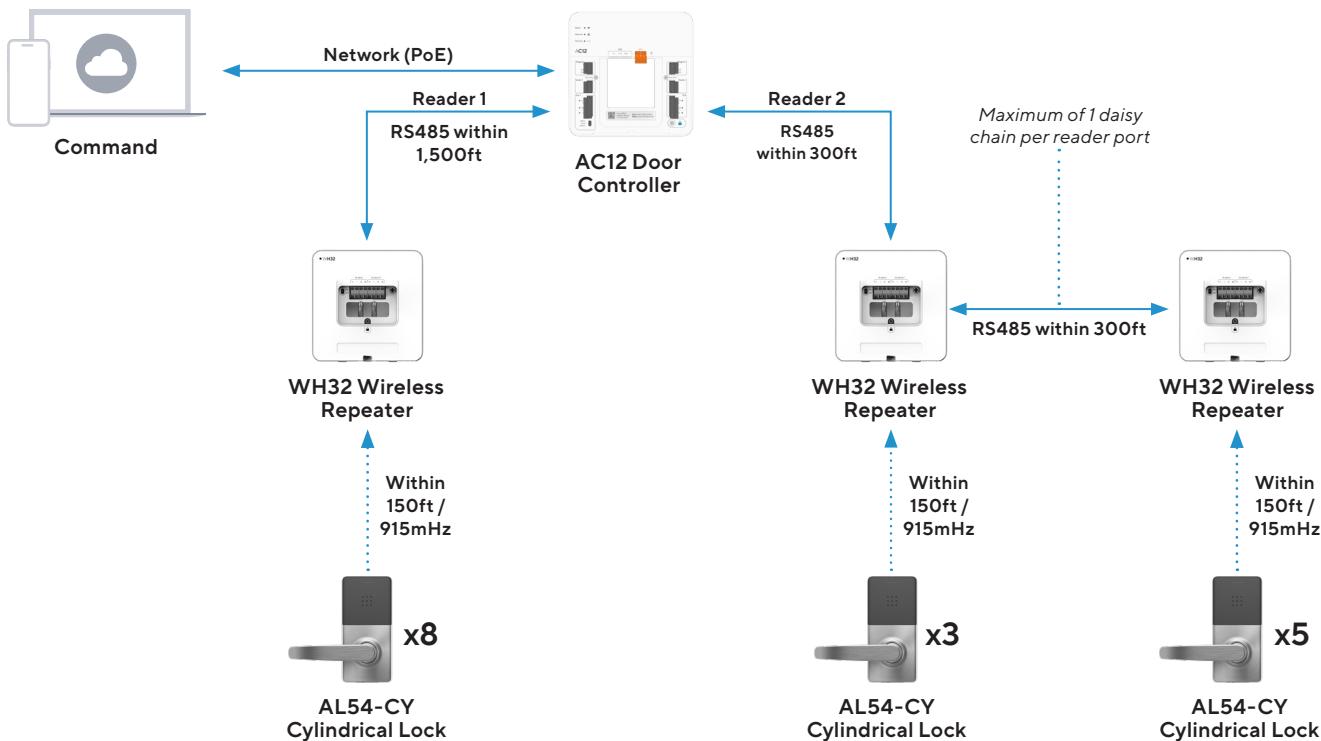

1. UL294 compliance testing has been completed on the one hub direct connection set-up.



WH32

Tech Specs

Power and network

Power Consumption	0.18W standby, 27W maximum (5mA - 750mA current draw)	Power Input	Hub mode: 10-36V DC via RS485
Backup Battery (Internal)	1200 mAh 24 hours of backup with typical use		

General

Dimensions	Height: 5.5" (14.0 cm) Width: 5.5" (14.0 cm) Depth: 1.3" (3.4 cm)	Operating Temperature and Humidity	32 to 122° F (0 to 50° C) 0-90% RH non-condensing
Tamper Detection	Yes	Warranty	10 years
Certifications	FCC, IC, RCM, CE, UL/cUL/IEC 62368-1	Weight	1.3 lb (0.6 kg)

Installation

Included Accessories	Mount plate, T10 Security Torx screwdriver, 4x wall screws, 4x wall anchors	Mounting Options	Wall or ceiling mount
-----------------------------	---	-------------------------	-----------------------



Ordering Information

Wireless Lock pricing

Model Number	Description	Cost (MSRP) USD
AL54-CY-CC-01-26-HW	AL54 Cylindrical Lock, Conventional Core	\$1,399
AL54-CY-FC-01-26-HW	AL54 Cylindrical Lock, Full Size Interchangeable Core	\$1,399
AL54-CY-SC-01-26-HW	AL54 Cylindrical Lock, Small Format Interchangeable Core	\$1,399

Controller and Hub pricing

Model Number	Description	Cost (MSRP) USD
AC12-HW	AC12 One-Door Controller	\$799
WH32-HW	WH32 Wireless Hub	\$299

Accessories pricing

Model Number	Description	Cost (MSRP) USD
ACC-RS485-2M	Verkada 2m RS485 Cable	\$10
ACC-DR-CY-1	AL54 Cylindrical Door Reinforcer (2.375" Backset, 1.375" Door Thickness)	\$99
ACC-DR-CY-2	AL54 Cylindrical Door Reinforcer (2.375" Backset, 1.75" Door Thickness)	\$99
ACC-DR-CY-3	AL54 Cylindrical Door Reinforcer (2.75" Backset, 1.375" Door Thickness)	\$99
ACC-DR-CY-4	AL54 Cylindrical Door Reinforcer (2.75" Backset, 1.75" Door Thickness)	\$99



Ordering Information

License pricing (New/Capacity Increase)

Model Number	Description	Cost (MSRP) USD
LIC-AC-1Y-CAP	1-Year Door License, Capacity Increase	\$249
LIC-AC-3Y-CAP	3-Year Door License, Capacity Increase	\$599
LIC-AC-5Y-CAP	5-Year Door License, Capacity Increase	\$999
LIC-AC-10Y-CAP	10-Year Door License, Capacity Increase	\$1,999

License pricing (Renewal)

Model Number	Description	Cost (MSRP) USD
LIC-AC-1Y-RNW	1-Year Door License, Renewal	\$249
LIC-AC-3Y-RNW	3-Year Door License, Renewal	\$599
LIC-AC-5Y-RNW	5-Year Door License, Renewal	\$999
LIC-AC-10Y-RNW	10-Year Door License, Renewal	\$1,999