

CY63-E Two-Camera Multisensor

Bidirectional 4K Coverage From a Single Install Point



Overview

The CY63-E two-camera multisensor features two independent and adjustable image sensors which together support expansive 4K coverage from a single install point. A pair of 1 / 2.8" progressive CMOS image sensors, each with 2.55x optical zoom and 30 meters / 98 feet of IR range, enable vivid and highly-detailed image quality in varied lighting conditions. The CY63-E includes a CV72S Ambarella processor to support advanced analytics like [AI-powered search](#), [AI-powered unified timeline](#), [occupancy trends](#), line crossing, loitering, and person of interest (POI) alerts. The camera excels in high-traffic areas including busy hallways, building entrances and exits, and lobbies, where detailed people and vehicle capture play a key role in expediting investigations.

The CY63-E's robust metal housing, IP66/IP67 weather rating, and IK10 impact rating enable the device to withstand inclement weather and demanding environments. Constructed with efficient installation top-of-mind, the CY63-E features captive screws that remain attached to the mounting plate, a latch-based cable gland for easy PoE threading, a three-LED light status indicator, a built-in bubble level, and alignment presets that guide each lens into optimal positions for common viewing angles.

Key features

Superior image quality

- Two 1 / 2.8" progressive CMOS image sensors
- 4K resolution
- Two varifocal lenses with 2.55x optical zoom per lens
- 30 meters / 98 feet of IR range for nighttime viewing

Expansive coverage

- Individually adjustable and repositionable sensor heads
- Total field of view up to 180°

Streamlined installation

- Single PoE+ cable required
- Latch-based cable gland for easy PoE threading
- Alignment presets for optimal lens positioning
- Physical and digital mute switches to easily enable or disable audio

Durability and weather protection

- Robust metal housing
- IP66/IP67 weather rating
- IK10 impact rating
- Operability between -40°C to 50°C / -40°F to 122°F

Hybrid cloud architecture

- Onboard storage and processing for reduced bandwidth consumption and coverage at scale
- 30 - 120 days (1TB - 4TB) of onboard storage
- Redundant cloud backup and unlimited cloud-based archiving of footage

Advanced analytics

- Onboard CV72S Ambarella processor enables people and vehicle analytics
- AI-powered search and AI-powered alerts
- Occupancy trends for operational insights



CY63-E

Tech Specs

Camera features

Image Sensor	2x1/2.8" Progressive CMOS	Shutter Speed	1 / 30 sec. to 1 / 10,000 sec.
Sensor Resolution¹	2x4K (3856 x 2228)	Day/Night	IR-cut filter for day and night function
Lens Type	Varifocal; Motorized zoom	IR Cut Filter	Yes
Focal Length	3.18 - 8.12mm	IR Range	30m / 98ft; non-adjustable
Aperture	F1.9 - F3.24	Minimum Illumination	0.009 lux @ F1.9 (Color) 0 lux with IR Illuminators on
Iris	N/A	Onboard Storage	Capacity: From 1TB to 4TB Card: MicroSD, SDXC
Field of View (after LDC²)	Horizontal: 115° - 44° (107° - 42°) Vertical: 61° - 25° (60° - 24°) Diagonal: 142° - 48° (123° - 48°)	CPU	Ambarella CV72S66
Sensor Movement	Tilt: +0° to 60° for each lens from upright Pan: +/- 90° for each lens Rotation: +/- 90° for each lens		

Standard video settings

Compression	H.265, H.264	Historical Video Settings	Adaptive quality ¹
Frame Rate³	24fps / sensor	WDR Technology	True WDR, dual exposure
Live Streaming Settings (Per Head)	High quality (HQ): Up to 3,000 Kbps (default) Standard quality (SQ): Up to 600 Kbps		

Standard audio settings

Audio	Supported	Interface	Built-in microphone
Audio Capacity	One-way audio	Effective Range	5m / 16ft

Power and network

Power Input⁴	IEEE 802.3at Type 2 PoE+	Connectivity	RJ-45 cable connector for network/PoE connection; 10 / 100 / 1000 Mbps
Power Consumption⁴	With IR: 37-57V, 0.60-0.45A, 25.5W Without IR: 37-57V, 0.37-0.24A, 13.5W Extended temperature range: 37-57V, 0.60-0.45A, 25.5W	RTSP	RTSP 1.0 RFC 2326 Max concurrent streams: 4 (2 per camera head) Audio support: Yes

1. All our cameras record in "adaptive quality," capturing both standard (SQ) and high quality (HQ) streams. SQ video is stored up to the amount of retention specified by the customer. The amount of HQ video stored on the camera will depend on the amount of motion detected by the camera over time. To learn more, visit our website: <https://docs.verkada.com/docs/adaptive-quality-recording-whitepaper.pdf>

2. Lens Distortion Correction (LDC) crops the sensor field of view to deliver a rectified, undistorted output image.

3. Frame rate can be adjusted by support.

4. Extended temperature range includes operating temperatures below -10°C / 14°F and assumes IR will be enabled.



CY63-E


Tech Specs

General

Operating Temperature	-40°C to 50°C / -40°F to 122°F	LED Indicator	System power, status indicator and debug indicator
Humidity	0 to 90%	Warranty	10 Years
Certifications	FCC, ICES, CE, UKCA, RCM, VCCI, UL/cUL/IEC 62368-1, IEC 62471, IP66/67 weather rating, IK10 impact rating, FY2019 NDAA compliant	Included Accessories	T10 security screwdriver, mount plate with leveler, 4x wall mount screws, 4x wall anchors, desiccant, conduit adapter, large cable gland

Mechanical

Weight	Camera: 2000g / 70.55 oz Mount plate: 400g / 14.11 oz	Body	Aluminum
Dimensions	L: 253.0mm / 9.96in W: 143.0mm / 5.63in H: 115.0mm / 4.53in with mount plate H: 110.0mm / 4.33in without mount plate		

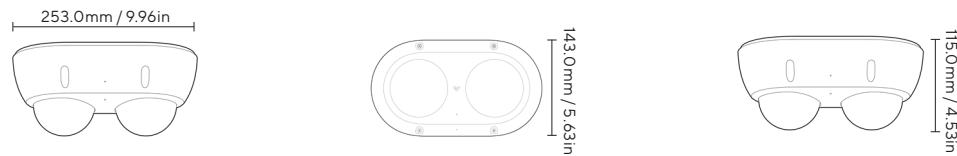

Software capabilities

Alerts⁵	Camera status, motion detection, people detection, vehicle detection, person of interest detection, crowd detection, line-crossing detection, loitering detection, AI-powered alerts	Streaming and Storage⁵	Cloud backup, configurable retention days, selectable storage location, low bandwidth mode, timelapse, RTSP
People Analytics⁵	People search, attribute search, face search, occupancy trends, motion search, trajectory analysis, selective face blurring, AI-powered search	Sharing and Privacy⁵	Live links, live face blur, privacy regions, audit log
Vehicle Analytics⁵	Vehicle search, attribute search, motion search, trajectory analysis, occupancy trends, AI-powered search		

5. All the listed features can be enabled independently for each camera head.



Ordering Information

CY63-E pricing

Model Number	MP ¹	WDR	Lens	IR Range	Onboard Storage	Maximum SQ Onboard Retention ¹	People/Vehicle Analytics	Cost (MSRP) <small>USD</small>
CY63-1TBE-HW	2 x 4K	✓	Zoom	30m / 98ft	1TB	30 Days	✓	\$2,799
CY63-2TBE-HW	2 x 4K	✓	Zoom	30m / 98ft	2TB	60 Days	✓	\$4,099
CY63-3TBE-HW	2 x 4K	✓	Zoom	30m / 98ft	3TB	90 Days	✓	\$5,399
CY63-4TBE-HW	2 x 4K	✓	Zoom	30m / 98ft	4TB	120 Days	✓	\$6,699

1. All our cameras record in "adaptive quality," capturing both standard and high quality streams. Standard quality (SQ) video is stored up to the amount of retention specified by the customer. The amount of high quality video stored on the camera will depend on the amount of motion detected by the camera over time. To learn more, visit our website: <https://docs.verkada.com/docs/adaptive-quality-recording-whitepaper.pdf>



Ordering Information

Video Security Cloud License pricing (New/Capacity Increase)²

Model Number	Description	Cost (MSRP) USD
LIC-CAM-MLT2-1Y-CAP	1-Year Two-Camera Multisensor License, Capacity Increase	\$379
LIC-CAM-MLT2-3Y-CAP	3-Year Two-Camera Multisensor License, Capacity Increase	\$1,099
LIC-CAM-MLT2-5Y-CAP	5-Year Two-Camera Multisensor License, Capacity Increase	\$1,799
LIC-CAM-MLT2-10Y-CAP	10-Year Two-Camera Multisensor License, Capacity Increase	\$3,499

Video Security Cloud License pricing (Renewal)²

Model Number	Description	Cost (MSRP) USD
LIC-CAM-MLT2-1Y-RNW	1-Year Two-Camera Multisensor License, Renewal	\$379
LIC-CAM-MLT2-3Y-RNW	3-Year Two-Camera Multisensor License, Renewal	\$1,099
LIC-CAM-MLT2-5Y-RNW	5-Year Two-Camera Multisensor License, Renewal	\$1,799
LIC-CAM-MLT2-10Y-RNW	10-Year Two-Camera Multisensor License, Renewal	\$3,499

2. Two-camera multisensors require a separate license from other Verkada Cameras.



Ordering Information

Accessories pricing

Model Number	Description	Cost (MSRP) USD
ACC-MNT-ARM-1	Arm Mount	\$99
ACC-MNT-CORNER-1	Corner Mount	\$199
ACC-MNT-POLE-1	Pole Mount	\$209
ACC-MNT-XLARM-1	Large Arm Mount	\$159
ACC-MNT-YJBOX-1	Two-Camera Multisensor Junction Box Mount	\$149
ACC-MNT-YPEND-1	Two-Camera Multisensor Pendant Cap Mount	\$109
ACC-POE-90W-AU	90W PoE++ (802.3bt Type 4) Injector, GigE, Indoor, Australia Type I Plug	\$169
ACC-POE-90W-EU	90W PoE++ (802.3bt Type 4) Injector, GigE, Indoor, Europe Type F Plug	\$169
ACC-POE-90W-NA	90W PoE++ (802.3bt Type 4) Injector, GigE, Indoor, North America Type B Plug	\$169
ACC-POE-90W-UK	90W PoE++ (802.3bt Type 4) Injector, GigE, Indoor, United Kingdom Type G Plug	\$169
INJ-POE-PLUS	PoE Plus (802.3at) Injector, GigE	\$129



Ordering Information

Viewing Station pricing

Model Number	Description	Cost (MSRP) USD
VX52-HW	VX52 Viewing Station	\$499

Viewing Station License pricing (New/Capacity Increase)

Model Number	Description	Cost (MSRP) USD
LIC-VX-1Y-CAP	1-Year Viewing Station License, Capacity Increase	\$499
LIC-VX-3Y-CAP	3-Year Viewing Station License, Capacity Increase	\$1,299
LIC-VX-5Y-CAP	5-Year Viewing Station License, Capacity Increase	\$1,999
LIC-VX-10Y-CAP	10-Year Viewing Station License, Capacity Increase	\$3,999

Viewing Station License pricing (Renewal)

Model Number	Description	Cost (MSRP) USD
LIC-VX-1Y-RNW	1-Year Viewing Station License, Renewal	\$499
LIC-VX-3Y-RNW	3-Year Viewing Station License, Renewal	\$1,299
LIC-VX-5Y-RNW	5-Year Viewing Station License, Renewal	\$1,999
LIC-VX-10Y-RNW	10-Year Viewing Station License, Renewal	\$3,999